
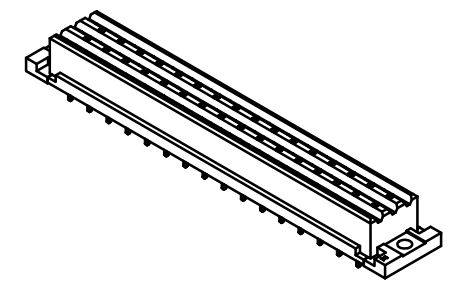


Elastische Einpresszone / *compliant pressfit zone*  
 Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*  
 Bauart 7 / *type 7*  
 Lochaufbau siehe ERNI-Spezifikation 164062 / *hole design see ERNI-specification 164062*

- 1)  $1.0^{+0.09}_{-0.06}$  Durchmesser des metallisierten Loches
- $1.0^{+0.09}_{-0.06}$  Diameter of finished plated-through hole

**Leiterplatten-Layout Vorschlag**  
*PCB-Layout Proposal*

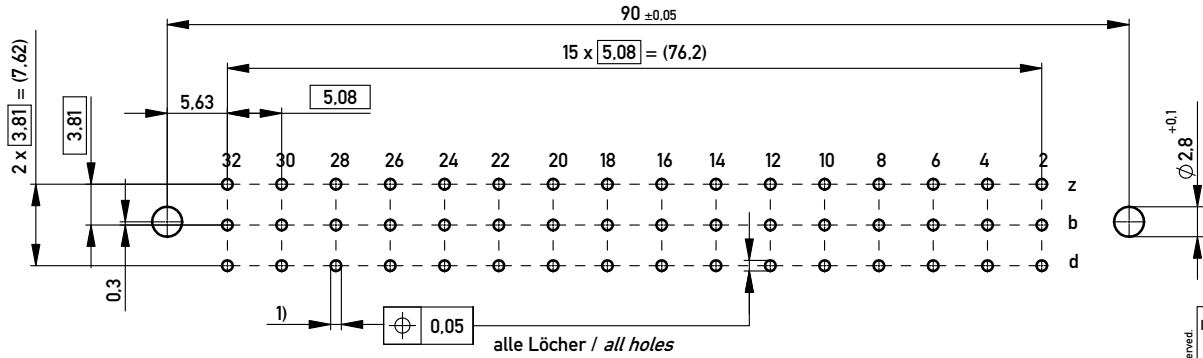

Fehlende Masse und Angaben nach DIN EN 60603-2 / *Missing information and dimensions according to DIN EN 60603-2*  
 Sonstige Angaben siehe Fertigungsunterlagen / *Additional indications please see the production documentation*

|  |  |   |  |                |
|--|--|---|--|----------------|
| Information:<br><br>All rights reserved.<br>Only for Information.<br>To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Tolerances<br><br>All Dimensions in mm | Scale 2:1   |  |                |
|  |  | Designation<br><b>Federleiste F48 flach EE</b><br><i>Fem.Con. F48 flat Pressfit</i> |  |                |
| www.ERNI.com   |  | <b>354746</b>   |  | I<br><b>A3</b> |
| a<br>Index   | 08.08.2013<br>Date                     | Class STVF  |  |                |

Copyright by ERNI GmbH  
 Proprietary notice pursuant to ISO 9006 to be observed.