


# NSYTRV62TT

## SCREW TERMINAL, FEED THROUGH, MEASURING TRANSDUCER, 2 POINTS, 6MM<sup>2</sup>, G

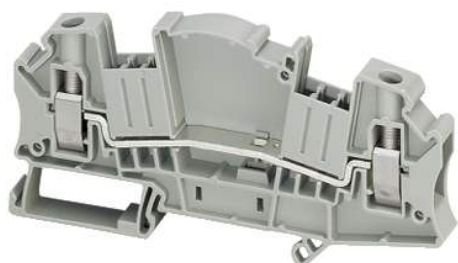

### Main

Range	Lineryg
Product name	Lineryg TR
Product or Component Type	Terminal block
Device short name	TRV
Accessory / separate part category	Connection accessory
Terminal block type	Passthrough
Terminal block level	1
Mounting Mode	Clip-on
Nominal cross section	0.01 in <sup>2</sup> (6 mm <sup>2</sup> )
Length	3.97 in (100.8 mm)
Color	Gray
Quantity per Set	Set of 50

### Complementary

Width	0.32 in (8.2 mm)
Height	1.95 in (49.6 mm)
Connections - terminals	1 x screw terminal upstream M4) 1 x screw terminal downstream M4)
Number of connections	2
Connection position	Inclined
Number of measurement input	6
Cable cross section	0.00...0.02 In <sup>2</sup> (0.2...10 mm <sup>2</sup> ), solid 0.00...0.02 In <sup>2</sup> (0.2...10 mm <sup>2</sup> ), flexible without cable end 0.00...0.01 in <sup>2</sup> (0.2...6 mm <sup>2</sup> ), flexible with cable end
Tightening torque	13.28...15.93 lbf.in (1.5...1.8 N.m)
Wire stripping length	0.39 in (10 mm)
Tool type	Connection screwdriver Disconnection screwdriver
[Ue] rated operational voltage	500 V EN/IEC 60947-7-1 600 V cURus 600 V CSA
Line Rated Current	30 A EN/IEC 60947-7-1 30 A cURus 30 A CSA
Material	Polyamide 6/6 insulating case Copper alloy connector and screw Copper alloy commoning link Chromium-nickel steel spring
Dielectric loss	0.01 at 1 MHz IEC 60250 0.01 at 1 MHz VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 MΩ.M IEC 60093 10000 MΩ.m VDE 0303-T30
Surface resistance	1000 GΩ IEC 60093 1000 GΩ VDE 0303-T30
Creep resistance	500 CTI (> 400 kV) IEC 60093 500 CTI (> 400 kV) VDE 0303-T30
Flame retardance	V0 0.03 in (0.8 mm) UL 94

Net Weight	0.90 oz (25.4 g)
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product Compatibility	Spacial enclosures

## Environment

Product Certifications	EAC CSA cURus
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...266 °F (-40...130 °C) IEC 60216-1 -40...266 °F (-40...130 °C) VDE 0304-T21

## Ordering and shipping details

Category	21715-IEC TERMINAL BLOCKS-NSY,AM1,DF6,GK1
Discount Schedule	CP5
GTIN	3606480532405
Nbr. of units in pkg.	1
Package weight(Lbs)	0.85 oz (24.0 g)
Returnability	No
Country of origin	PL

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.97 in (5 cm)
Package 1 width	2.76 in (7 cm)
Package 1 Length	10.63 in (27 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	200
Package 2 Weight	11.94 lb(US) (5.418 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Unit Type of Package 3	BB1
Number of Units in Package 3	50
Package 3 Weight	2.80 lb(US) (1.271 kg)
Package 3 Height	1.97 in (5 cm)
Package 3 width	2.76 in (7 cm)
Package 3 Length	10.63 in (27 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

---

Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Halogen content performance	Halogen free plastic parts product

---

### Contractual warranty

---

Warranty	18 months
----------	-----------

---