


1.Wiring Diagram.

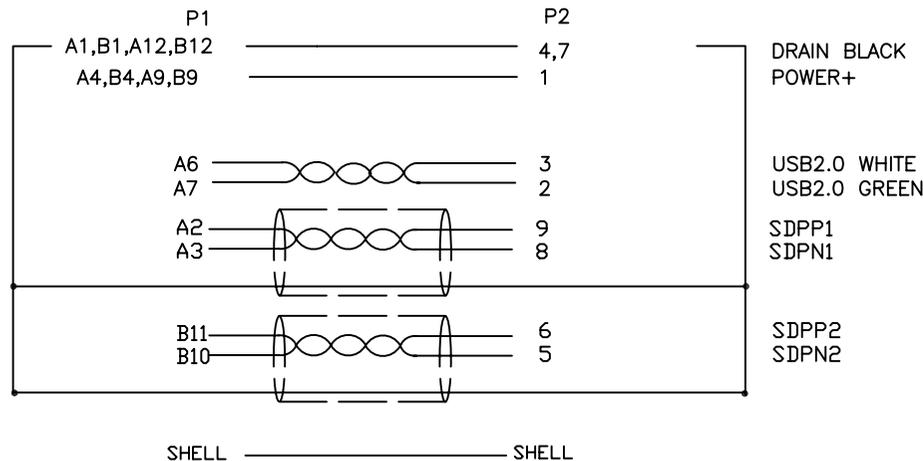

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE polybag.

NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	REV
4	COVER	ALUMINUM SHELL LIGHT RED	1		
3	PE	LLDPE 500026 6201 BLACK	16g		
2	CONN	TYPE C 3.0 MALE G/F BLACK W/PCB+R+C	1	P1	
1	CONN	USB3.0 A/F G/F BLUE	1	P2	

A	INITAL RELEASE	2018/04/20
REV	ECN#	DESCRIPTION
CnC Tech,LLC		TITLE
		USB C OTG Adapter,LIGHT RED
DRAWN EDWIN		DWN NO. 1005-1050-RE
DATE 2018/04/20		CUSTOMER P/N:
CHECKED		CUSTOMER:
APPROVAL		SHEET 1 OF 1

BILL OF MATERIAL