
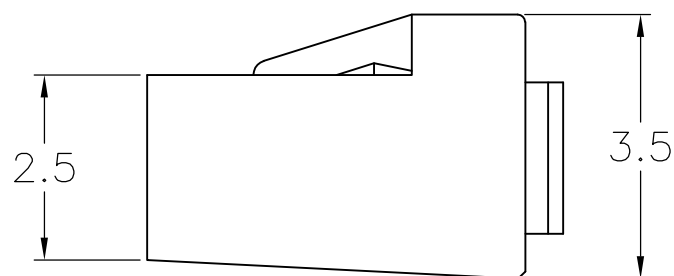
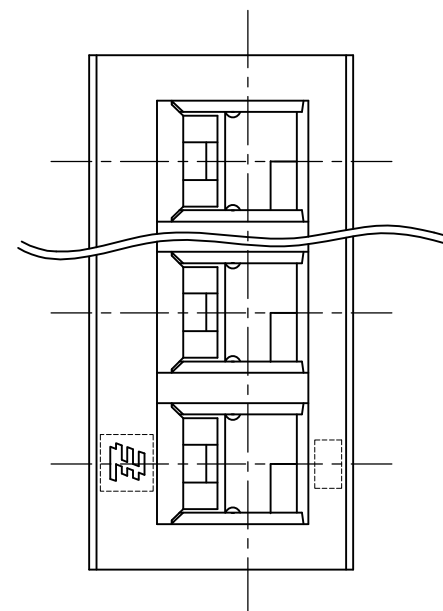
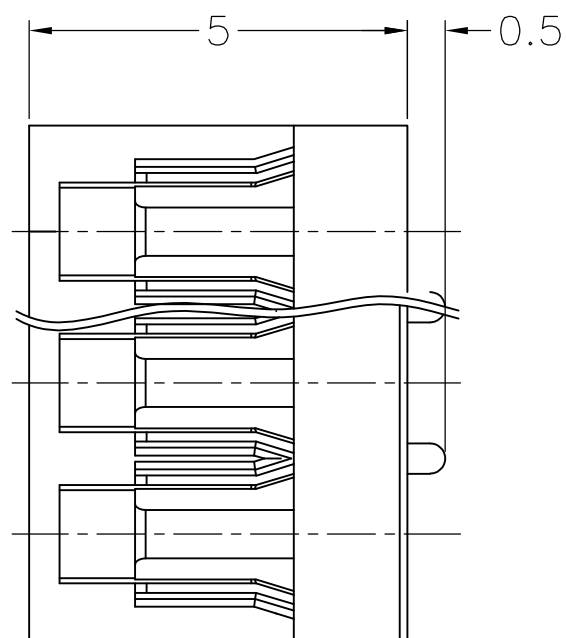


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D1		REVISED PER ECR-15-012855	19OCT2015	NK	GJ

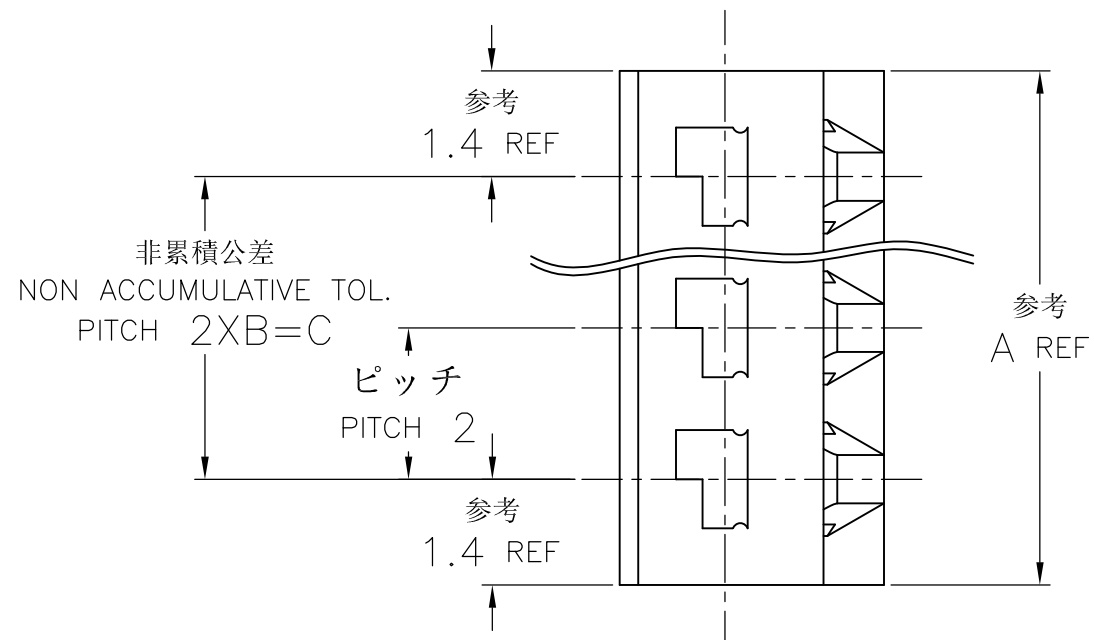

1 使用端子型番：172781,172782

2 一般公差：±0.4

1 APPLICABLE CONTACT: 172781,172782

2 GENERAL TOLERANCE: ±0.4

OBSOLETE	-15	30.8	12	24			1-	-5
	12	24.8	11	22			1-	-2
OBSOLETE	-10	20.8	9	18			1-	-0
OBSOLETE	-9	18.8	8	16				-9
	8	16.8	7	14				-8
	7	14.8	6	12				-7
	6	12.8	5	10				-6
	5	10.8	4	8				-5
	4	8.8	3	6				-4
	3	6.8	2	4				-3
	2	4.8	1	2	NATURAL (自然色)		172890-2	
極数	寸法			色調		型番		
POS	DIMENSION			COLOR		P/N		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.SATO	15NOV2007	 TE Connectivity	HEADER HOUSING		
DIMENSIONS: 単位: 耗 mm		CHK	S.MANABE	15NOV2007		LOW PROFILE MINI AMP-IN, 2MM PITCH		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD	S.MANABE	15NOV2007		製品規格		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC	108-5163			取付適用規格		
MATERIAL 材料		APPLICATION SPEC	114-5062		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
66ナイロン (UL94V-0)		FINISH 仕上	WEIGHT		A3	00779	G-172890	-
66NYLON (UL94V-0)		CUSTOMER DRAWING			SCALE	SHEET	REV	
					尺度	10:1	1 OF 1	D1