



Connectors > Circular Connectors > Standard Circular Connectors



Connector System: **Wire-to-Board, Wire-to-Wire**

Number of Positions: **12**

Sealable: **Yes**

Connector & Contact Terminates To: **Wire & Cable**

Contact Current Rating (Max): **1.5 A**

## Features

### Product Type Features

Product Type	Connector Assembly
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal

### Configuration Features

Number of Positions	12
Number of Power Positions	0
Number of Signal Positions	12
Contacts Preloaded	Yes

### Electrical Characteristics

EMI & RFI Protection & Suppression Type	Shielding
---	-----------

### Body Features

--	--



Shell Plating Material	Nickel
Shell Base Material	Zinc Alloy
Circular Connector Insulation Material Type	Polyamide 66 GF25

### Contact Features

Contact Current Rating (Max)	1.5 A
Reverse Gender	Yes
Contact Layout Arrangement	Circular
Circular Connector Contact Type	Socket

### Mechanical Attachment

Polarization Code	A
Mating Alignment Type	Keyed
Mating Retention	With

### Housing Features

Circular Connector Shell Size	12
-------------------------------	----

### Dimensions

Wire Size	.25 mm <sup>2</sup>
-----------	---------------------

### Usage Conditions

Operating Temperature Range	-40 – 80 °C[-40 – 176 °F]
-----------------------------	---------------------------

### Operation/Application

Circuit Application	Signal
Shielded	Yes

### Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.



Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 6-2271111-2  
M12, MALE, A CODE, 12P, PG9, SHIELDED(AU)



TE Part # 454643-E  
M12 M 12 A \* S \* 301 10,5 094 \* Y \* 9999



TE Part # 484784-E  
M12 M 12 A \* S \* 301 10,5 094 \*\*\* 9999



TE Part # 494518-E  
M12 M 12 A \* S \* 301 10,5 094 \* Y \* 9999

### Customers Also Bought



TE Part #DT04-08PA-L012  
REC, 8P, GRY, N, FLANGE, A



TE Part #T4142012121-000  
M12,FRONT MOUNT,MALE, A,12P, SOLDER PCB



TE Part #T4111012081-000  
M12 M, 8P GOLD A\_CODE S SHIELDED PG9




TE Part #DTP4S-BT-EN  
BOOT, 4P, PLG, ST, LONG, GRY



TE Part #2-2176094-6  
RP 2A 0.25W 221K 0.1% 25PPM 1K RL



TE Part #2-2176094-8  
RP 2A 0.25W 232K 0.1% 25PPM 1K RL

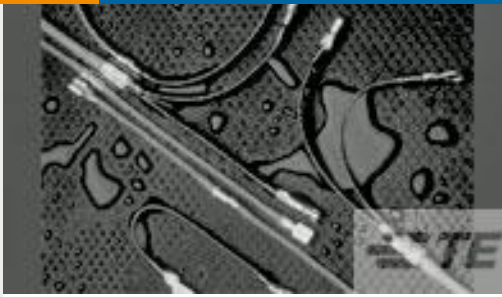

TE Part #857409-000  
B-106-1992



TE Part #2-2289729-0  
KIT, HOUSING, CPA, INLINE FEMALE, FAKRA



## Documents

### Product Drawings

[M12, FEMALE, A CODE, R/A, 12P, PG9, SHIELD\(AU\)](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_6-2271129-2\\_A1.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_6-2271129-2\\_A1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_6-2271129-2\\_A1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[M8 / M12 Connector System Catalog](#)

English

[M8 / M12 Connector System Catalog](#)

Japanese

### Product Specifications

[Product Specification](#)

English