
# 2134536-2 - ACTIVE

TE Internal #: 2134536-2 USB Connectors, A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Tape & Reel, Offset, Surface Mount, Cable-to-Board, Flange, 10000

### View on TE.com >



Connectors > Audio & Video Connectors > USB Connectors

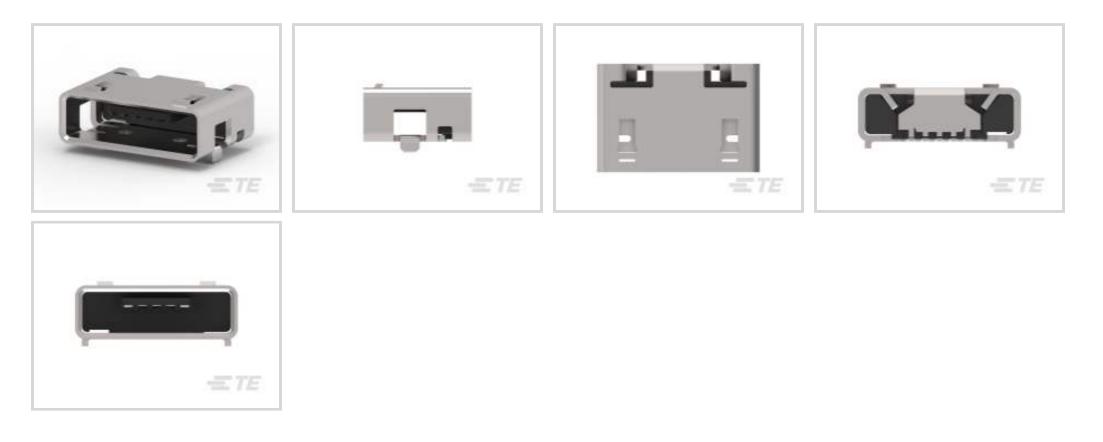

USB Adapter Type: A/B

USB Version: 2.0

Connector Profile: Micro

Connector & Housing Type: Receptacle

Number of Ports: 1

# Features

Product Type Features

| Integral Locking Latch            | Without               |
|-----------------------------------|-----------------------|
| USB Adapter Type                  | A/B                   |
| USB Version                       | 2.0                   |
| Connector & Housing Type          | Receptacle            |
| Connector System                  | Cable-to-Board        |
| Connector & Contact Terminates To | Printed Circuit Board |
| USB Connector Type                | Micro USB 2.0 Type-AB |
| Configuration Features            |                       |
| Number of Ports                   | 1                     |
| Number of Positions               | 5                     |
| Body Features                     |                       |
| Offset                            | 0 mm                  |
| Shell Plating Finish              | Matte                 |
| Shell Plating Material            | Tin over Nickel       |

USB Connectors, A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Tape & Reel, Offset, Surface Mount, Cable-to-Board, Flange, 10000



| Connector Profile                              | Micro                        |
|--|------------------------------|
| Contact Features                               |                              |
| Contact Mating Area Plating Material Thickness | .76 μm[29.52 μin]            |
| Contact Mating Area Plating Material           | Gold                         |
| Contact Current Rating (Max)                   | 1.8 A                        |
| Termination Features                           |                              |
| Termination Post & Tail Length                 | .75 mm[.03 in]               |
| Termination Method to Printed Circuit Board    | Surface Mount                |
| Mechanical Attachment                          |                              |
| Locking Feature                                | Without                      |
| PCB Mount Location                             | Тор                          |
| PCB Connector Seating                          | Offset                       |
| PCB Mount Retention Type                       | Straight Leg                 |
| Panel Mount Feature Type                       | Flange                       |
| Connector Mounting Type                        | Board Mount                  |
| Housing Features                               |                              |
| Housing Material                               | Thermoplastic                |
| Housing Color                                  | Gray                         |
| Body Orientation                               | Right Angle                  |
| Centerline (Pitch)                             | .65 mm[.025 in]              |
| Dimensions                                     |                              |
| PCB Thickness (Recommended)                    | .8 – 1. mm[.031 – .039 in]   |
| Usage Conditions                               |                              |
| Soldering Temperature (Max)                    | 260 °C[500 °F]               |
| Mating Cycles (Max)                            | 10000                        |
| Operating Temperature Range                    | -30 – 85 °C[-22 – 185 °F]    |
| Operation/Application                          |                              |
| Halogen Free                                   | No                           |
| Assembly Process Feature                       | Without Pick and Place Cover |
| Circuit Application                            | Power & Signal               |
| Industry Standards                             |                              |
| Moisture Sensitivity Level                     | 1                            |

USB Connectors, A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Tape & Reel, Offset, Surface Mount, Cable-to-Board, Flange, 10000



| Industry Standard   | USB 2.0                |
|---|------------------------|
| UL Flammability Rating                                      | UL 94V-0               |
| Packaging Features  |                        |
| Packaging Quantity  | 1000                   |
| Packaging Method  | Tape & Reel            |
| Other   |                        |
| Audio & Video Connector Comment                             | Flange cut type.       |
|   |                        |
| EU RoHS Directive 2011/65/EU                                | Compliant              |
| EU RoHS Directive 2011/65/EU<br>EU ELV Directive 2000/53/EC | Compliant<br>Compliant |
|   | ·                      |
| EU ELV Directive 2000/53/EC                                 | Compliant              |

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

USB Connectors, A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Tape & Reel, Offset, Surface Mount, Cable-to-Board, Flange, 10000





**Customers Also Bought** 

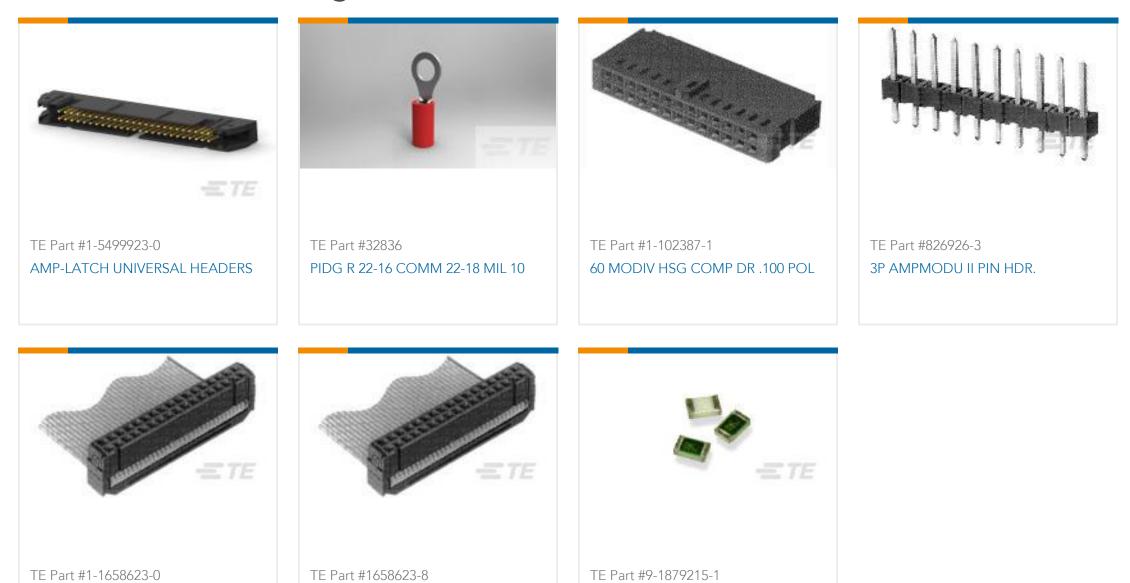

# Documents

Product Drawings MICRO USB, TYPE A/B, GRAY

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_2134536-2\_E2.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_2134536-2\_E2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2134536-2\_E2.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

**S** For support call+1 800 522 6752

08/08/2023 04:45AM | Page 4

USB Connectors, A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Tape & Reel, Offset, Surface Mount, Cable-to-Board, Flange, 10000



Datasheets & Catalog Pages

5-1773464-3\_Quick\_Reference\_Guide\_Micro\_USB\_Connectors

English

Product Specifications

Product Specification

Japanese

**Product Specification** 

English

Product Environmental Compliance MD\_2134536-2\_111320172141\_dmtec

English

MD\_2134536-2\_111320172141\_dmtec

English