



UNIVERSAL SERIAL BUS: KUSBX-SMT Series
Surface Mount USB

Product Features

- Surface Mount
- Compatible with Many Computer Peripherals
- A and B Types Available
- Supports Hot Plugging
- Contact Area with Gold Plating
- CSA/NRTL Certified File No. LR78160
- UL File No. E134345

Performance Specifications

Materials and Finish

Insulator

High Temperature Thermoplastic, UL94V-0 Rated, White or Black Color

Contacts

Phosphor Bronze

Contact Plating

Gold over Nickel on Contacts
Tin over Nickel on Termination End

Shell

Copper Alloy, Nickel Plated over Copper

Electrical Characteristics

Rated Voltage

30V AC

Rated Current

1A

Contact Resistance

30 milliohms Max.

Insulation Resistance

1000 Megohms Min.

Dielectric Withstanding Voltage

500V AC For 1 Minute

Operating Temperature

See Drawing

Generated Part Number

KUSBX-SMT-AS1N-B

Part Number Builder

KUSBX-SMT	-	AS1N	B		
Series		Type	Insulator Color	Plating Option	Packaging

Series

KUSBX-SMT - Surface Mount Universal Serial Bus

Type

- A Type
- B Type

Insulator Color Option

- B - Black
- W - White

Plating Option

- Blank - Gold Flash
- 30 - 30µ" Gold Plating

Packaging


- Blank - Bulk
- TR - Tape and Reel

Contact Kycon for more options

KUSBX-SMT

Dimensions in mm

KUSBX-SMT-AS1N

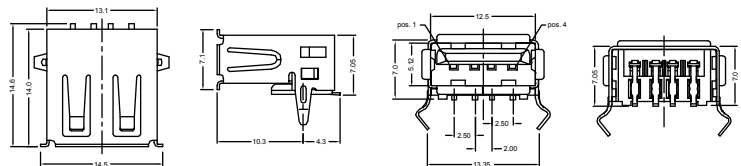

KUSBX-SMT-BS1N

