


REVISIONS					
REV	DATE	BY	CHK	APPV	DESCRIPTION
G2	27SEP2022	REK	MF		REVISED PER ECN-22-176629

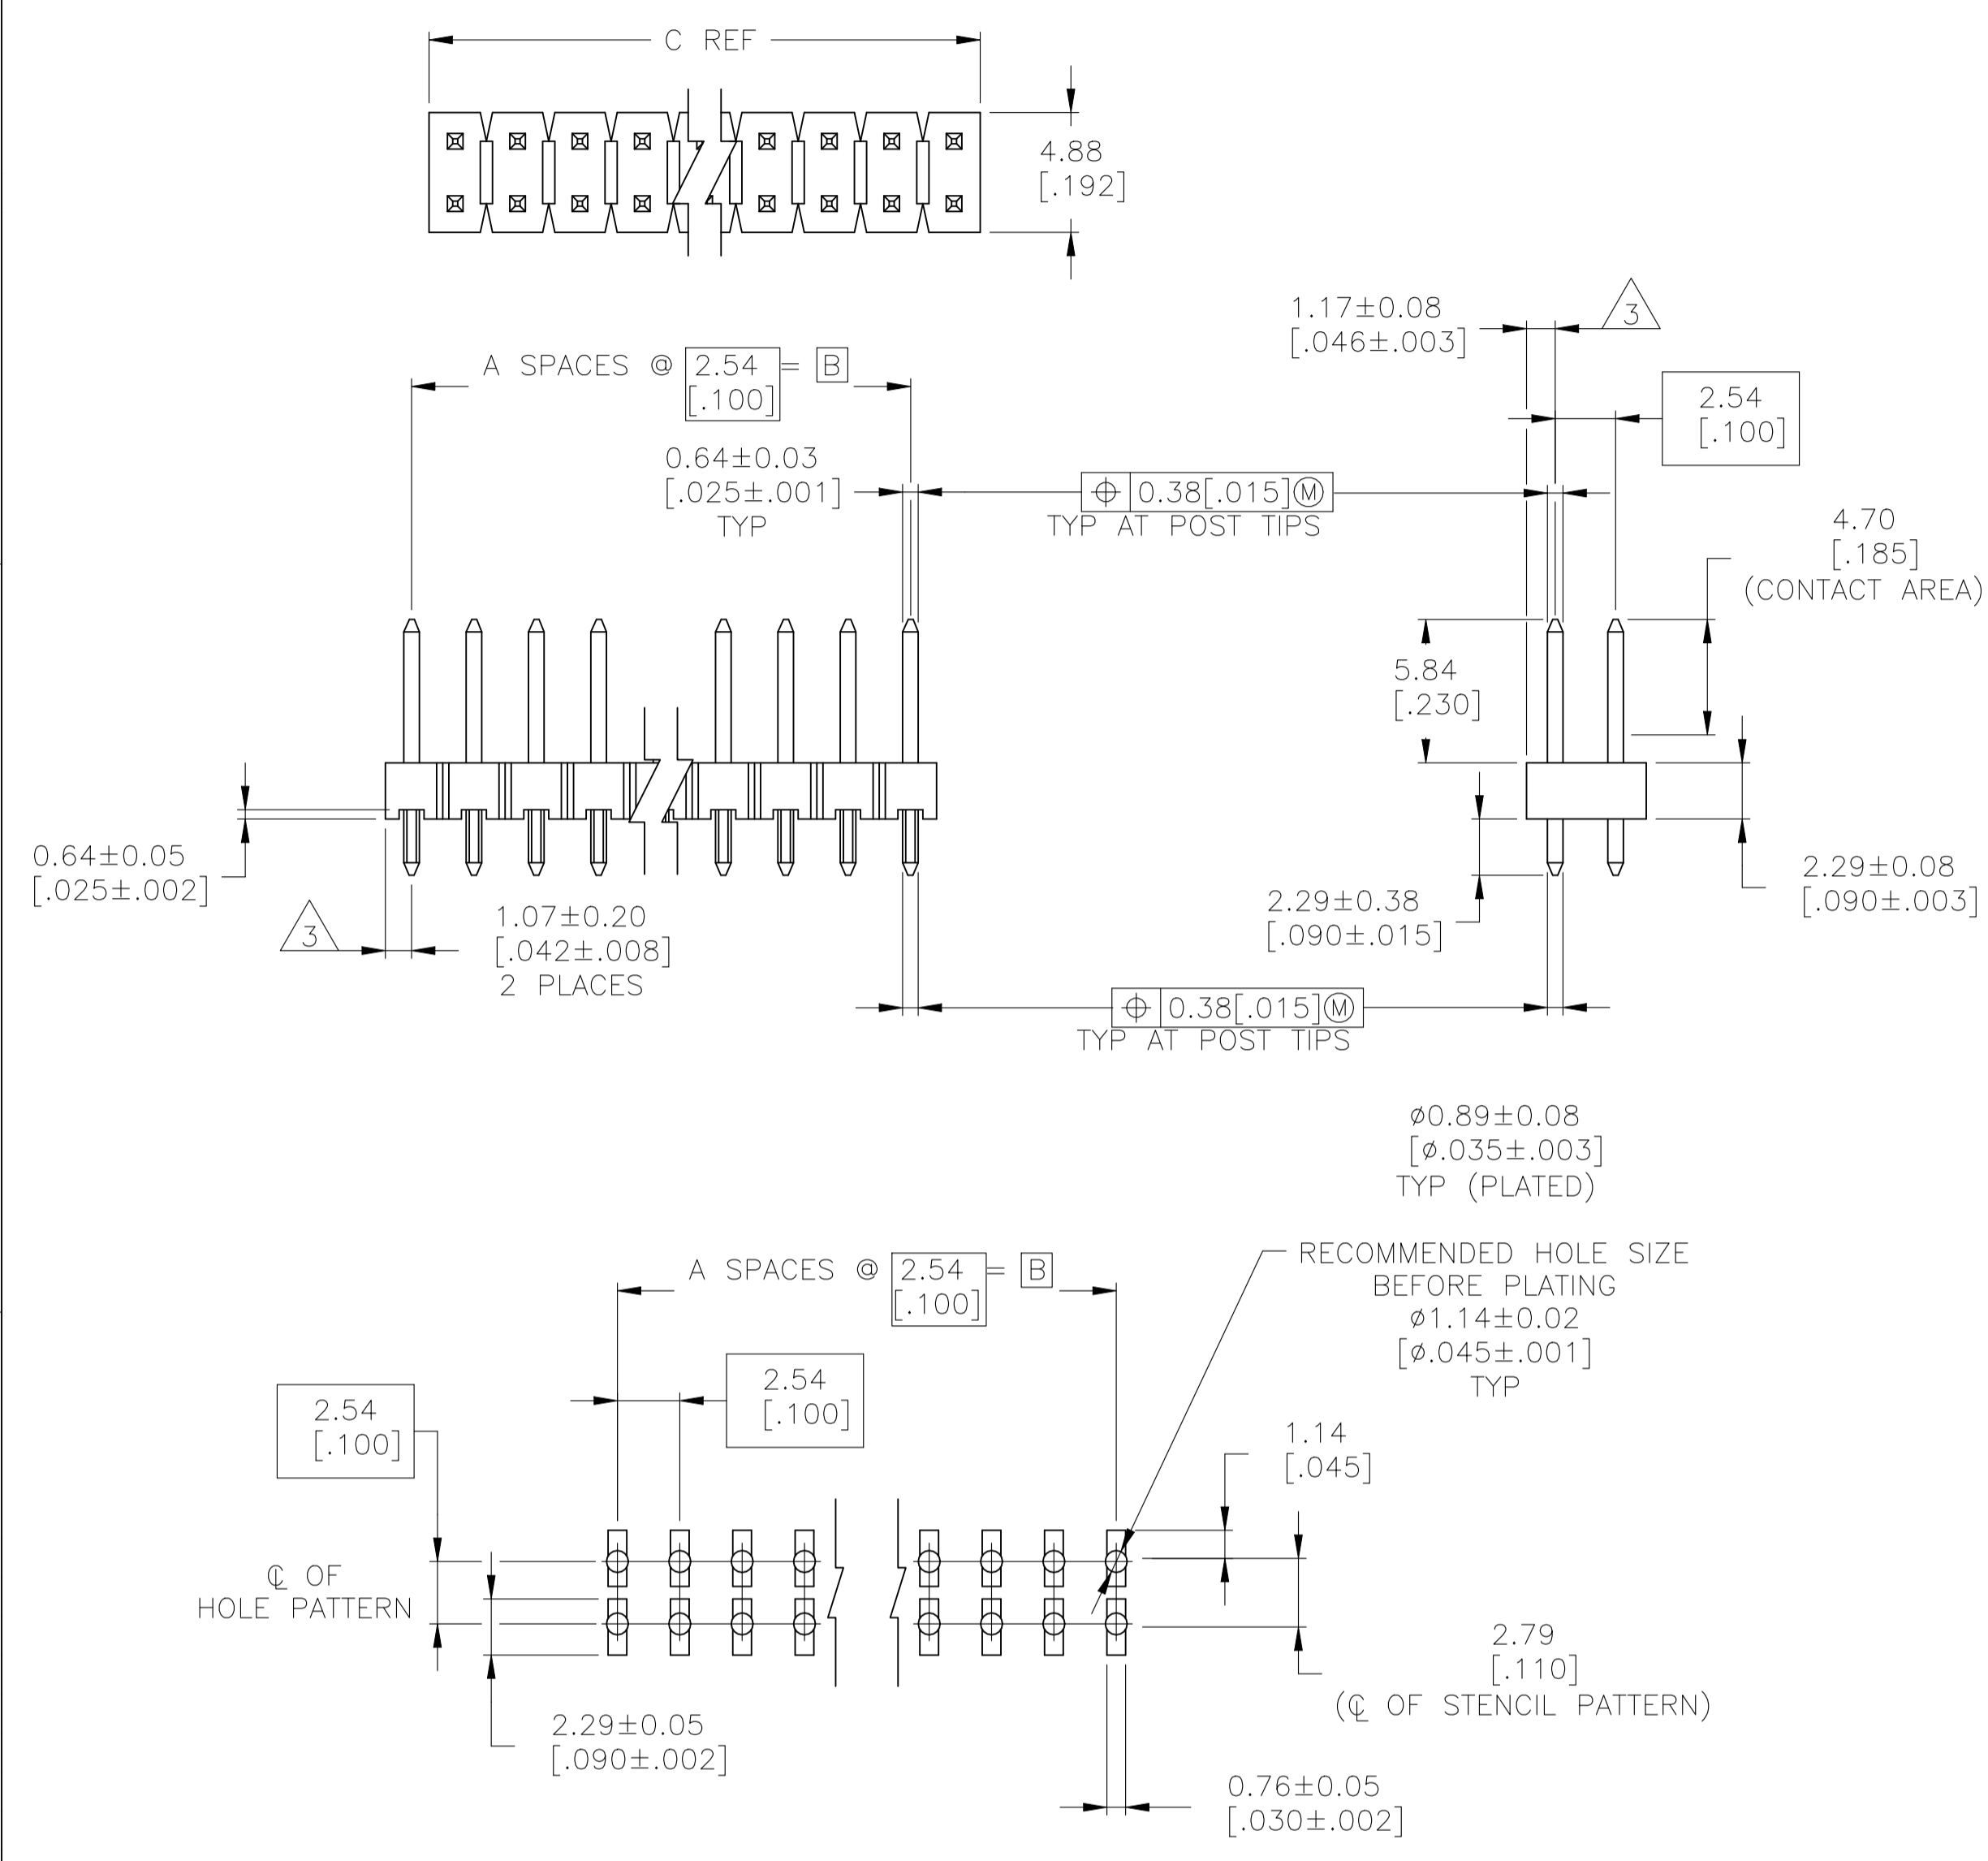

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063[1.60] THICK PC BOARD AND .012[.305] STENCIL THICK

- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- PLATING: 0.000127 [0.000005] GOLD ON CONTACT AREA, .00254-0.00508 [0.000100-.0000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [0.000050] NICKEL.
- HOUSING: LCP, COLOR-BLACK. POST: COPPER ALLOY.
- PLATING: 0.000127 [0.000005] GOLD ON CONTACT AREA, .00254-0.00508 [0.000100-.0000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [0.000050] NICKEL.
- OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

101.19 [3.984]	99.06 [3.900]	39	80	9-146259-0
98.65 [3.884]	96.52 [3.800]	38	78	8-146259-9
96.11 [3.784]	93.98 [3.700]	37	76	8-146259-8
93.57 [3.684]	91.44 [3.600]	36	74	8-146259-7
91.03 [3.584]	88.90 [3.500]	35	72	8-146259-6
88.49 [3.484]	86.36 [3.400]	34	70	8-146259-5
85.95 [3.384]	83.82 [3.300]	33	68	8-146259-4
83.41 [3.284]	81.28 [3.200]	32	66	8-146259-3
80.87 [3.184]	78.74 [3.100]	31	64	8-146259-2
78.33 [3.084]	76.20 [3.000]	30	62	8-146259-1
75.79 [2.984]	73.66 [2.900]	29	60	8-146259-0
73.25 [2.884]	71.12 [2.800]	28	58	7-146259-9
70.71 [2.784]	68.58 [2.700]	27	56	7-146259-8
68.17 [2.684]	66.04 [2.600]	26	54	7-146259-7
65.63 [2.584]	63.5 [2.500]	25	52	7-146259-6
63.09 [2.484]	60.96 [2.400]	24	50	7-146259-5
60.55 [2.384]	58.42 [2.300]	23	48	7-146259-4
58.01 [2.284]	55.88 [2.200]	22	46	7-146259-3
55.47 [2.184]	53.34 [2.100]	21	44	7-146259-2
52.93 [2.084]	50.80 [2.000]	20	42	7-146259-1
50.39 [1.984]	48.26 [1.900]	19	40	7-146259-0
47.85 [1.884]	45.72 [1.800]	18	38	6-146259-9
45.31 [1.784]	43.18 [1.700]	17	36	6-146259-8
42.77 [1.684]	40.64 [1.600]	16	34	6-146259-7
40.23 [1.584]	38.10 [1.500]	15	32	6-146259-6
37.69 [1.484]	35.56 [1.400]	14	30	6-146259-5
35.15 [1.384]	33.02 [1.300]	13	28	6-146259-4
32.61 [1.284]	30.48 [1.200]	12	26	6-146259-3
30.07 [1.184]	27.94 [1.100]	11	24	6-146259-2
27.53 [1.084]	25.40 [1.000]	10	22	6-146259-1
24.99 [0.984]	22.86 [0.900]	9	20	6-146259-0
22.45 [0.884]	20.32 [0.800]	8	18	5-146259-9
19.91 [0.784]	17.78 [0.700]	7	16	5-146259-8
17.37 [0.684]	15.24 [0.600]	6	14	5-146259-7
14.83 [0.584]	12.70 [0.500]	5	12	5-146259-6
12.29 [0.484]	10.16 [0.400]	4	10	5-146259-5
9.75 [0.384]	7.62 [0.300]	3	8	5-146259-4
7.21 [0.284]	5.08 [0.200]	2	6	5-146259-3
4.67 [0.184]	2.54 [0.100]	1	4	5-146259-2
2.13 [0.084]	- [-]	0	2	5-146259-1
101.19 [3.984]	99.06 [3.900]	39	80	4-146259-0

OBsolete

7  
OBsolete

7  
SUPERCEDED

7  
OBsolete

7  
SUPERCEDED

7  
OBsolete

7  
SUPERCEDED

7  
OBsolete

7  
SUPERCEDED

7  
OBsolete

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
	98.65 [3.884]	96.52 [3.800]	38	78	3-146259-9
	96.11 [3.784]	93.98 [3.700]	37	76	3-146259-8
	93.57 [3.684]	91.44 [3.600]	36	74	3-146259-7
	91.03 [3.584]	88.90 [3.500]	35	72	3-146259-6
	88.49 [3.484]	86.36 [3.400]	34	70	3-146259-5
	85.95 [3.384]	83.82 [3.300]	33	68	3-146259-4
	83.41 [3.284]	81.28 [3.200]	32	66	3-146259-3
	80.87 [3.184]	78.74 [3.100]	31	64	3-146259-2
	78.33 [3.084]	76.20 [3.000]	30	62	3-146259-1
	75.79 [2.984]	73.66 [2.900]	29	60	3-146259-0
	73.25 [2.884]	71.12 [2.800]	28	58	2-146259-9
	70.71 [2.784]	68.58 [2.700]	27	56	2-146259-8
	68.17 [2.684]	66.04 [2.600]	26	54	2-146259-7
	65.63 [2.584]	63.5 [2.500]	25	52	2-146259-6
	63.09 [2.484]	60.96 [2.400]	24	50	2-146259-5
	60.55 [2.384]	58.42 [2.300]	23	48	2-146259-4
	58.01 [2.284]	55.88 [2.200]	22	46	2-146259-3
	55.47 [2.184]	53.34 [2.100]	21	44	2-146259-2
	52.93 [2.084]	50.80 [2.000]	20	42	2-146259-1
	50.39 [1.984]	48.26 [1.900]	19	40	2-146259-0
	47.85 [1.884]	45.72 [1.800]	18	38	1-146259-9
	45.31 [1.784]	43.18 [1.700]	17	36	1-146259-8
	42.77 [1.684]	40.64 [1.600]	16	34	1-146259-7
	40.23 [1.584]	38.10 [1.500]	15	32	1-146259-6
	37.69 [1.484]	35.56 [1.400]	14	30	1-146259-5
	35.15 [1.384]	33.02 [1.300]	13	28	1-146259-4
	32.61 [1.284]	30.48 [1.200]	12	26	1-146259-3
	30.07 [1.184]	27.94 [1.100]	11	24	1-146259-2
	27.53 [1.084]	25.40 [1.000]	10	22	1-146259-1
	24.99 [0.984]	22.86 [0.900]	9	20	1-146259-0
	22.45 [0.884]	20.32 [0.800]	8	18	1-146259-9
	19.91 [0.784]	17.78 [0.700]	7	16	1-146259-8
	17.37 [0.684]	15.24 [0.600]	6	14	1-146259-7
	14.83 [0.584]	12.70 [0.500]	5	12	1-146259-6
	12.29 [0.484]	10.16 [0.400]	4	10	1-146259-5
	9.75 [0.384]	7.62 [0.300]	3	8	1-146259-4
	7.21 [0.284]	5.08 [0.200]	2	6	1-146259-3
	4.67 [0.184]	2.54 [0.100]	1	4	1-146259-2
	2.13 [0.084]	- [-]	0	2	1-146259-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN T. HOFFMAN 5/8/95  
CHK G. DUBNICZKI 10/24/95  
APPV G. DUBNICZKI 10/24/95

TE Connectivity

HEADER ASSEMBLY, MODI, BREAKAWAY, DOUBLE ROW, VERTICAL, HIGH TEMPERATURE

SIZE: A1  
CAGE CODE: 00779  
DRAWING NO: 146259

SCALE: 4:1  
SHEET: 1 of 1  
REV: G2