


## SPECIFICATION CONTROL DRAWING

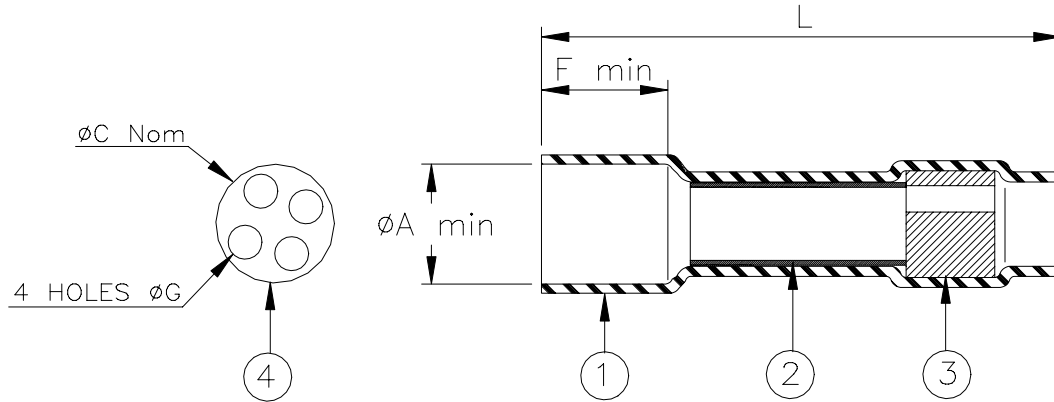

Product Revision		Product Dimensions				
Product Name		L max	$\phi A$ min	$\phi C$ nom	$\phi G$ min	F min
D-436-40	A	63.2 (2.490)	12.0 (0.475)	11.8 (0.465)	3.95 (0.155)	16.5 (0.650)


### MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. MELTABLE LINER: Modified thermoplastic.
3. INTEGRAL MULTI-WIRE SEAL: Low outgassing immersion resistant thermoplastic. Color: yellow.
4. SEPARATE MULTI-WIRE SEAL: Low outgassing immersion resistant thermoplastic. Color: yellow.

### APPLICATION

1. This part is designed to provide an immersion resistant seal on in-line splices made with wires having insulations rated for at least 135°C.
2. Part will seal assemblies which require insertion of no more than two wires per hole of the multi-hole inserts.
3. For assembly instruction, see Raychem Installation Procedure RPIP-826-00.

For best results, prepare the cable as shown:



\* A trademark of Raychem Corporation.

<b>Raychem</b>		THERMOFIT DEVICES		Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		TITLE: <b>MULTI-CONDUCTOR SEALING SLEEVE, LOW OUTGASSING</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>D-436-40</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D981041	
REPLACES: D43640		DRAWN BY: M. FORONDA		DATE: 06/23/98		PROD. REV. SEE TABLE	
DOC ISSUE: 1		SCALE: None		SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision