


REVISION									
REV	DESCRIPTION	DATE	APPROVED						
A	INITIAL RELEASE	06/04/02	BS						
В	REVISED OVERALL LENGHT	08/01/02	BS						
С	ADD ALTERNATIVE cUL LOGO, RFS.3022, DMR	02/09/04	BS						
D	ADD CH. ROHS, UPDATE DRW, RFS.14187, JS	07/23/08	BS						

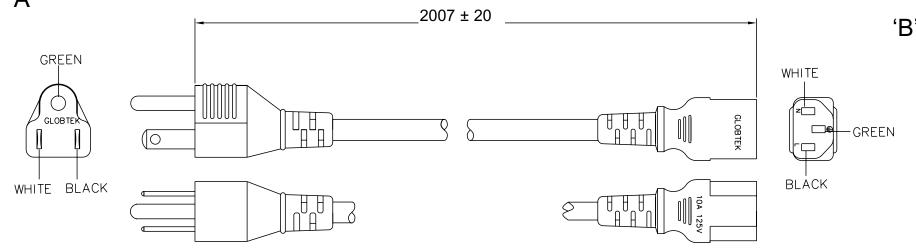

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC

CABLE TYPE / SIZE: SJT, 18 AWG X 3 , VW-1

TEMPERATURE RATING: 60° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): 2007± 20 mm (6 Ft, 7 INCH)

CABLE OUTER DIAMETER: $7.8 \pm 0.2 \text{ mm}$ END 'A' TERMINATION: NEMA 5-15P END 'B' TERMINATION: IEC 320 / C13 APPROVALS PLUG: UL, CSA or cUL APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:

HANKING

L1 = 0

 $L2 = 200 \pm 10 \text{ mm}$

L3 = 0



NOTES:

Contents of this document

prior notice

are subject to change without

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).








Foot Note:

Globtek Inc. will not be liable for the

Limitation
Globtek pro

safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction. Limitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.



DASH NO.	1	PART NO	REV.			NOTES					
TABULATION BLOCK											
			DEC .xx	DLERA CIMALS +/- 0.1 +/005	NCES: ANGULAR +/- 1*	_	lobTek [®] , Inc. ww.globtek.com	186 Veterans Dr. No Tel. 201-784-1000	rthvale, NJ 07647 Fax 201.784.0111		
INIT.BY:		DATE: 06/02/02	.xx +	METERS +/- 0.3 +/013	ANGULAR +/- 1°	DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET					
DRAWN:	INF	DATE: 06/04/02	FSCN G, CC	No.:	SIZE A	MODEL:	N / A		REV. D		
APRVD:	DO	DATE: 06/04/02	SCA	SCALE: NONE		PART NO:	3021066F7701(R)		SHEET 1/1		