


# IE5312



## Inductive sensor

IEK3002BBPKG/US-104

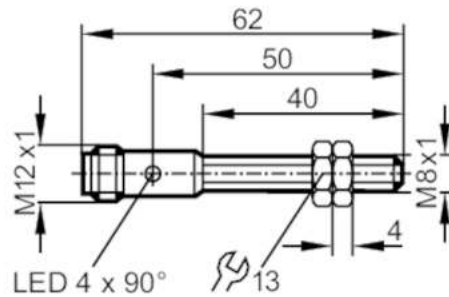

Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	2
Housing	threaded type
Dimensions [mm]	M8 x 1 / L = 62
Electrical data	
Operating voltage [V]	10...36 DC; (; to PELV)
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes
Detection zone	
Sensing range [mm]	2
Operating distance [mm]	0...1.6
Accuracy / deviations	
Correction factor	stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...20
Switch point drift [% of Sr]	-10...10
Operating conditions	
Ambient temperature [°C]	-25...70

# IE5312



## Inductive sensor

IEK3002BBPKG/US-104

Protection	IP 67
------------	-------

### Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	1379	

### Mechanical data

Weight [g]	23.1
Housing	threaded type
Mounting	flush mountable
Dimensions [mm]	M8 x 1 / L = 62
Thread designation	M8 x 1
Materials	housing: brass white bronze coated; sensing face: LCP

### Displays / operating elements

Display	switching status	4 x 90° LED, yellow
---------	------------------	---------------------

### Accessories

Items supplied	lock nuts: 2
----------------	--------------

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection - plug

Connector: 1 x M12; coding: A



### Connection

