

MOLLY-S

~25° spot beam

SPECIFICATION:

Dimensions	Ø 69.8 mm
Height	24.8 mm
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
MOLLY-S	Single lens	PMMA	clear	







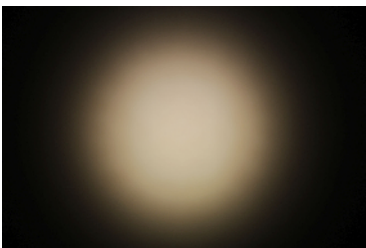
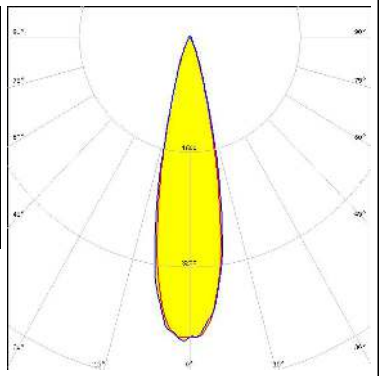




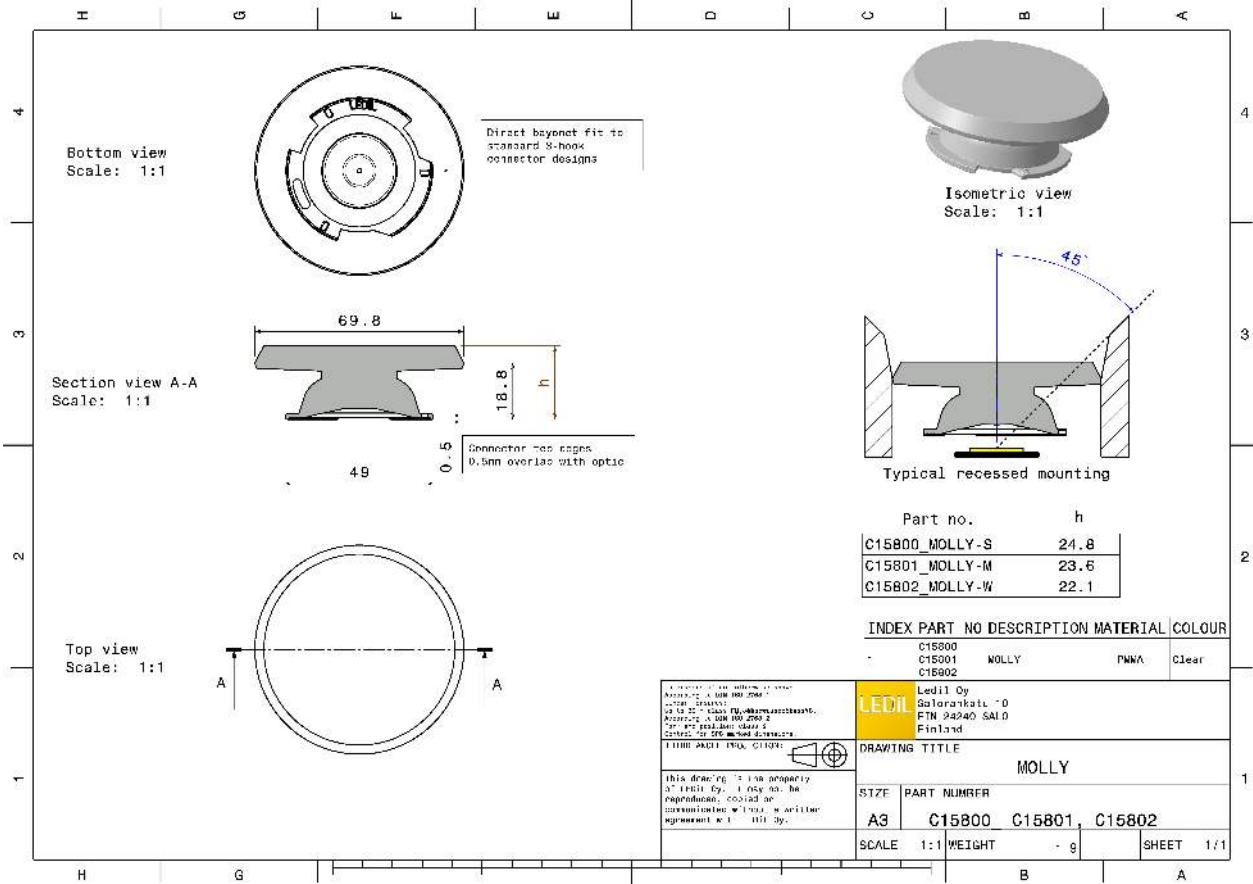
ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C15800_MOLLY-S » Box size: 480 x 280 x 300 mm	198	36	18	9.7



See also our general installation guide: www.ledil.com/installation_guide


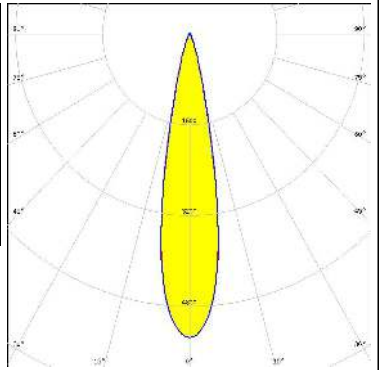
OPTICAL RESULTS (MEASURED):
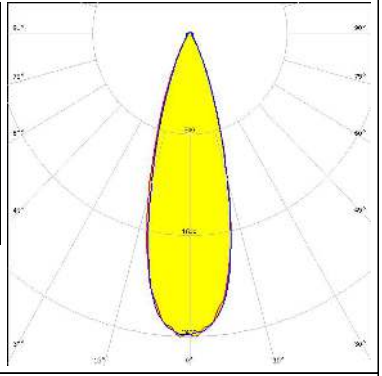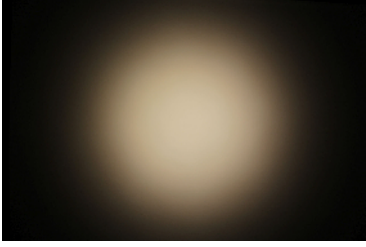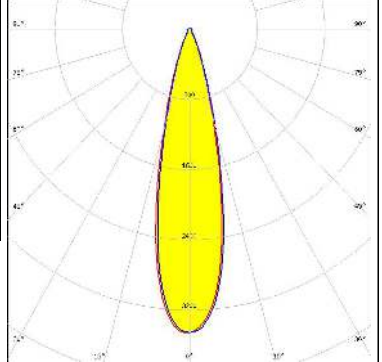
<p></p> <p>LED V11 HD Gen 8 FWHM / FWTM 21.0° / 36.0° Efficiency 91 % Peak intensity 5.4 cd/m LEDs/each optic 1 Light colour White Required components: Bender Wirth: 633d 3Hook</p>		
<p></p> <p>LED Vero SE 13 FWHM / FWTM 23.0° / 40.0° Efficiency 90 % Peak intensity 4.2 cd/m LEDs/each optic 1 Light colour White Required components: C16402_CLAMP-VEROSE-13-18</p>		
<p></p> <p>LED Vero SE 18 FWHM / FWTM 31.0° / 54.0° Efficiency 88 % Peak intensity 2.4 cd/m LEDs/each optic 1 Light colour White Required components: C16402_CLAMP-VEROSE-13-18</p>		
<p>CITIZEN</p> <p>LED CLL03x/CLU03x FWHM / FWTM 24.0° / 45.0° Efficiency 88 % Peak intensity 3.5 cd/m LEDs/each optic 1 Light colour White Required components: C16791_CLAMP-Z45-A TE Connectivity: 2325807-3</p>		

OPTICAL RESULTS (MEASURED):



CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 23.0° / 42.0°
 Efficiency 87 %
 Peak intensity 3.9 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 433 Typ L1

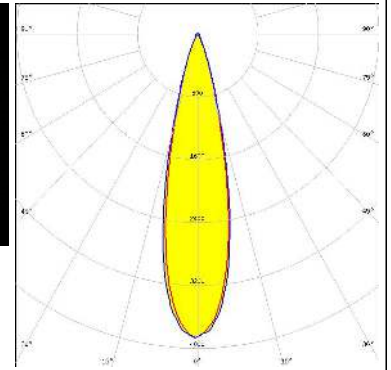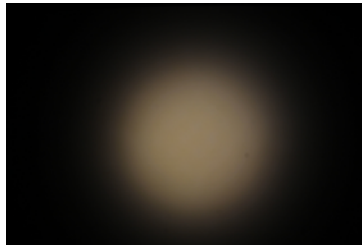



CREE LED

LED CMA1840
 FWHM / FWTM 26.0° / 44.0°
 Efficiency 91 %
 Peak intensity 3.5 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14123_CLAMP-CXA15-18

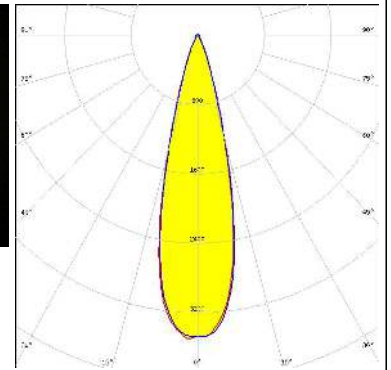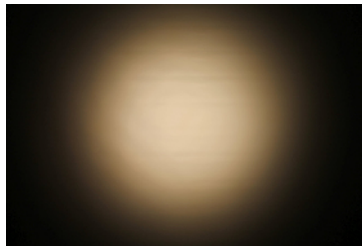



CREE LED

LED CMA2550
 FWHM / FWTM 32.0° / 56.0°
 Efficiency 89 %
 Peak intensity 2.2 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14036_CLAMP_CXA25-30

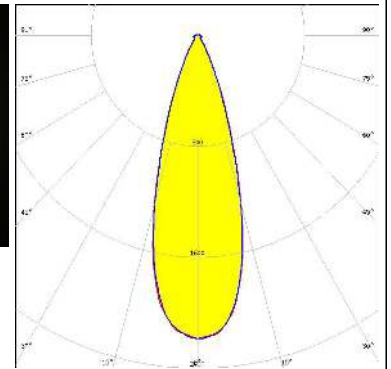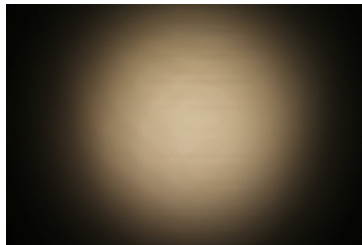

CREE LED


LED CMA3090
 FWHM / FWTM 37.0° / 64.0°
 Efficiency 86 %
 Peak intensity 1.6 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14036_CLAMP_CXA25-30

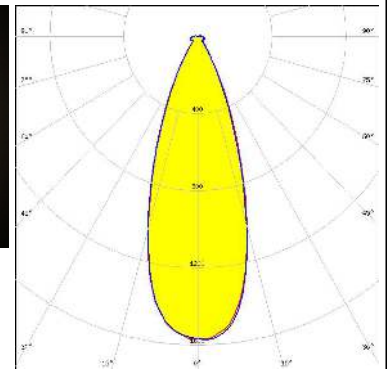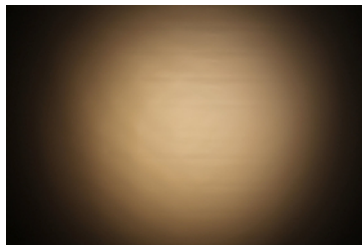

OPTICAL RESULTS (MEASURED):


CREE LED

LED CMT14xx
 FWHM / FWTM 19.0° / 32.0°
 Efficiency 90 %
 Peak intensity 6.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 434 Typ L1

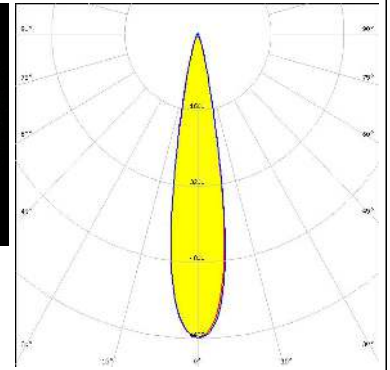



CREE LED

LED CMT19xx
 FWHM / FWTM 26.0° / 44.0°
 Efficiency 90 %
 Peak intensity 3.5 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 477 Typ L1

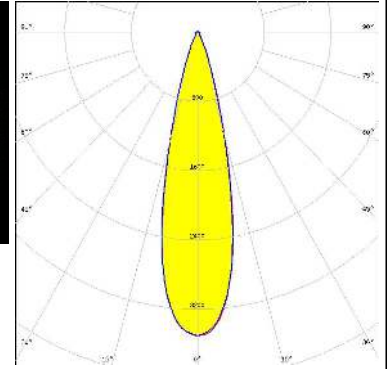


CREE LED

LED CMT28xx
 FWHM / FWTM 35.0° / 61.0°
 Efficiency 85 %
 Peak intensity 1.7 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C13584_CLAMP-VERO29
 Bender Wirth: 471 Typ L3

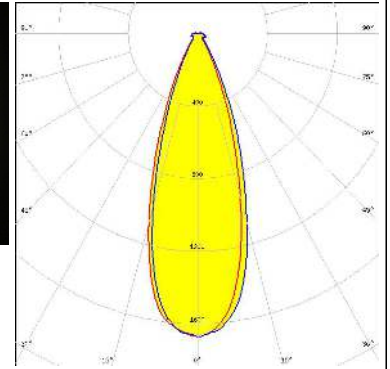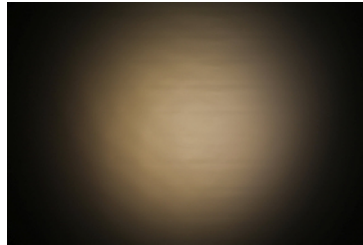
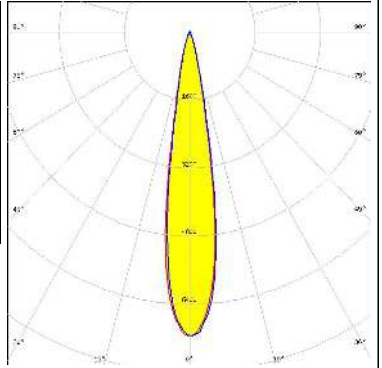

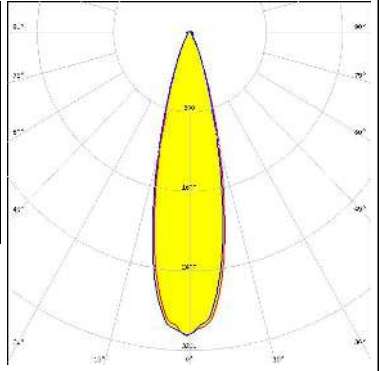
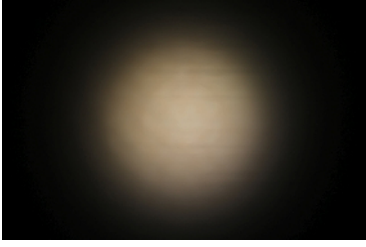

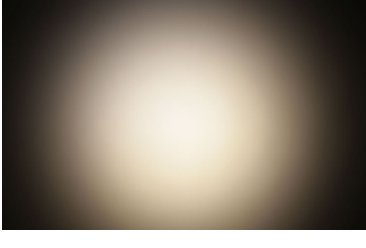
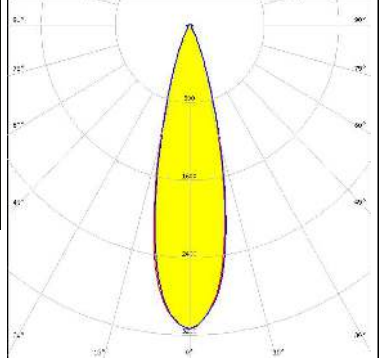


CREE LED

LED CXA/B 15xx
 FWHM / FWTM 17.0° / 30.0°
 Efficiency 91 %
 Peak intensity 7.6 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C14123_CLAMP-CXA15-18

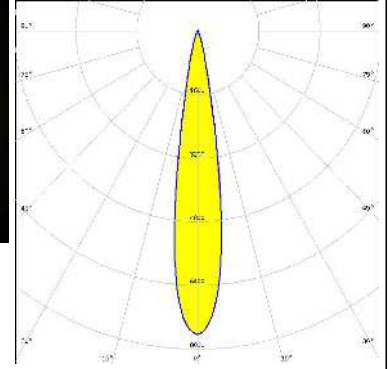

OPTICAL RESULTS (MEASURED):

<p>LUMILEDS</p> <p>LED LUXEON CoB 1204HD</p> <p>FWHM / FWTM 18.0° / 31.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 7.1 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: TE Connectivity: 2213382-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>OSRAM</p> <p>LED PrevaLED Core G7 L15 H1</p> <p>FWHM / FWTM 26.0° / 48.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 3.1 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16685_CLAMP-PRV-A</p>		
<p>PHILIPS</p> <p>LED Fortimo SLM L13 CoB</p> <p>FWHM / FWTM 24.0° / 42.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 3.9 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: TE Connectivity: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1</p>		
<p>PHILIPS</p> <p>LED Fortimo SLM L15 + SLM holder</p> <p>FWHM / FWTM 26.0° / 47.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 3.1 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: TE Connectivity: OPTIC CLIP Z50 TYPE1 2213194-1</p>		



OPTICAL RESULTS (MEASURED):

PHILIPS

LED Fortimo SLM L15 CoB
FWHM / FWTM 27.0° / 47.0°
Efficiency 88 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

TE Connectivity: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

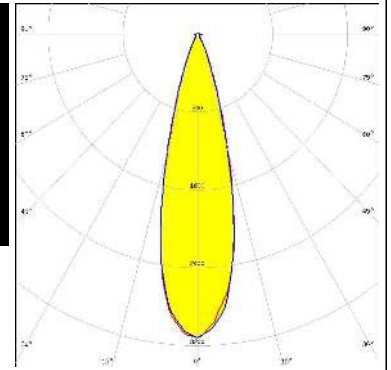
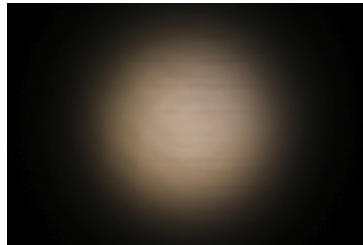


XICATO





LED XTM - 19mm LES
FWHM / FWTM 28.0° / 52.0°
Efficiency 89 %
Peak intensity 2.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C16491_XTM-ADAPTER-50-A

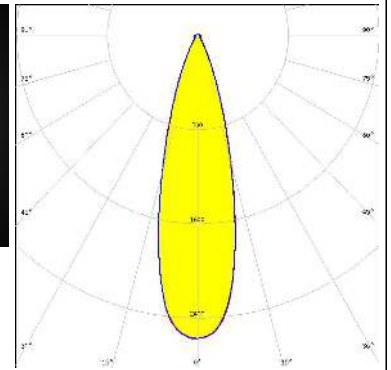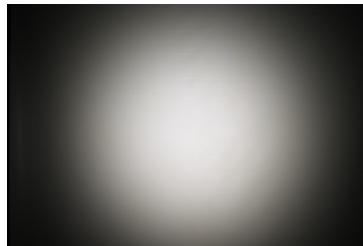


OPTICAL RESULTS (SIMULATED):
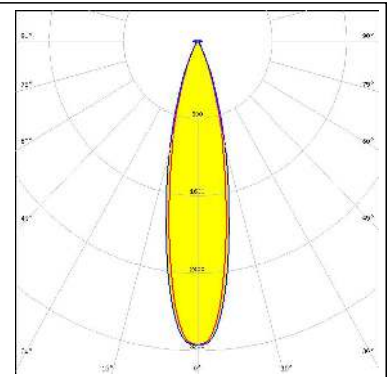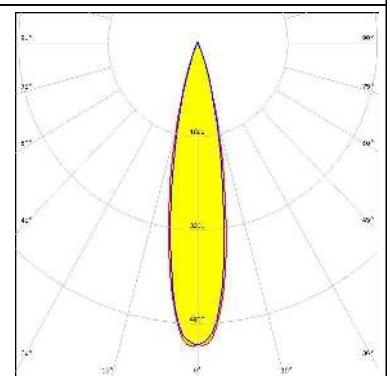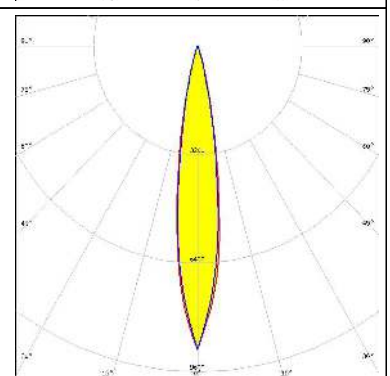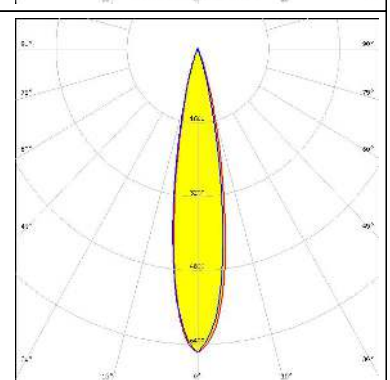
<p>bridgelux.</p> <p>LED: V9 HD Gen7 FWHM / FWTM: 16.0° / 26.0° Efficiency: 91 % Peak intensity: 10.8 cd/lm LEDs/each optic: 1 Light colour: White</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 496 Typ L1</p>	
<p>bridgelux.</p> <p>LED: VERO13 FWHM / FWTM: 21.0° / 39.0° Efficiency: 90 % Peak intensity: 5.2 cd/lm LEDs/each optic: 1 Light colour: White</p> <p>Required components: C13658_CLAMP-VERO13-18</p>	
<p>CITIZEN</p> <p>LED: CLL02x/CLU02x (LES10) FWHM / FWTM: 16.0° / 30.0° Efficiency: 87 % Peak intensity: 8.8 cd/lm LEDs/each optic: 1 Light colour: White</p> <p>Required components: C13658_CLAMP-VERO13-18 Bender Wirth: 434 Typ L1</p>	
<p>CREE LED</p> <p>LED: CXA/B 1816 & CXA/B 1820 & CXA 1850 FWHM / FWTM: 19.0° / 34.0° Efficiency: 89 % Peak intensity: 6.5 cd/lm LEDs/each optic: 1 Light colour: White</p> <p>Required components: C14123_CLAMP-CXA15-18</p>	


OPTICAL RESULTS (SIMULATED):




LED CXA/B 25xx
 FWHM / FWTM 25.0° / 47.0°
 Efficiency 85 %
 Peak intensity 3.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C14036_CLAMP_CXA25-30

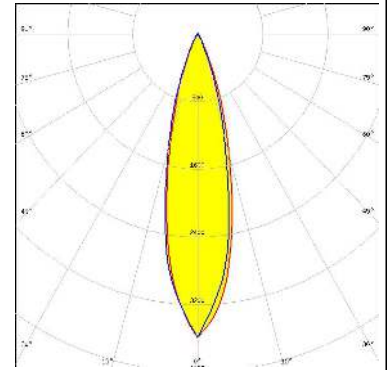


LED LUXEON CoB 1205HD
 FWHM / FWTM 19.0° / 33.0°
 Efficiency 86 %
 Peak intensity 6.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18
 Bender Wirth: 480 Typ L1

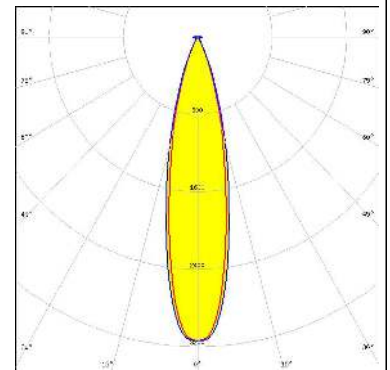

LED LUXEON CoB 1208
 FWHM / FWTM 24.0° / 44.0°
 Efficiency 87 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 632a 3Hook

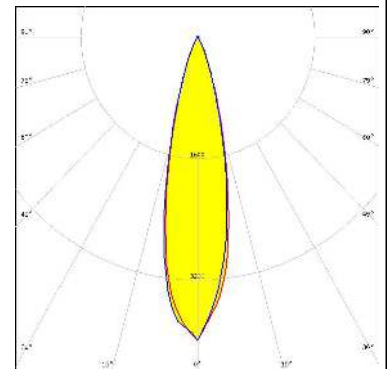

LED CTM-18 (Tunable White)
 FWHM / FWTM 23.0° / 47.0°
 Efficiency 78 %
 Peak intensity 3.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C13658_CLAMP-VERO13-18

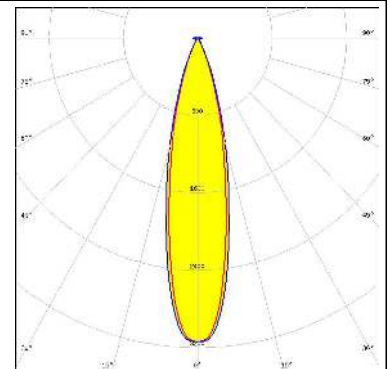

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)