

COIL: 12.0 VDC	
WINDING #1	WINDING #2
254 OHMS ± 10% @ 25° C	254 OHMS ± 10% @ 25° C
6.5 VDC MUST OPERATE	6.5 VDC MUST OPERATE
12.0 VDC NOMINAL VOLTAGE	12.0 VDC NOMINAL VOLTAGE

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET & RESET TIME 5 MS MAX.

BOUNCE 2 MS MAX.


CUST. C. I. I. STD.

CUST. NO. \_\_\_\_\_

TYPE "LS" RELAY

**CUSTOMER DATA SHEET**

CONTACTS WILL SWITCH WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN

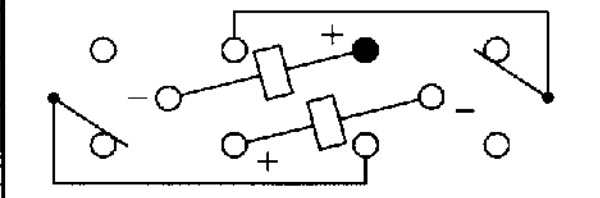

CONTACT RATING: 2 AMPS 28 VDC

RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/20/98 CK. VZ

**COMMUNICATIONS INSTRUMENTS, INC.**

**LSAW-2C-12B**