

COIL: @ +25° c

RESISTANCE 150 Ω ±10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.7 VDC

MUST RELEASE 0.75 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS AT 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

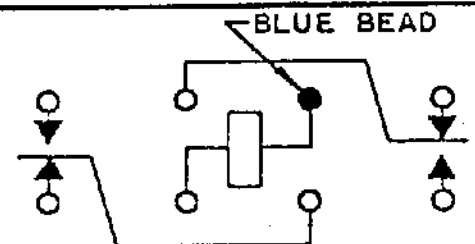

CONTACT RATING: Low level to 4A @ 28 VDC 100,000 Operation

DR. 1-18-89

CK. JMB



Communications  
Instruments, Inc.

CUST. Similar to H: G

CUST. NO. 2HA-2A-11Z

TYPE HFW RELAY

HFW4A1201S03