





ESD Mailer

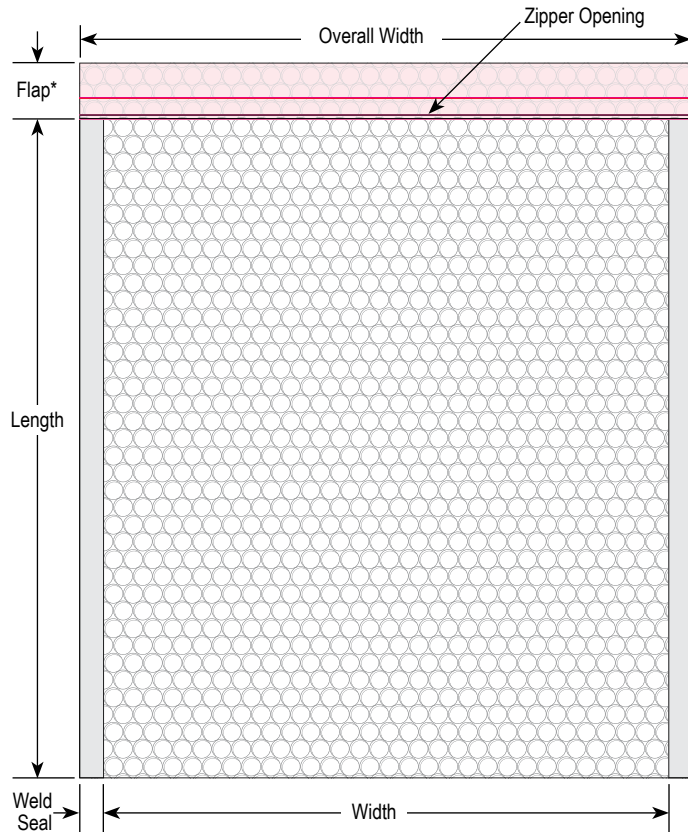

*Note: Flap made from pink dissipative polycarbonate

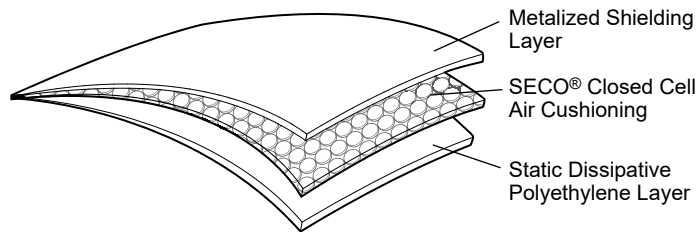

Specifications:

Electrical Properties

Surface Resistance:

Outer Layer

Inner Layer

Static Decay

Corrosivity -

Inner Layer

Physical Properties

Thickness:

Outer Layer

Inner Layer

Bubble properties

Diameter

Height

Tensile strength -

Outer Layer

Inner Layer

Burst Strength -

Outer Layer

Inner Layer

Puncture Strength -

Outer Layer

Polycarbonate Haze -

Inner Layer

Typical Values

1×10^4 to $< 1 \times 10^{11}$ ohms

1×10^4 to $< 1 \times 10^{11}$ ohms

<0.03 seconds

NE

0.0031", 0.079 mm

0.002", 0.051 mm

3/8", 9.5 mm

3/16", 4.7 mm

6500 psi

1500 psi

70 psi

20 psi

> 10 lbs

NE

Test Procedures/Method

ANSI/ESD STM11.11

ANSI/ESD STM11.11

FTMS 101C Method 4046.1

FTMS 101C, Method 3005

N/A

N/A

ASTM D882

ASTM D882

FTMS 191C, Method 6122

FTMS 191C, Method 6122

FTMS 101C, Method 2065

72 Hr. Contact

Item	Size (W x L)
13970	4" x 6", 10 Pack
13971	6" x 8", 10 Pack
13972	8" x 10", 10 Pack
13973	10" x 12", 10 Pack

RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern are intentionally added in manufacturing this product. Ref: Directive EU 2015/863, amending Annex II to Directive 2011/65/EU and (EC) No 1907/2006.

See Desco [Limited Warranty at Desco.com](#).



Made in the
United States of America

Specifications and procedures subject to change without notice.

ESD Mailer

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370

DRAWING NUMBER
13970

DATE:
January
2021

DESCO