

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, Push-in connection, number of positions: 2+PE, 0.5 mm² ... 2.5 mm², 500 V, 20 A, black, assembly thread: M20, Push-in connection

Your advantages

- Convenient: quick and easy assembly without special tools

Commercial data

Item number	1088682
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF51
Product key	BF6LAA
GTIN	4055626890982
Weight per piece (including packing)	31.3 g
Weight per piece (excluding packing)	31.3 g
Customs tariff number	85366990
Country of origin	CN

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

Technical data

Product properties

Product type	Panel feed-through
Product family	IPD
Number of positions	3
Connection profile	2+PE
Position marking	L, N, PE
Number of connections per position	1
Series	IPD

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	Push-in connection
Connection system, internal	Push-in connection
Frequency of connections between conductors of the same cross section	10

Conductor connection

Conductor cross section flexibel	0.5 mm ² ... 2.5 mm ²
Conductor cross section solid	0.5 mm ² ... 2.5 mm ²
Connection cross section AWG	20 ... 14

Electrical properties

Rated surge voltage (III/3)	6 kV
Rated current	20 A
Rated voltage (III/3)	500 V
Nominal voltage U _N	500 V AC
	500 V DC
Nominal current I _N	20 A

Material specifications

Material	PA
Contact material	Cu
Contact surface material	Ni/Ag/Sn

Cable/line

Position marking	L, N, PE
------------------	----------

Mounting

Mounting type	M20
---------------	-----

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

Connection method	Push-in connection
-------------------	--------------------


Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K
Ambient temperature (operation)	-30 °C ... 100 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-30 °C ... 100 °C


Drawings

Diagram

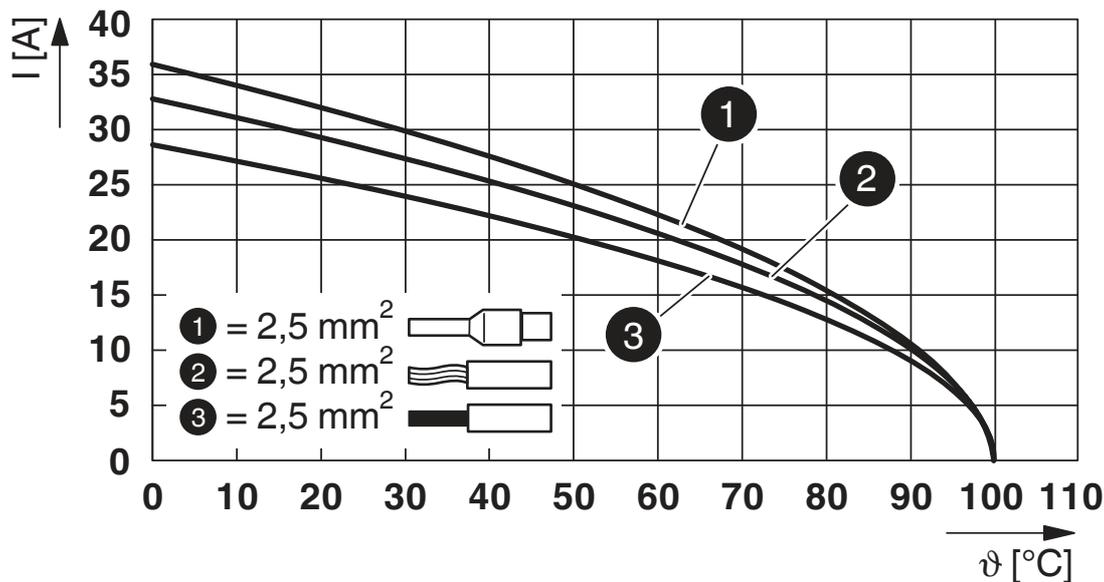

Derating diagram for 2.5 mm²

Diagram

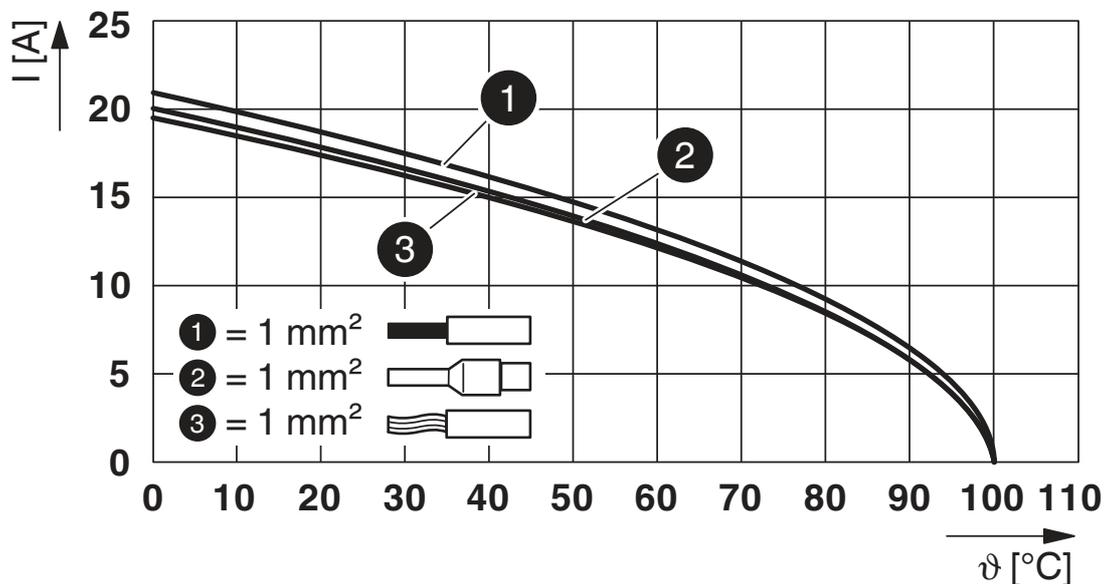


Derating diagram for 1.0 mm²

IPD W 3P2,5 F M20 BK - Panel feed-through

1088682

<https://www.phoenixcontact.com/us/products/1088682>

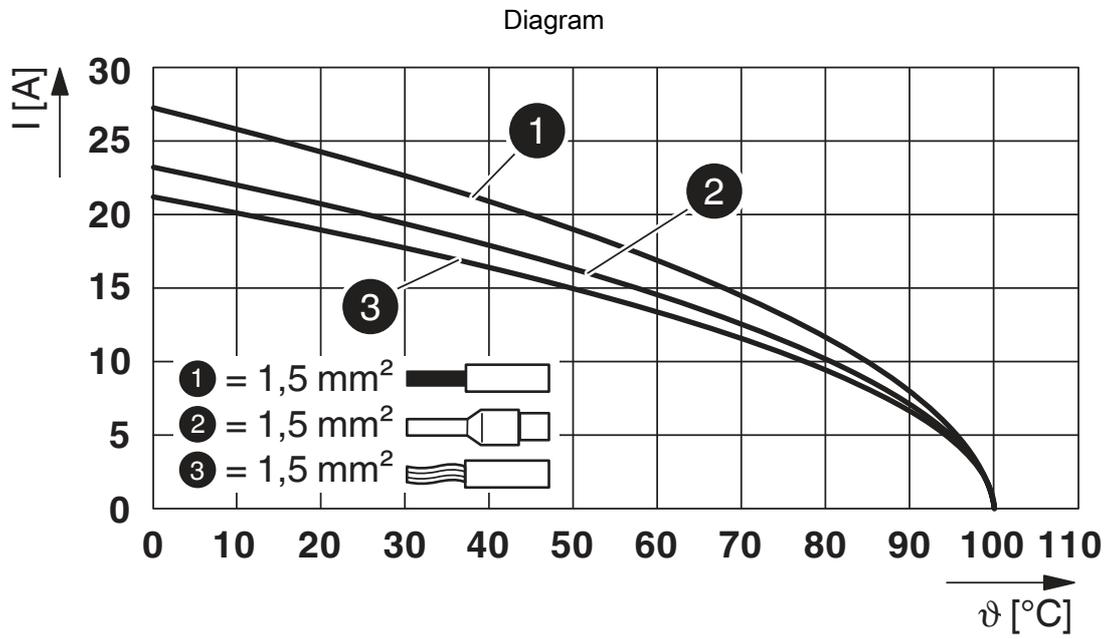

Derating diagram for 1.5 mm²

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

Classifications

ECLASS

ECLASS-11.0	27440602
ECLASS-12.0	27440602
ECLASS-13.0	27440602

ETIM

ETIM 8.0	EC002566
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

IPD W 3P2,5 F M20 BK - Panel feed-through

1088682

<https://www.phoenixcontact.com/us/products/1088682>

Mandatory accessories

IPD PL 3P2,5 M BK - Connector

1088664

<https://www.phoenixcontact.com/us/products/1088664>



Connector, Push-lock connection, number of positions: 2+PE, 0.5 mm² ... 2.5 mm², 500 V, 20 A, black, external cable diameter: 6 mm ... 9 mm and 8 mm ... 13 mm, Push-lock connection

Accessories

ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/us/products/0808587>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/us/products/0818166>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/us/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

IPD W 3P2,5 F M20 BK - Panel feed-through



1088682

<https://www.phoenixcontact.com/us/products/1088682>

SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/us/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm² ... 6 mm², also for TWIN ferrules up to 2 x 4 mm², automatic cross section adjustment, lateral insertion, equipped with fall protection

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com