



## LMR<sup>®</sup>-195-UF

### FLEXIBLE LOW LOSS CABLE ASSEMBLIES

Times LMR cable assemblies are high performance broadband, flexible, low-loss RF coaxial cables that can be used virtually anywhere, either indoors or outdoors. As a completely Times manufactured solution, performance and reliability are assured.

### FEATURES

- Excellent RF Shielding, better than 90 dB
- UV and weather resistant
- Flexible and easy to use

### Mechanical Properties


	Units	
Diameter	in (mm)	0.195 (4.95)
Weight	lb/ft (kg/m)	0.021 (0.03)
Minimum Bend Radius	in(mm)	0.5 (12.7)
Operating Temperature	°F (°C)	-40° to 185°(-40 to 85)
Tensile Strength	lb (kg)	40 (18.2)
Bending Moment	ft lb (N-m)	0.1 (0.14)
Flat Plate Crush	lb/in (kg/mm)	10 (0.18)
Storage Temp	°F (°C)	-94 to 185 (-70 to 85)

### Electrical Properties

	Units	
Impedance	Ω	50 +/- 2
Maximum Frequency	GHz	6.0
Capacitance	pF/ft (pF/m)	25.4 (83.3)
Velocity of Propagation		74%
Delay	ns/ft (ns/m)	1.27 (4.17)
Shielding		>90dB minimum
Voltage Withstand	Volts DC	1000
Jacket Spark	Volts RMS	3000
<b>Attenuation</b>	<b>dB/ft</b>	<b>dB/m</b>
900 MHz	0.13	(0.43)
2.5 GHz	0.23	(0.74)
5.8 GHz	0.35	(1.17)

### KEY APPLICATIONS

- Antenna feeder runs
- Inter/intra cabinet jumpers
- Internal component equipment wiring
- GPS system wiring

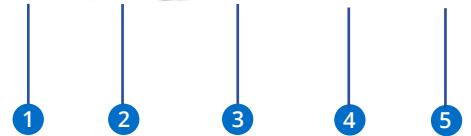


- |          |                        |               |
|----------|------------------------|---------------|
| <b>1</b> | <b>Inner Conductor</b> | Stranded BC   |
| <b>2</b> | <b>Dielectric</b>      | Foam PE       |
| <b>3</b> | <b>Outer Conductor</b> | Aluminum Tape |
| <b>4</b> | <b>Overall Braid</b>   | Tinned Copper |
| <b>5</b> | <b>Jacket</b>          | TPR           |

# LMR<sup>®</sup>-195-UF

FLEXIBLE LOW LOSS CABLE ASSEMBLIES

## Ordering Guide

# LUF195- NMNM-3.0 F

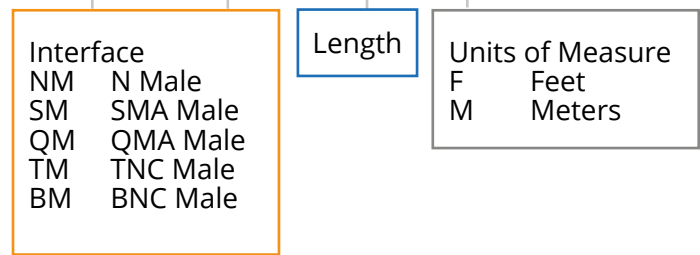

Heritage—in the air and on the ground, thousands of assemblies built over decades

Global manufacturing capability: US, Mexico, India & China

Assembled and tested LMR assemblies provide assured performance

**WORLD HEADQUARTERS**  
358 Hall Avenue, Wallingford, CT 06492  
1-800-867-2629

