
CONFIDENTIAL & PROPRIETARY INFORMATION

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM



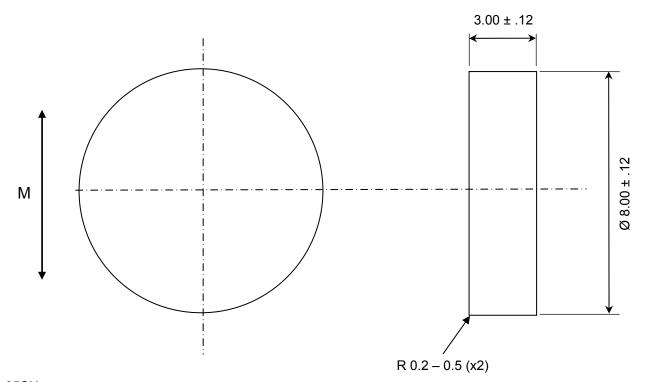

NOTES:

1. MAGNET PROPERTIES PER N-35SH:

Br: 11,800-12,200 G Hc: 10,800-11,500 Oe Hci: ≥20,000 Oe T max: 150 C

- 2. SUPPLED MAGNETIZED ACROSS THE DIAMETER
- 3. PARTS ARE NICKEL PLATED FOR 15hrs SALT SPRAY MIN

	7
REA	СН

RE	/	DESCRIPTION	DATE	BY
В		Changed CAD, incl cert, 3D	1/30/14	ВТ

TOLERANCES (UNLESS OTHERWISE NOTED) DECIMAL METRIC X.XX = ± .01 X.X = ± .25 X.XXX= ± .005 X.XX= ± .13 ANGLES ± .5° DO NOT SCALE DRAWING DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION DESCRIPTION COATING

1450 CLARK DRIVE, VALPARAISO, INDIANA 46385						
DESCRIPTION: 8.0 mm x 3.0 mm DISC MAGNET						
SENSOR MAGN	P/N: ALC8301					
GRADE: N-35SH	Drwg by: BT	REV LEVEL: B				
COATING: Nickel	Appr by: DV	Appr. Dated: 05-15-2013				

Alliance I.I.C