



RSL-3100

Miniature Xenon Flashlamp System



Excelitas' RSL-3100 miniature pulsed Xenon light source for UV-VIS-NIR applications.

The RSL-3100 is one of the smallest pulsed Xenon sources on the market today. The compact, low cost RSL-3100 light source from Excelitas Technologies provides all the benefits of the original RSL-2100 plus all the additional features that customers have been asking for.

The RSL-3100 offers SMA connector flexibility, intensity control and reduces EMI, all in a small package designed to meet CE directives. Along with a standardized "D-sub" connector, various window options and optimized lamp alignment, the new RSL-3100 meets the most demanding system requirements. The RSL-3100 operates at up to 2 Watts and offers high radiant, broadband optical energy with the long life customers have grown to expect.

Similar to all Excelitas Technologies pulsed Xenon systems, the RSL-3100 offers exceptional arc stability, microsecond flash duration and long life making it an excellent choice for analytical instruments, military systems and portable instrument applications where LEDs and other light sources fail.

Key Features

- Small size
- High radiant intensity
- Continuous spectrum UV-VIS-IR
- Long life
- Customization is available for specific OEM needs

Applications

- Absorption analysis
- Immunoassay modules
- Fluorimetry
- Spectroradiometry
- Liquid and gas chromatography
- Colorimetry
- UV/VIS/NIR applications

RSL-3100

Miniature Xenon Flashlamp System

RSL-3100

Electrical Input Specifications	
Parameter	Specification
Voltage	11-28 VDC
DC Current	0.2 Amps RMS
Peak Current	1.0 Amp
Trigger	+5V, 20-50mA peak input, 10-100µs pulse width, leading edge trigger. Optically isolated internal series resistor = 150Ω.
Internal/External Intensity Adjust	Switch Selectable
Input Connector	9-PIN D-Sub

Electrical Output	
Parameter	Specification
Voltage	400-600 ± 2% VDC adjustable
Power (Joules/sec)	2 watts max (power = joules x flash rate)
Standard Discharge Capacitor	0.047, 0.10, 0.22 µF
Flash Rate (Hz)	$F_{max} = 2/E$, where $E=1/2V^2$

Light Output	
Parameter	Specification
Spectral Range	190-2000+ nm
Stability ¹	<3% CV
Lifetime	>1x10 ⁸ Flashes

¹ CV or Coefficient of variation is defined as: $CV\% = (\text{Standard Deviation of 20 Flashes}) / (\text{Mean of 20 Flashes})$

Environmental	
Parameter	Specification
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-40 to 194°F (-40 to 90°C)
Humidity	95% RH, non-condensing
Shock and Vibration	1.5G, 5-200 Hz (Mil-STD-810C)
Safety Compliance	Designed to meet EN60950


Operating Conditions			
Capacitor (µF)	Max Input/Flash (mJ)	Max Flash Rate @ 600 VDC (Hz)	Max Flash Rate @ 400 VDC (Hz)
0.22	40	50	115
0.10	18	111	250
0.047	8.5	235	530

RSL-3100

Miniature Xenon Flashlamp System


Mechanical Dimensions

RSL-3100 Outline

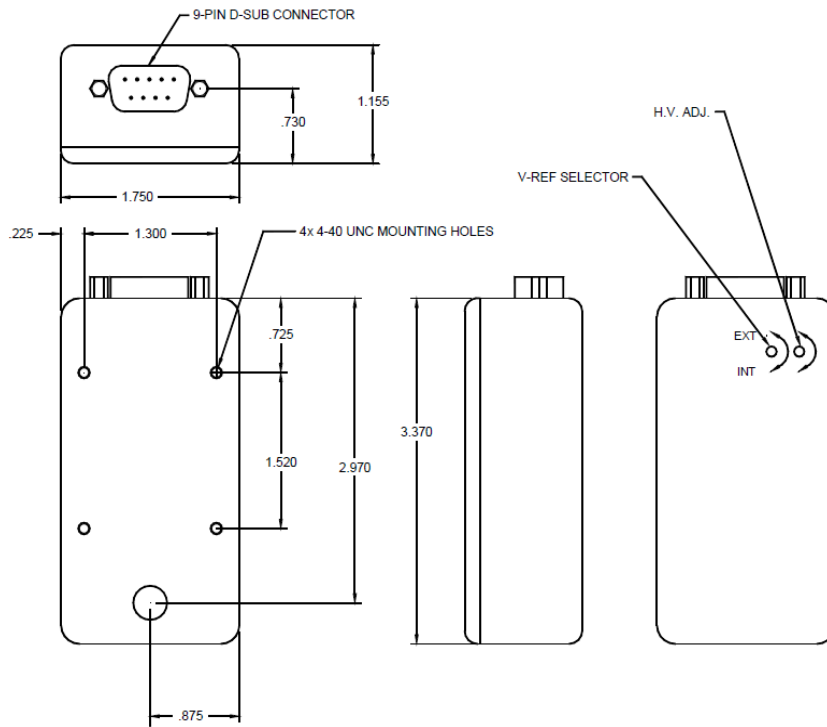

Spectral Output

RSL-3100 Spectral Distribution

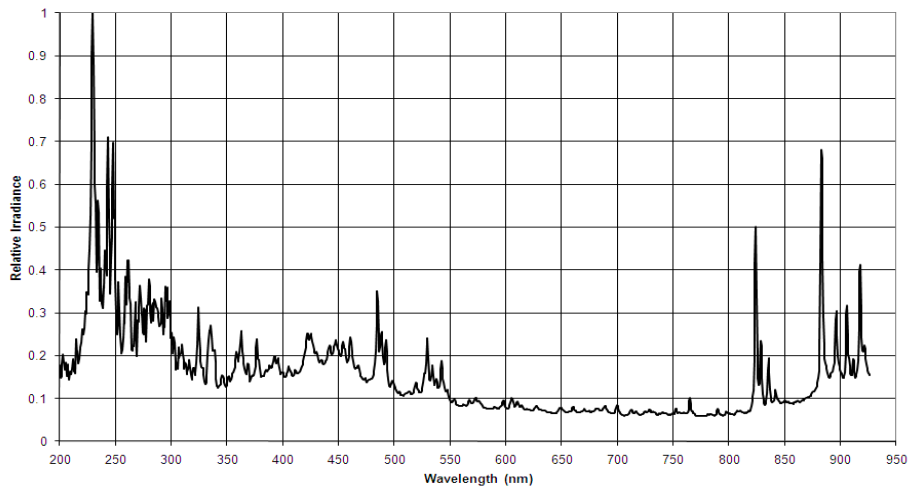

RSL-3100

Miniature Xenon Flashlamp System

Ordering Information: RSL-310A-BC

Where

A = Spectral Distribution

0 = 250-2000+nm, **1** = 190-2000+nm, **2** = 160-2000+nm

B = Discharge Capacitor

1 = 0.22 μ F, **2** = 0.10 μ F, **3** = 0.047 μ F

C = Fiber Optic Adapter

0 = No adapter, **1** = SMA 905

***Part Number Example:** RSL-3100-31. Spectral Distribution of 250-2000+nm with the 0.047 μ F discharge capacitor and SMA905 fiber adapter

NOTE: All values are nominal; specifications subject to change without notice.

About Excelitas Technologies

Excelitas Technologies is a global technology leader focused on delivering innovative, customized solutions to meet the lighting, detection and other high-performance technology needs of OEM customers.

From medical lighting to analytical instrumentation, clinical diagnostics, industrial, safety and security, and aerospace and defense applications, Excelitas Technologies is committed to enabling our customers' success in their specialty end-markets. Excelitas Technologies has approximately 3,000 employees in North America, Europe and Asia, serving customers across the world.

Excelitas Technologies
35 Congress Street
Salem, Massachusetts
01970 USA
Telephone: (+1) 978.745.3200
Toll free: (+1) 800.950.3441
Fax: (+1) 978.745.0894

**Excelitas Technologies
LED Solutions, Inc.**
160 E. Marquardt Drive
Wheeling, Illinois
60090 USA
Telephone: (+1) 847.537.4277
Fax: (+1) 847.537.4785

**Excelitas Technologies
Illumination, Inc.**
44370 Christy Street
Fremont, California
94538-3180 USA
Telephone: (+1) 510.979.6500
Toll-free: (+1) 800.775.6786
Fax: (+1) 510.687.1140

**Excelitas Technologies
Elcos GmbH**
Luitpoldstrasse 6
Pfaffenhofen, 85276
Germany
Telephone: (+49) 8441.8917.0
Fax: (+49) 8441.7191.0

**Excelitas Technologies Shenzhen Co., Ltd.
Wearnes Technology Center**
No.10 Kefa Road, Science & Industry Park
Nanshan District,
Shenzhen, Guangdong
P.R. of China 518057
Telephone: +86 2655 3861
Fax: +86 755 2661 7311

For a complete listing of our global offices, visit www.excelitas.com/ContactUs

© 2011 Excelitas Technologies Corp. All rights reserved. The Excelitas logo and design are registered trademarks of Excelitas Technologies Corp. All other trademarks not owned by Excelitas Technologies or its subsidiaries that are depicted herein are the property of their respective owners. Excelitas reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors.

