


FEATURES

- Splicing and Patching Capability
- Holds (8) LGX Adapter Plates
- Holds (5) Splice Trays
- Integrated Cable Management Rings
- Top and Bottom Cable Entry Ports
- Removable Dual Hinged Doors, Padlock Optional
- Rugged 14 Gauge Aluminum, Black

The FIS Deluxe Wall Mount Patch Panel has capacity for up to (8) LGX adapter plates. It features a large splicing bay, built in cable management brackets, cable tie downs, and a raised splice tray platform for easy splice and patch installations. Conveniently route cable through either the top or bottom of the enclosure using the open style entry holes. The two removable doors have a snap-latch security and pad lock eyelettes for additional protection.

Each enclosure accommodates up to (5) splice trays with recommended dimensions of 8.5”L x 5”W x 0.5”H or smaller. Ask an FIS sales associate about pre-loading the enclosure with fiber pigtailed, splice trays and adapter plates. Manufactured in the USA from rugged 14 gauge aluminum, and finished with a standard black or off-white powder coat.

TECH DRAWING

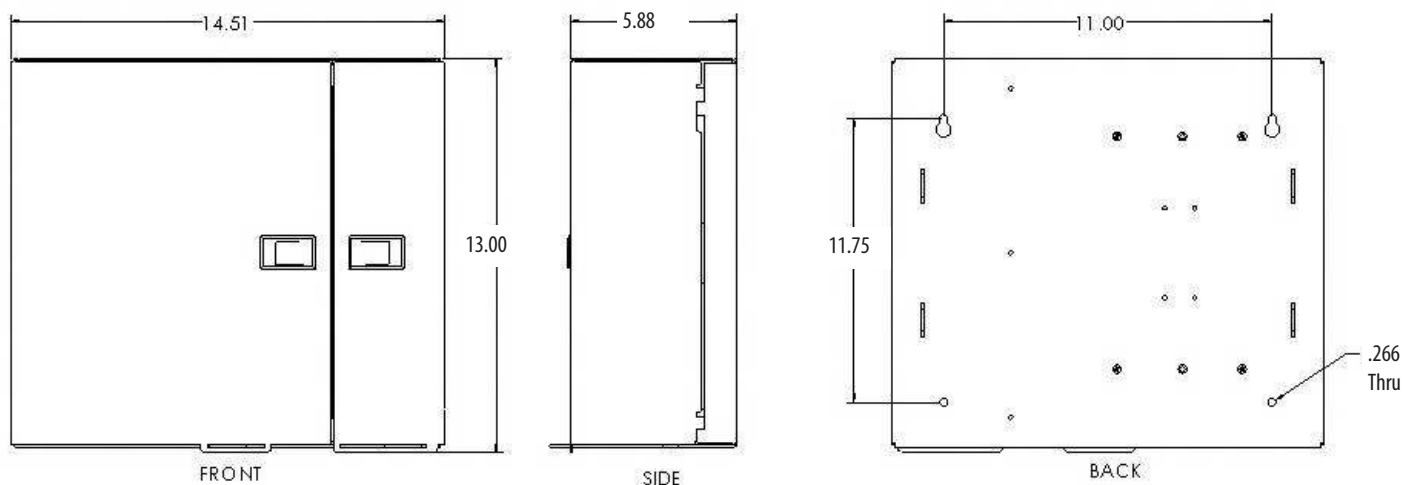

SPECIFICATIONS

Dimension	14.51"W x 13.00" H x 5.88" D
Capacity (LGX Plates/Cassettes)	8
Capacity (Splice Trays)	5
Coating	Electro Statically Applied Powder Coat; Available in Black or Off-White
Material	0.060" Aluminum
Coating	Electro Statically Applied Powder Coat; Black or Off-White

ORDERING INFORMATION

F1-DW8X	Deluxe Wall Mount, 8 Adapter Plate, Black
F1-DW8XBW	Deluxe Wall Mount, 8 Adapter Plate, Off-White

RECOMMENDED SPLICE TRAYS

F1-SPL12	Metal Splice Tray, 12 Position Fusion Splice Chip, 6.5"L x 4.7"W x .42"H
F1-SPL24-8.5	Metal Splice Tray, 24 Position Fusion Splice Chip, 8.5"L x 5.06"W x .42"H
F1-6808	Plastic Splice Tray, 12 Position Fusion Splice Chip, 7.1"L x 4.25"W x .48"H