

4


3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E1		REVISED PER ECO-11-004820	11MAR11	RK HMR
F		REVISED PER ECO-19-014983	14OCT2019	RS MZ

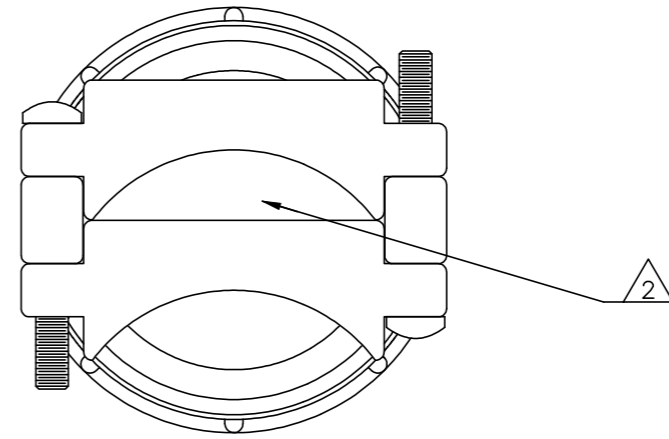


INTERMEDIATE

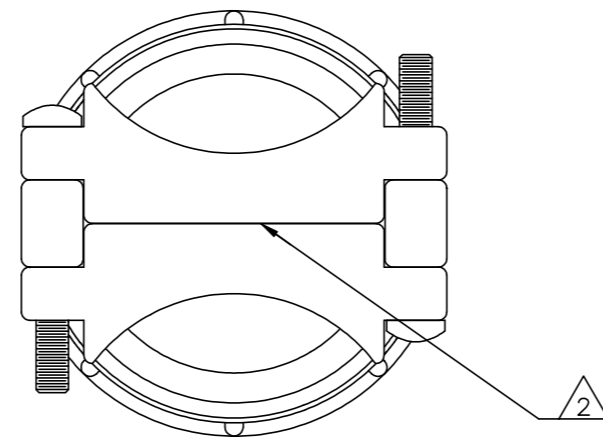

MINIMUM

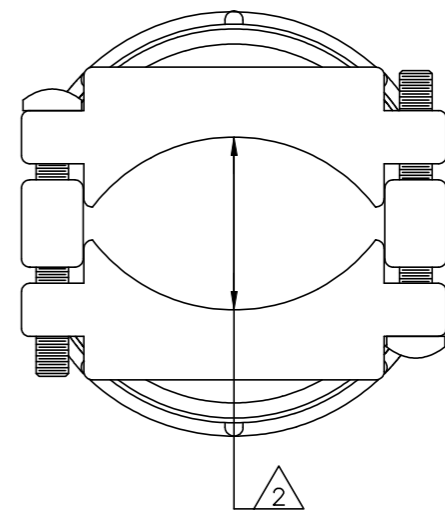

MAXIMUM

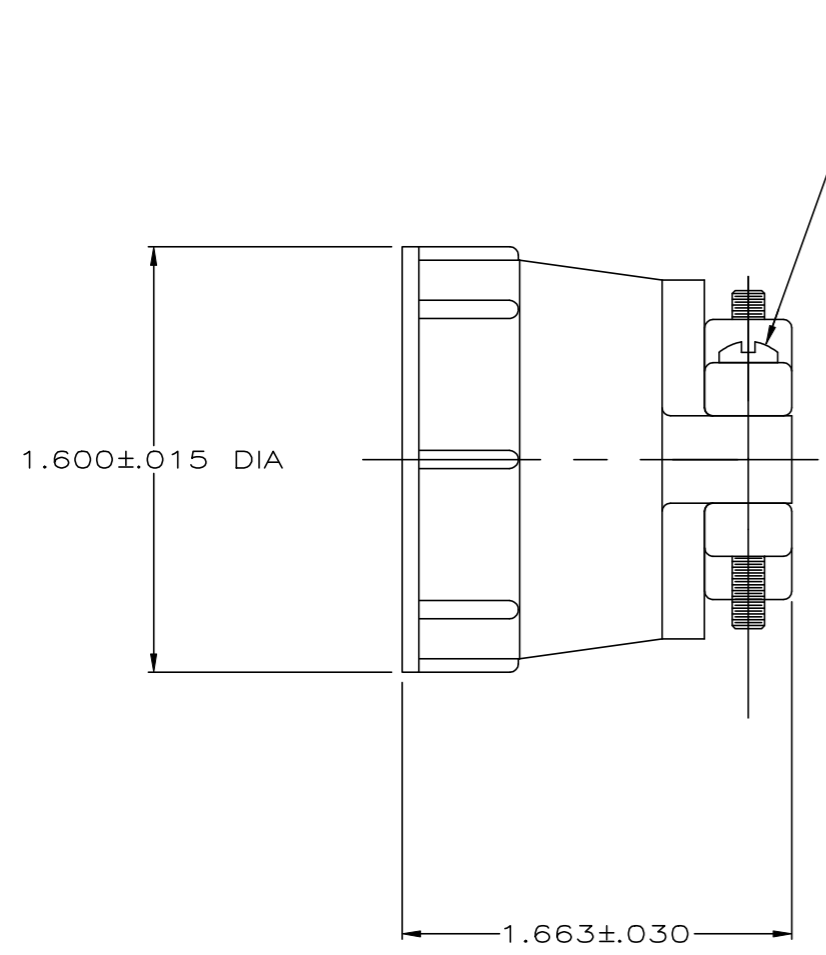

(2) #5-20 SELF-TAPPING SCREWS,
SOLID OR SLOTTED SHANK.
MATERIAL: ZINC PLATED STEEL
LENGTH: 1.00 ± .008

1 PARTS PACKAGED UNASSEMBLED.

2 CABLE CLAMPING AREA ADJUSTABLE FROM .000 TO .652 SQ IN, MAX CABLE DIA = 1.125 INCHES. TWO CLAMPING INSERTS SUPPLIED WITH ASSEMBLY, CLAMPING SREA DETERMINED BY POSITION OF INSERTS AS SHOWN AT RIGHT.

3 BULK PACKAGED KITS TO BE ORDERED IN MULTIPLES OF 250 ONLY.

4 SCREWS NON-HEXAVALENT CHROMATE COATED.

4	3	BULK	207774-4
4	4	INDIVIDUAL	207774-3
4	3	BULK	207774-2
4	4	INDIVIDUAL	207774-1
PACKAGING			PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.STAUB BG 4-3-91	TE Connectivity	
DIMENSIONS: INCHES		CHK W.G.LENKER 7-23-92	CABLE CLAMP KIT, SELF CENTERING, SHELL SIZE 23, CPC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC ± -		PRODUCT SPEC 108-10024	SIZE A2	
1 PLC ± -		APPLICATION SPEC -	CAGE CODE 00779	DRAWING NO C=207774
2 PLC ± -		WEIGHT -	RESTRICTED TO -	REV F
3 PLC ± -		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1
4 PLC ± -				
ANGLES ± -				
FINISH -				
MATERIAL THERMOPLASTIC				

207774

A