


PACKAGE: INDIVIDUAL PE BAG.

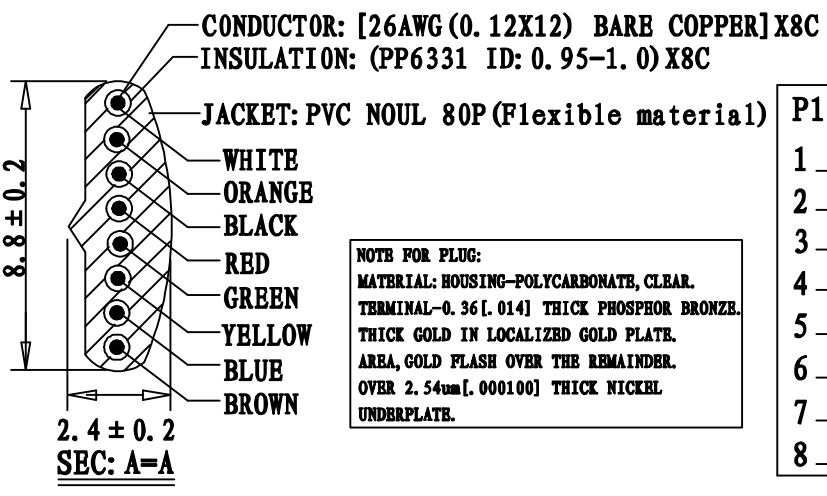

CONDUCTOR: [26AWG (0.12X12) BARE COPPER]X8C
 INSULATION: (PP6331 ID: 0.95-1.0) X8C

JACKET: PVC NOUL 80P (Flexible material)

NOTE FOR PLUG:
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
 TERMINAL-0.36 [0.014] THICK PHOSPHOR BRONZE.
 THICK GOLD IN LOCALIZED GOLD PLATE.
 AREA, GOLD FLASH OVER THE REMAINDER.
 OVER 2.54um [0.000100] THICK NICKEL
 UNDERPLATE.

	P1	P2
1	WHITE	1
2	ORANGE	2
3	BLACK	3
4	RED	4
5	GREEN	5
6	YELLOW	6
7	BLUE	7
8	BROWN	8

PART NO	DRAWING NO	COLOR	RETRACTED LENGTH ("L1")	EXTENDED LENGTH ("L2")
522-26-8800-WH-0005F	A	White	2.14FT-2.46FT	5.0FT-5.75FT
522-26-8800-WH-0007F	B	White	3.12FT-3.44FT	7.0FT-8.05FT
522-26-8800-WH-0010F	C	White	4.76FT-5.08FT	10.0FT-11.5FT
522-26-8800-WH-0012F	D	White	5.25FT-5.57FT	12.0FT-13.8FT
522-26-8800-WH-0014F	E	White	6.07FT-6.39FT	14.0FT-16.1FT
522-26-8800-WH-0025F	F	White	10.34FT-10.66FT	25.0FT-28.75FT

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC	
Industrial Cable and Connector Technology	
DRAWING NO: 671-333	CUSTOMER: L-671
ITEM NO: 8C COILD CORD P+P PLUG	UNIT: mm
DATE: 2012-02-20	ISSUE: (A/0)
DRAWN: _____	QA: _____
SALES DEPT: _____	SALES MANAGER: _____