




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	C	ECR-14-011637	18AUG2014	HZ RZ

1. MAXIMUM INSERTION LOSS: 0.20dB
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

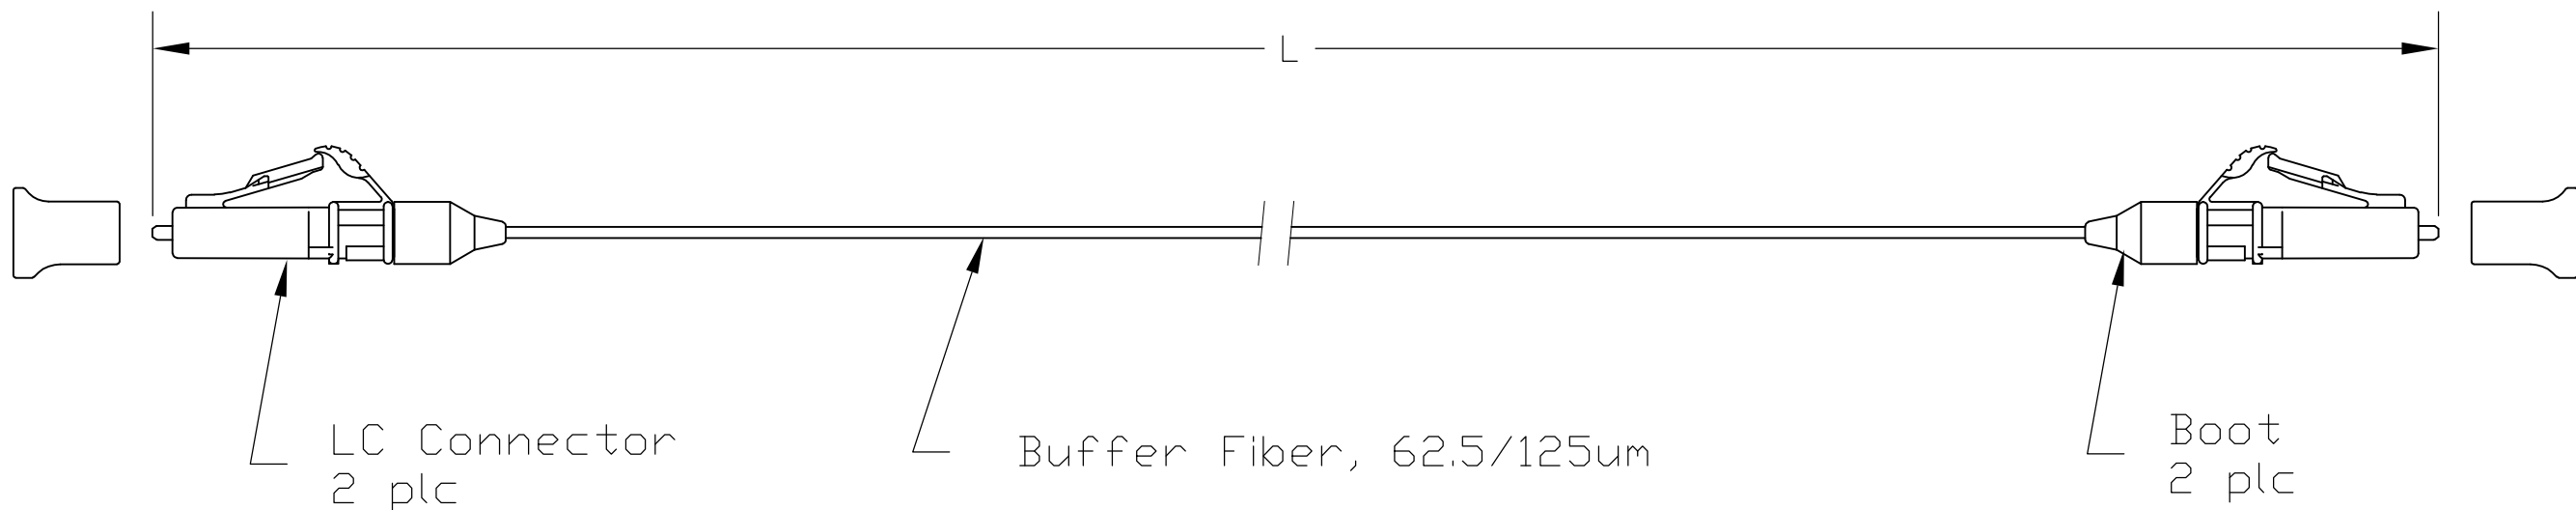

LENGTH (L)	PART NUMBER
10.00±.15 [393.70±6.00]	1-6374108-0
2.15±.05 [84.65±2.00]	6374108-6
5.00±0.08 [196.90±3.00]	6374108-5
4.00±0.08 [157.50±3.00]	6374108-4
3.00±0.05 [118.10±2.00]	6374108-3
2.00±0.05 [78.70±2.00]	6374108-2
1.00±0.05 [39.40±2.00]	6374108-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 31 AUG 05	 TE Connectivity			
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 31 AUG 05				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD J.DUNCAN 31 AUG 05	NAME Cable Assy, Fiber Optic, 900 Buffer 62.5/125um LC TO LC, Optimate			
		PRODUCT SPEC -	APPLICATION SPEC -			
MATERIAL -	FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-6374108	RESTRICTED TO -
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV C	