


REV. 1 7/9/92

COIL: @ 25°C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

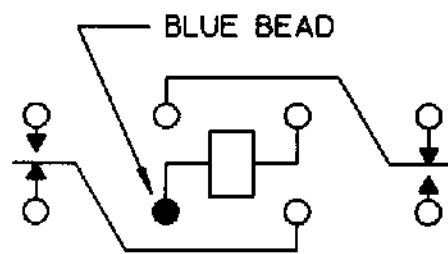

CONTACT RATING: LOW LEVEL TO 2A
 30 VDC RESISTIVE 1 AMP 30 VDC
 INDUCTIVE 100,000 OPERATIONS MINIMUM

DR. R.B. 5/19/92 CK. 7/9/92



CUST. HI-G
 CUST. NO. 2B-2A-126

TYPE 'FW' RELAY

FW1201G04