
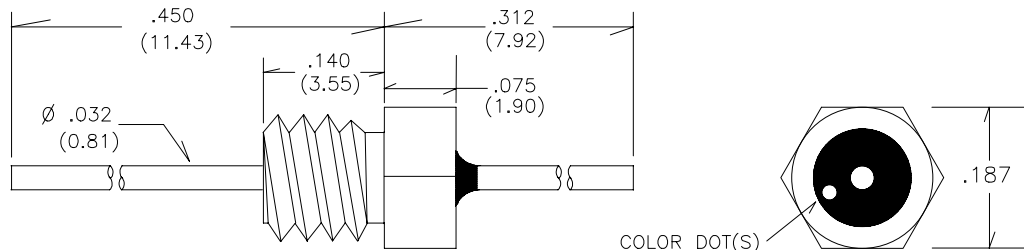


B7C000D  
Short 8-32  
"0" Cap. Feed-Thru



### = inches  
(###) = mm

thread: 8-32 UNC 2A

COLOR DOT(S)

- \* RoHS Compliant
- \* Discoidal Capacitor Construction

PART NUMBER	EMI P/N:	CAP. (pF)	COLOR DOT(S)	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B7C000D		0		200	10	---	---	---	---	---

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%

DISSIPATION FACTOR: 3.5% MAX.

INSULATION RESISTANCE:  
25° C=10,000 Mohm Min.  
125° C=1,000 Mohm Min.

DIELECTRIC STRENGTH (DWV):  
250% of WVDC (5 seconds)

TEMPERATURE CHARACTERISTIC:  
X7R or better

PHYSICAL

DIMENSION TOLERANCE:  
CASE LENGTH: +/- .010" (.250mm)  
LEAD LENGTH: +/- .030" (.762mm)  
LEAD DIAMETER: +/- .002" (.051mm)

MATERIAL AND FINISH:  
CASE: C12L14 CRS  
LEAD: Copper (1/2 Hard)  
FINISH: Silver per QQ-S-365

IDENTIFICATION & LIMITS

MARKING: Color Dot standard per chart

OPERATING TEMP: -55° C to +125° C

INSTALLATION TEMP: N/A

MAXIMUM MOUNTING TORQUE: 6.0 in\*lbs

VENDOR: EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTERS, EMI, SMALL (SHALLOW HEAD) 8-32 THREADED BODY		
FSCM NO.	DWG NO. B7C000D	REV D		
SCALE				