

## FEATURES


- Recall Function To Instantly Read-out Up To 100 Sets Manually Saved Data
- Min/Max/Avg Recording Of All Channels USB Interface
- Large Backlit LCD Shows All Channels On Display
- Measures K, J, E, T, N, R, S Type Thermocouples
- Temperature Alarm Function Data Hold Function
- Datalogging Up To 32,000 Points Each Channel
- Dew Point And Wet Bulb Measurement
- Adjustable Auto Power Off Time Setting
- Fast Response With High Accuracy
- Interchangeable Digital Probe
- PC Software Included
- Bluetooth Capability
- Unit °C, °F, K, RH



**NEW!**



LED Back Light

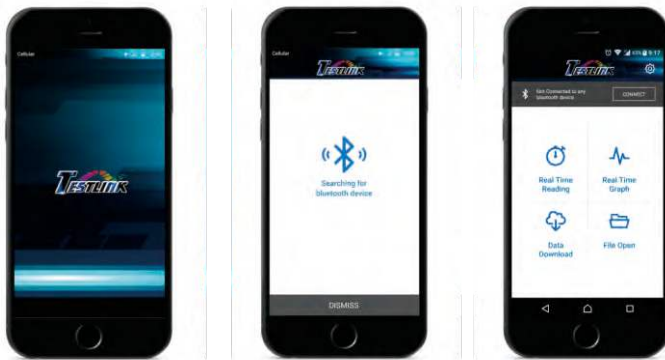

APP available for iOS & Android system

## SPECIFICATIONS

### Measurement Range:

Probe: 0%~100%RH; -20°C~60°C, -4°F~140°F  
Thermocouple: -200°C~1370°C; -328°F~2498°F

### Accuracy:

Probe: ±2.5%RH; ±0.8°C; ±1.5°F  
Thermocouple: ±0.1%rdg+0.7°C; ±0.1%rdg+1.4°F

### Resolution:

0.1%RH; 0.1°C; 0.1°F; 0.1K

### Input Protection: 30Vrms Maximum

### Battery Type: 1.5V AAA size Battery x 4 pcs

### Operating Condition: 0°C to 50°C(<90%RH)

### Storage Condition: -20°C to 60°C(<75%RH)

### Dimensions: 187 x 75 x 29 (mm)

### Accessories:

User's manual, micro USB cable, battery, Windows software, carrying case, K type bead probe x 1 pc, BT-01 Bluetooth adapter.



# CENTER®

## CENTER TECHNOLOGY CORP.

4F, No.415, Jung-Jeng Road, Shu-Lin Dist.,

New Taipei City 238, Taiwan

TEL: 886-2-26763926 E-Mail : center@centertek.com

FAX: 886-2-26763925 http : //www.centertek.com

\* The specifications and other information in this catalogue are subject to change without prior notice.

Distributed by: