
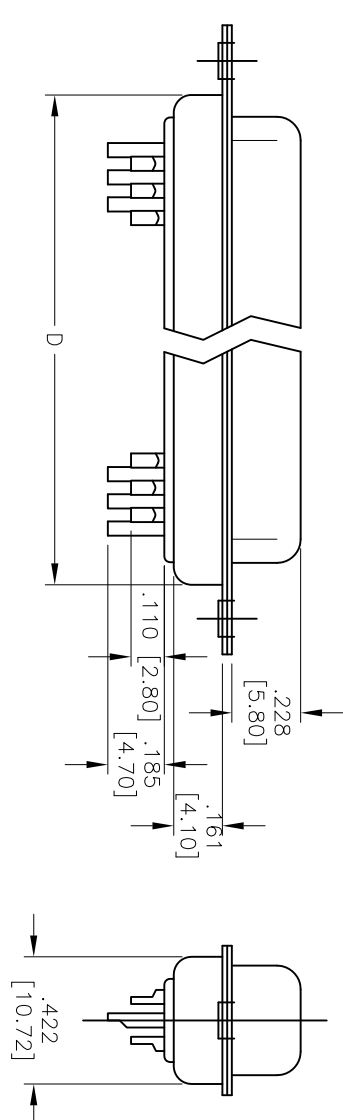


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|--------------|----------|-------|
| - | | RELEASED | 5/5/05 | |
| A | | REDRAWN | 12/09/13 | HR/GC |
| B | | UPDATE SHAPE | 12/5/14 | AY |

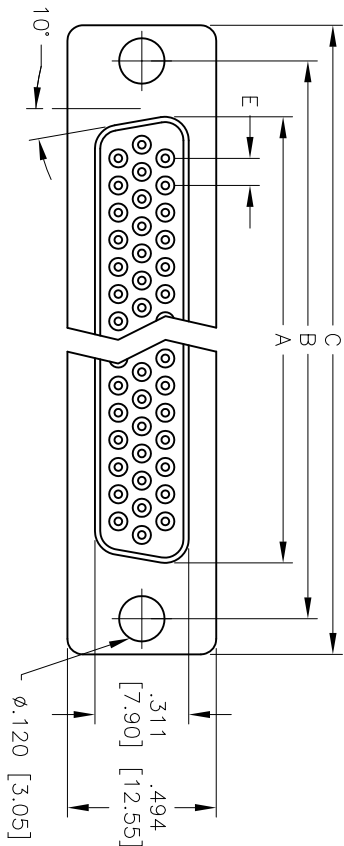

| HDTXX | DIMENSIONS | | | | |
|-------|---------------|---------------|---------------|---------------|-------------|
| | A | B | C | D | E |
| 15 | .643 [16.33] | .984 [24.99] | 1.213 [30.81] | .756 [19.20] | .090 [2.29] |
| 26 | .971 [24.66] | 1.312 [33.32] | 1.541 [39.14] | 1.091 [27.70] | .090 [2.29] |
| 44 | 1.511 [38.38] | 1.852 [47.04] | 2.088 [53.04] | 1.618 [41.10] | .090 [2.29] |
| 62 | 2.159 [54.84] | 2.500 [63.50] | 2.729 [69.32] | 2.256 [57.30] | .095 [2.41] |

SPECIFICATIONS:
 Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Steel, Tin plated
 Plating:
 Gold over Nickel underplate on contact area
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max @ 1 Amps DC
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB SOCKET
 SOLDER CUP, .120 [3.05] MOUNTING HOLES

| | |
|--|-------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLES |
| .X ±.10 | ØX ±.10 |
| .XX ±.020 | ØXXX ±.015 |
| .XXX ±.015 | ØXXXX ±.010 |
| APPROVALS | DATE |
| DRAWN | SS |
| CHECKED | |
| APPROVED | |

| | | | |
|--------------|------------|--------------|------|
| SIZE | PART NO. | HDTXX-SD | REV. |
| X | | | B |
| REF: S00087T | SCALE: NTS | SHEET 1 OF 1 | |