
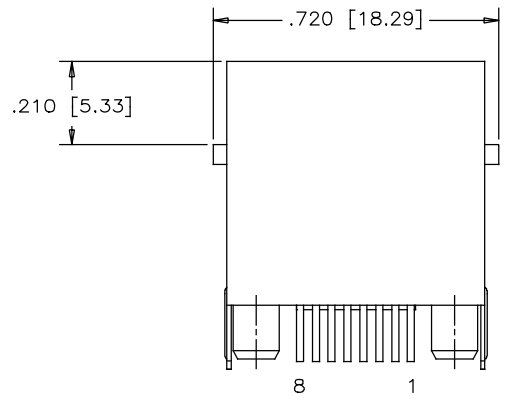
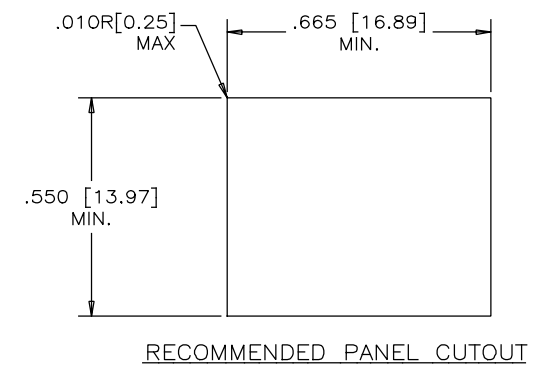
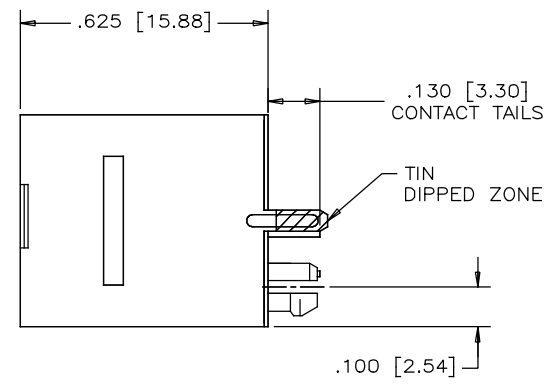


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR08/18	L.CHAN

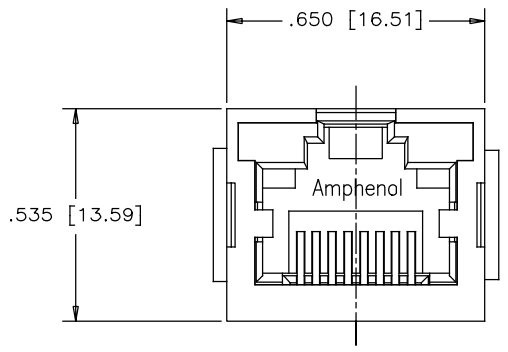

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, COLOR: BLACK

CONTACTS:

PHOSPHOR BRONZE
PLATING: 30 μ" [0.76 MICRONS] MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.


SHIELD:

STAINLESS STEEL WITH TIN DIPPED ON SOLDER TAILS.

RECOMMENDED SOLDERING TEMPERATURE:

WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM FOR 5 SEC MAXIMUM.

AMPHENOL PART NUMBER: RJHSE-3380-A1

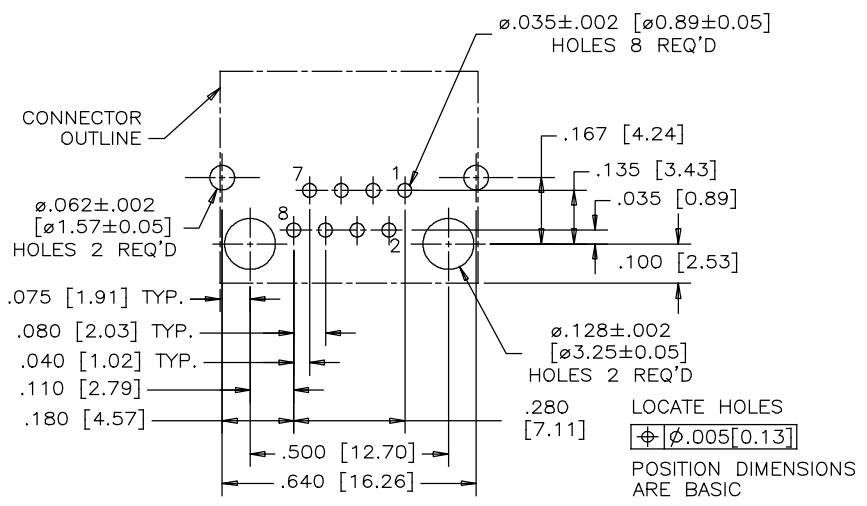

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

UNLESS SPECIFIED OTHERWISE		DRAWN	W.QIU	DATE	Amphenol Canada Corp.	
PRIMARY UNITS	INCH	CHECKED	L.CHAN	MAR08/18	www.amphenolcanada.com	
SECONDARY UNITS	MILLIMETER	M.E. APP'D			TITLE	
REFERENCE IN PARENTHESES		Q.A. APP'D			VERTICAL SINGLE PORT MODULAR	
GENERAL TOLERANCES		DWG APPR.			JACK CONNECTOR, SHIELDED WITHOUT LEADS	
1 DECIMAL PLACE	±0.025	ENG. REL. NO.			.130" LONG CONTACT TAILS- RoHS COMPLIANT	
2 DECIMAL PLACES	±0.020	REF.			DWG. NO.	REV
3 DECIMAL PLACES	±0.015	THIRD ANGLE PROJECTION			P-RJHSE-3380-A1	A
ANGULAR DEGREES	±1.0°	DO NOT SCALE DRAWING			CODE ID NO. 03554	DWG SIZE: C
					SCALE: N/A	SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.