


T491V337M010ZT7280
Obsolete

B45194E, Tantalum, MnO2 Tantalum, 330 uF, 20%, 10 VDC, SMD, Molded, Low Profile, 7343, Height Max = 2mm

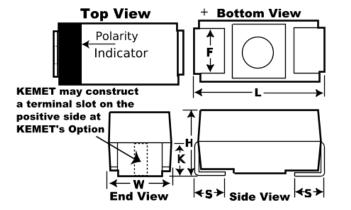

Dimensions		
Footprint	7343	
L	7.3mm +/-0.3mm	
W	4.3mm +/-0.3mm	
Н	2mm MAX	
S	1.3mm +/-0.3mm	
F	2.4mm +/-0.1mm	
К	1.7mm TYP	

Packaging Specifications	
Packaging	T&R, 330mm
Packaging Quantity	3750

General Information		
Series	B45194E	
Dielectric	MnO2 Tantalum	
Style	SMD Chip	
Description	SMD, Molded, Low Profile	
Features	Low Profile	
RoHS	Yes	
Termination	Tin	
AEC-Q200	No	
Notes	Obsolete. Old Part Number [Obsolete] Was B45194E2337M406.	

Specifications		
Capacitance	330 uF	
Capacitance Tolerance	20%	
Voltage DC	10 VDC (85C), 6.7 VDC (125C)	
Temperature Range	-55/+125°C	
Rated Temperature	85°C	
Dissipation Factor	12%	
Failure Rate	N/A	
Leakage Current	33 uA	

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.