
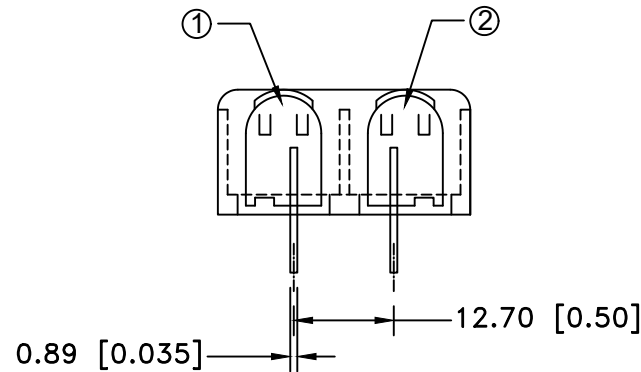
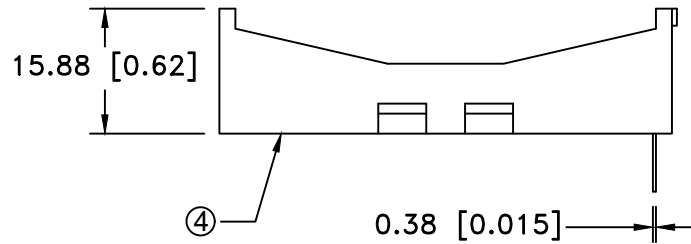
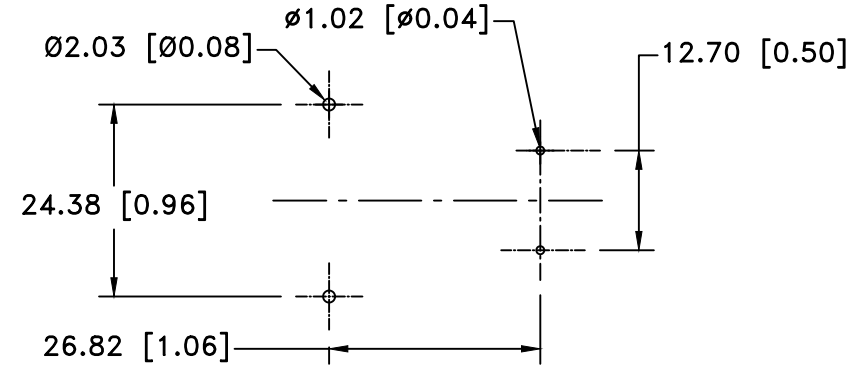


SPECIFICATION:


- HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-V-0, UL FILE NO. E107536
 TEMPERATURE RANGE: -10°C to +100°C
 CONTACTS: NICKEL PLATED STAINLESS STEEL
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS COMPLIANT

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	A	Updated to ROHS 2 Compliant Added Specification	T.B.	B.S.	
01/29/16	B	Updated Flammability Rating	T.B.	B.S.	
05/11/18	C	Dim. 4.64 was 4.70 Dim. 2.03 was 2.36	T.B.	B.S.	
02/27/19	D	Updated UL File number	T.B.	B.S.	

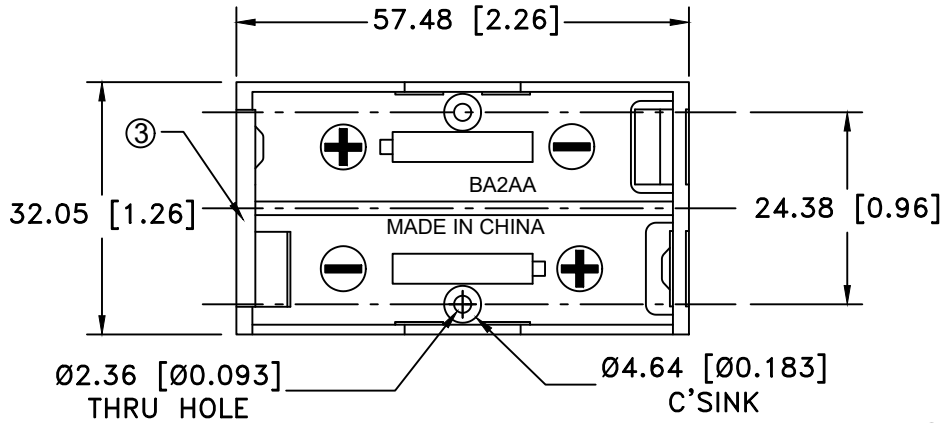

ITEM NO.	PART NO.	MATL. SPECIFICATION	QTY.
1	ABG-194	POSITIVE CONTACT, 302 STAINLESS STEEL, NICKLE PLTD.	1
2	ABG-195	NEGATIVE CONTACT, 302 STAINLESS STEEL, NICKLE PLTD.	1
3	ABG-196-1	RIGHT NEG./POS. CONTACT, 302 STAINLESS STEEL, NICKLE PLTD.	1
4	ABG-197	BLACK POLYPROPYLENE HOLDER, UL94V-0	1

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
±.5 (.020)			Approved By T.B.
Fractional ± .8 (.030)	Title TWO "AA" CELL SPRINGLESS HOLDER		
Angular ± 3°	Date 02/27/19	Drawing Number BA2AAPC-UL94V-0	