

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------------------|---------|--------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| FT | 0 | E2 | REVISED PER ECO-11-005027 | 11MAR11 | RK HMR |


NOTES:
PHYSICAL PROPERTIES:
 HOUSING MATERIAL: THERMOPLASTIC, PC
 FLAMABILITY: UL94V-0
 COLOR: BLACK
TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
 PITCH: 11.0mm(.433)
 WIRE RANGE: 14-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
 MAX CURRENT: 25A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP: -40°C TO 120°C

1 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

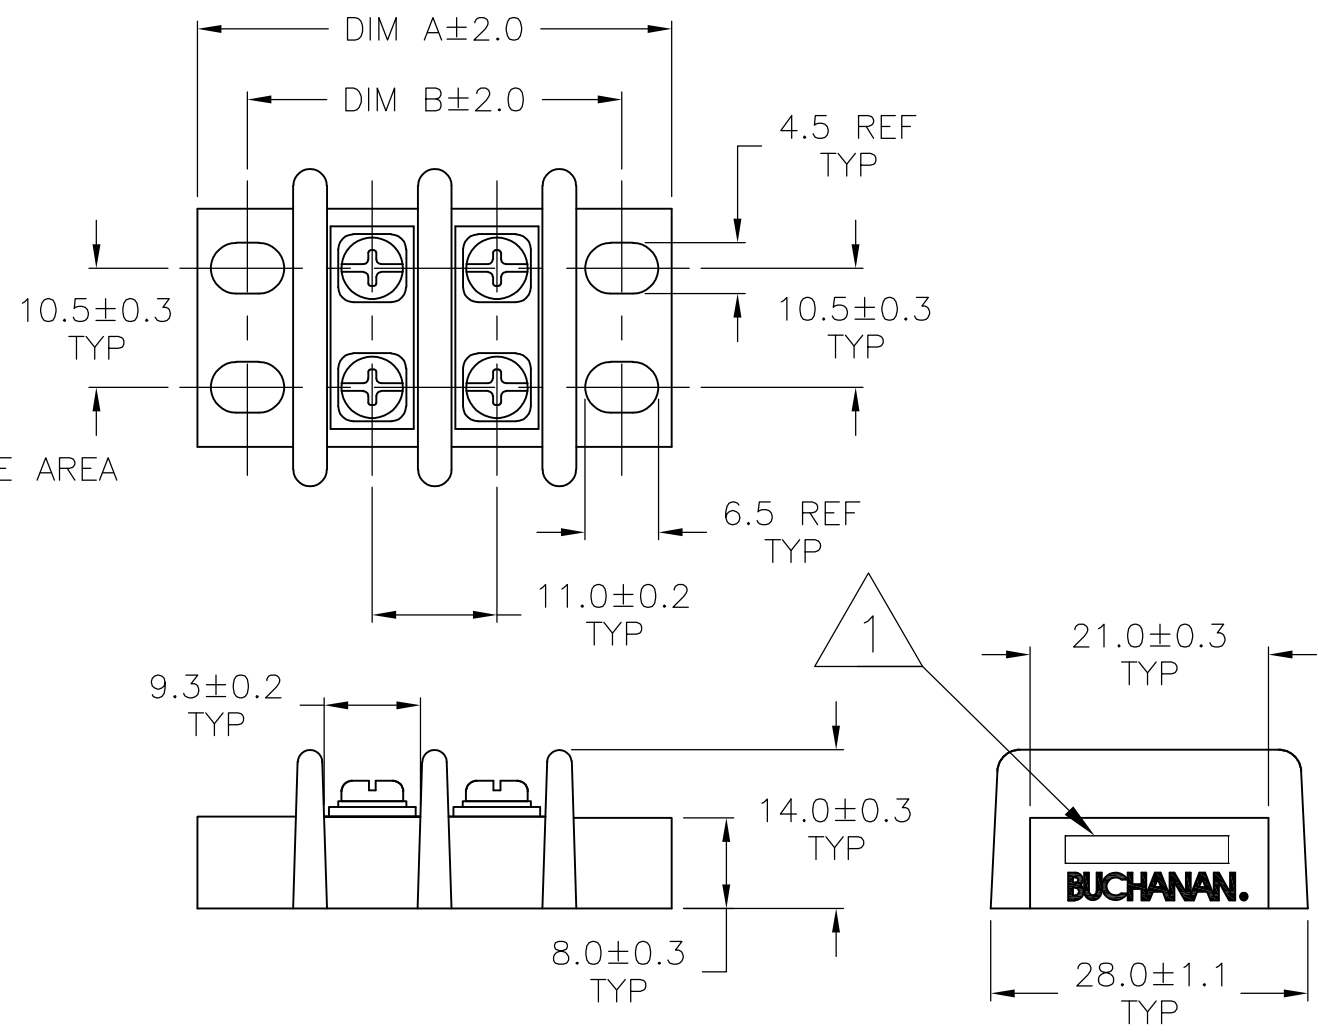

| | | | |
|-------|-------|-----------|-------------|
| 296.1 | 304.9 | 26 | 2-1546477-6 |
| 285.1 | 293.9 | 25 | 2-1546477-5 |
| 274.1 | 282.9 | 24 | 2-1546477-4 |
| 263.1 | 271.9 | 23 | 2-1546477-3 |
| 252.1 | 260.9 | 22 | 2-1546477-2 |
| 241.1 | 249.9 | 21 | 2-1546477-1 |
| 230.1 | 238.9 | 20 | 2-1546477-0 |
| 219.1 | 227.9 | 19 | 1-1546477-9 |
| 208.1 | 216.9 | 18 | 1-1546477-8 |
| 197.1 | 205.9 | 17 | 1-1546477-7 |
| 186.1 | 194.9 | 16 | 1-1546477-6 |
| 175.1 | 183.9 | 15 | 1-1546477-5 |
| 164.1 | 172.9 | 14 | 1-1546477-4 |
| 153.1 | 161.9 | 13 | 1-1546477-3 |
| 142.1 | 150.9 | 12 | 1-1546477-2 |
| 131.1 | 139.9 | 11 | 1-1546477-1 |
| 120.1 | 128.9 | 10 | 1-1546477-0 |
| 109.1 | 117.9 | 09 | 1546477-9 |
| 98.1 | 106.9 | 08 | 1546477-8 |
| 87.1 | 95.9 | 07 | 1546477-7 |
| 76.1 | 84.9 | 06 | 1546477-6 |
| 65.1 | 73.9 | 05 | 1546477-5 |
| 54.1 | 62.9 | 04 | 1546477-4 |
| 43.1 | 51.9 | 03 | 1546477-3 |
| 32.1 | 40.9 | 02 | 1546477-2 |
| DIM B | DIM A | NO OF POS | PART NUMBER |

| | | | | |
|--|--|-------------------------------|---|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S SCHEGEL 22JAN03 | STE TE Connectivity | |
| DIMENSIONS: mm | | CHK C RICHARD 1/22/03 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD C RICHARD 1/22/03 | NAME | |
| 0 PLC ± - | | PRODUCT SPEC | DOUBLE ROW BARRIER STRIP W/ WASHER 11.0mm(.433) SPACING | |
| 1 PLC ± 0.3 | | APPLICATION SPEC | - | |
| 2 PLC ± 0.25 | | WEIGHT - | SIZE A3 | CAGE CODE 00779 |
| 3 PLC ± - | | CUSTOMER DRAWING | DRAWING NO | RESTRICTED TO |
| 4 PLC ± - | | | C-1546477 | - |
| ANGLES ± 2' | | SCALE 1:1 SHEET 1 OF 1 REV E2 | | |
| MATERIAL - | | | | |
| FINISH - | | | | |