

# ARCA 806030 No MP



Sample image

**Order symbol:** ARCA 806030 No MP

**EAN:** 6418074089397

**Product nbr:** 8120019N




**El. number:**

**Description:** Cabinet. PC

- Finland:
- Denmark:
- Sweden:

**Remarks:** Grey cover. 2-point locking. hinges on the long side

**Including:** Cabinet base. door with PUR gasket. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

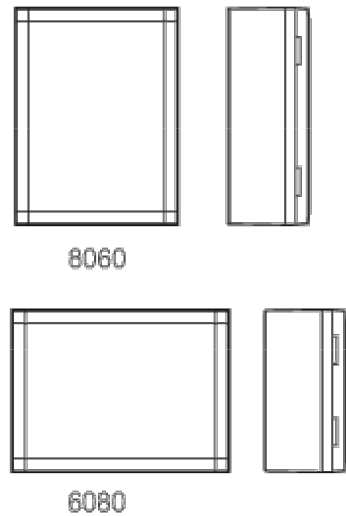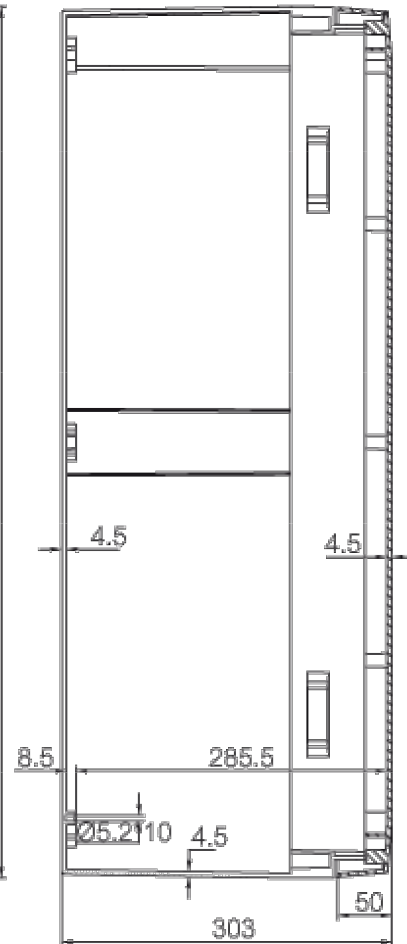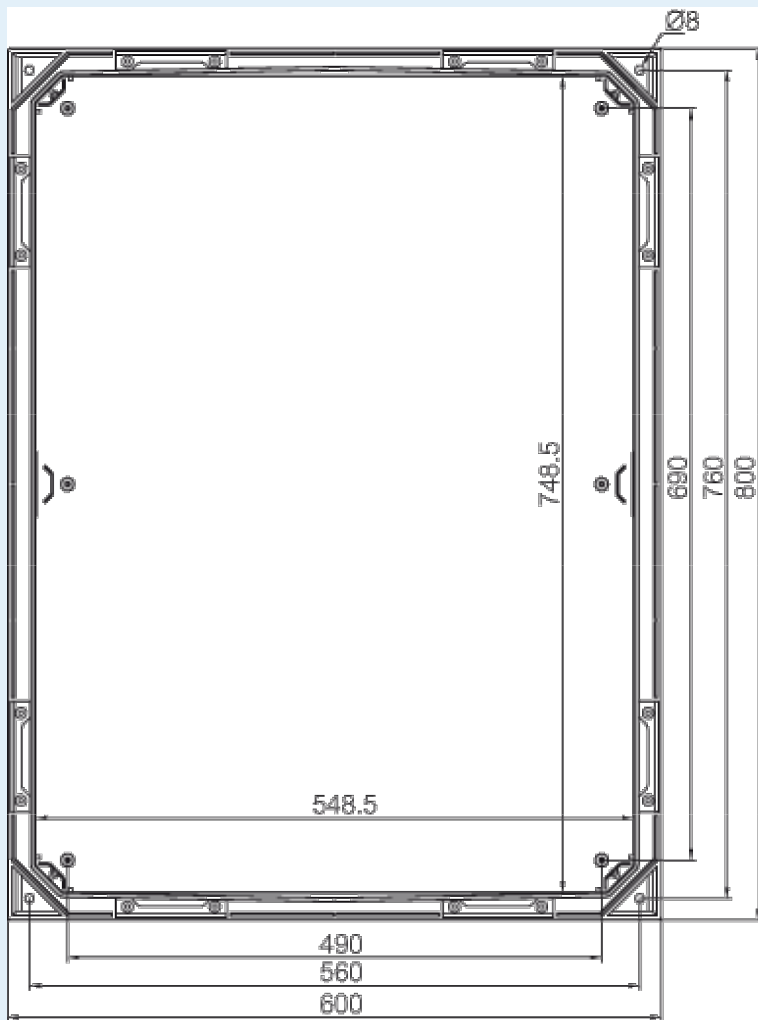

Dimensions:	Height	Width	Depth
mm:	800	600	300
inch:	31.5	23.62	12.2

#### Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

#### Temperatures:

Temperature °C (short term)::	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

#### Accessories:

RCS ARCA 8060	Rain canopy set for size 8060 (20 x 600 x 30)
PMK ARCA 60	PoleMounting kit. for pole $\varnothing$ 100-300mm (585 x 385 x 35)
IDS ARCA 8060	Inner door set (785 x 585 x 35)
DSP ARCA RM	Door stopper ARCA. right. midsize 5070-8060
DRS ARCA 806030	DIN rail frame set (785 x 585 x 35)
MPS ARCA 8060	Mounting plate (730x530x2 mm) (730 x 530 x 2)
DSP ARCA LM	Door stopper ARCA. left. midsize 5070-8060
MPMP ARCA 8060	Mounting plate multiperforated (730x530x2 mm - $\varnothing$ 3.6 mm) (730 x 530 x 2)
SBK ARCA 80	Support bar kit (715 x 50 x 30)
MPP ARCA 8060	Mounting plate perforated (730x530x2 mm - 26x11 mm) (730 x 530 x 2)
SBK ARCA 60	Support bar kit (535 x 40 x 30)
MPX ARCA 8060	Mounting plate (730x530 mm) (730 x 530 x 5)

**Rating:**

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	NEMA 1, 4, 4X, 12 and 13

**Certificates:**

Certificate FI 40467