


Economy Power 2.5 TE Internal #: 1-1969541-8 PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 18 Position, .098 in [2.5 mm] Centerline, 2 Row, Economy Power 2.5 View on TE.com >



Connectors > PCB Connectors > PCB Connector Accessories > PCB Connector Hardware > PCB Latches, Locks & Retainers

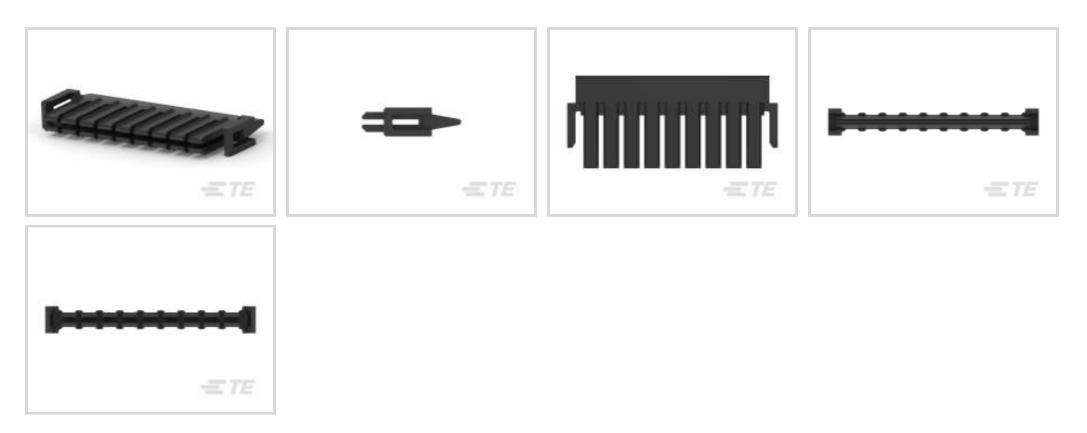

Connector & Contact Retention Accessory Type: TPA (Terminal Position Assurance)

Number of Positions: 18

Centerline (Pitch): 2.5 mm [.098 in]

Number of Rows: 2

Operating Temperature Range: -55 – 105 °C [-67 – 221 °F]

Features

Product Type Features

Connector & Contact Retention Accessory Type	TPA (Terminal Position Assurance)
Configuration Features	
Number of Positions	18
Number of Rows	2
Body Features	
Primary Product Color	Black
Housing Features	
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Product Height	11.35 mm[.45 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire

C For support call+1 800 522 6752

PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 18 Position, .098 in [2.5 mm] Centerline, 2 Row, Economy Power 2.5



Packaging Features

Packaging Quantity	2100
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 18 Position, .098 in [2.5 mm] Centerline, 2 Row, Economy Power 2.5



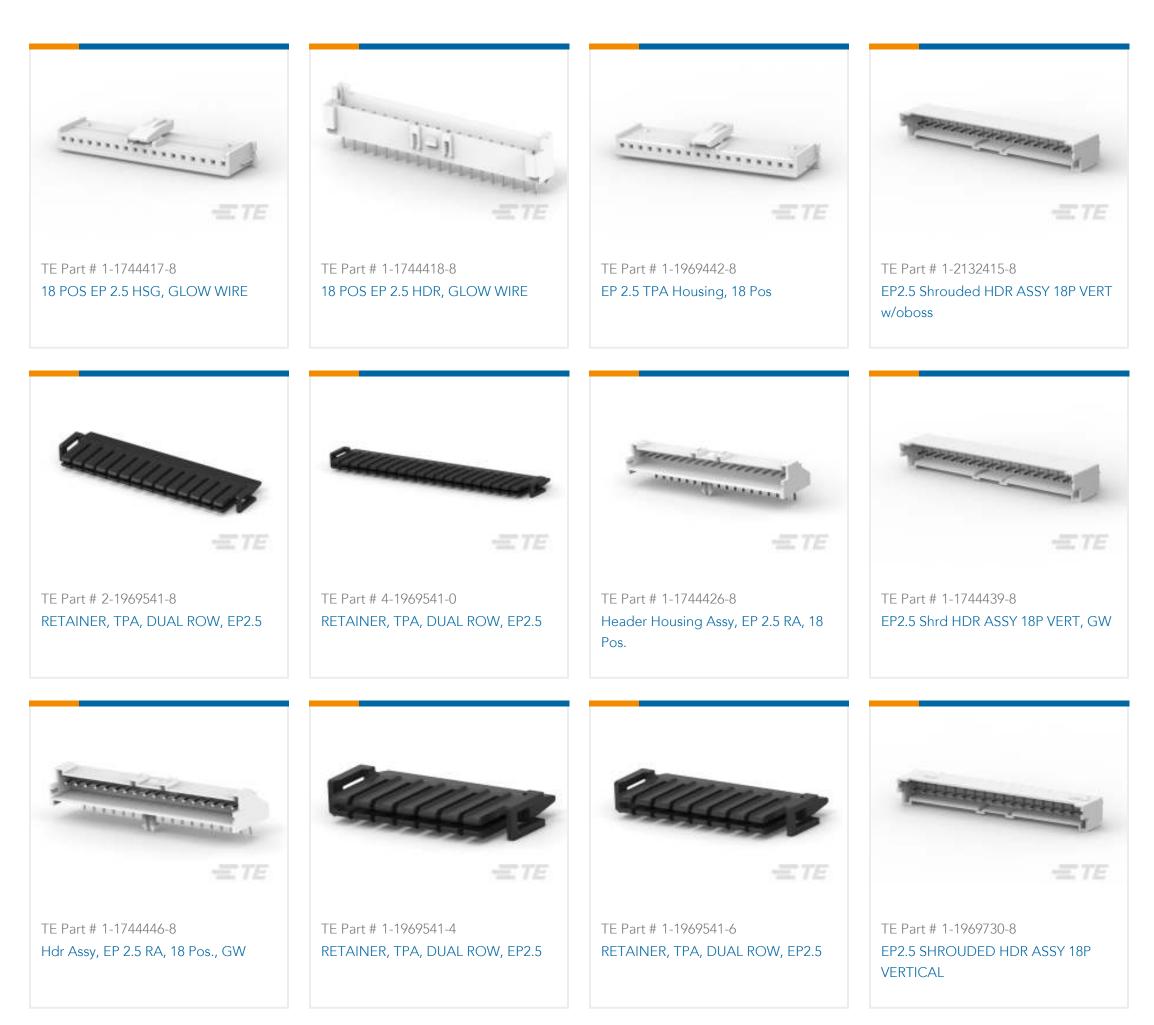




Also in the Series | Economy Power 2.5



PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 18 Position, .098 in [2.5 mm] Centerline, 2 Row, Economy Power 2.5



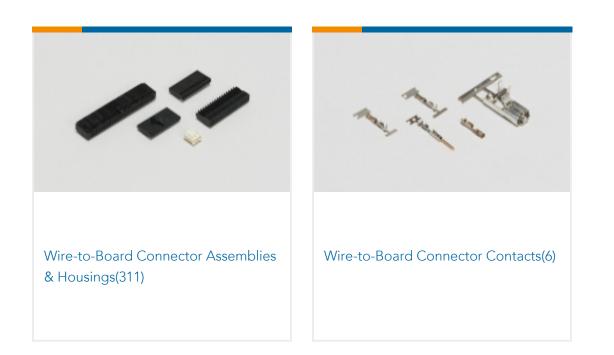

Customers Also Bought



TE Part #1-1969541-4

TE Part #1-1969540-4

EP2.5

TE Part #2265185-1

Documents

Product Drawings RETAINER, TPA, DUAL ROW, EP2.5

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1969541-8_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1969541-8_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1969541-8_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

& For support call+1 800 522 6752

PCB Latches, Locks & Retainers, TPA (Terminal Position Assurance), 18 Position, .098 in [2.5 mm] Centerline, 2 Row, Economy Power 2.5



Datasheets & Catalog Pages 7-1773461-6_EP2.5_Connector_Series

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_1-1969541-8_11302018127_dmtec

English

MD_1-1969541-8_11302018127_dmtec

English

Instruction Sheets

Instruction Sheet (U.S.)

English