

Ratings

Voltage: 300 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 8
 Gauge: 26 AWG 0.15 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.1$ mm x 19
 Resistance at 20 °C: 150 Ω /km max

Insulator

Material: FEP
 Color: red, black, white, yellow, blue, green, orange, purple
 Diameter: $\varnothing 0.82 \pm 0.10$
 Nominal thickness: 0.13 mm
 Resistance at 20 °C: 10 M Ω /km min



Shield

Material: tinned copper strands
 Strand size: $\varnothing 0.08$ mm, 85% min coverage

Outer jacket

Material: TPE, 78A
 Color: black, matte
 Diameter: $\varnothing 4.3 \pm 0.25$
 Nominal thickness: 0.6 mm

Wire marking: E339579 UL AWM STYLE 21296 26 AWG 105°C
 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY DGT

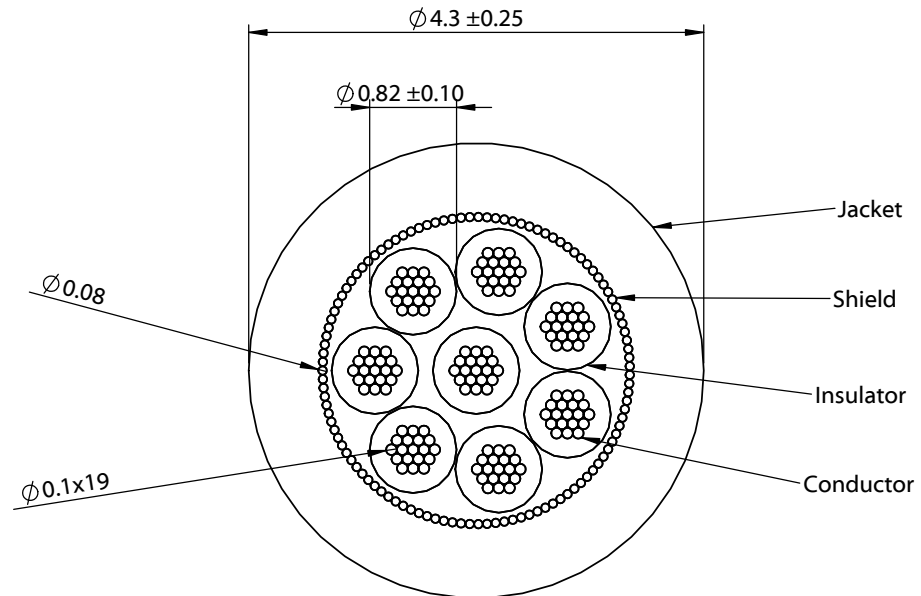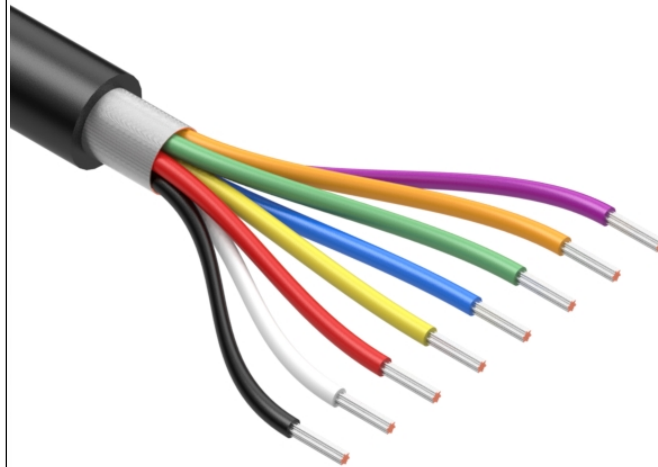

Revision:	Date:	Description:
A	10/27/2021	Initial release

Prepared: PB <small>Digitally signed by PB Date: 2021.11.01 10:46:46 -07'00'</small>
Verified: JD <small>Digitally signed by JD Date: 2021.11.03 15:38:10 -07'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS compliant Phthalate free Function test: no open, no short circuit, no intermittent
Description: Wire, 8C TS, 26 AWG, UL 21296, 300V, 105C, 4.3 mm, shielded, VW-1, TPE

<h1>TENSILITY</h1>	
tel 1.541.323.3228	800 877.670.7118
fax 1.541.323.4202	web tensility.com
Size: A	Part number: 30-02462
Scale: 14:1	Sheet 1 of 1