
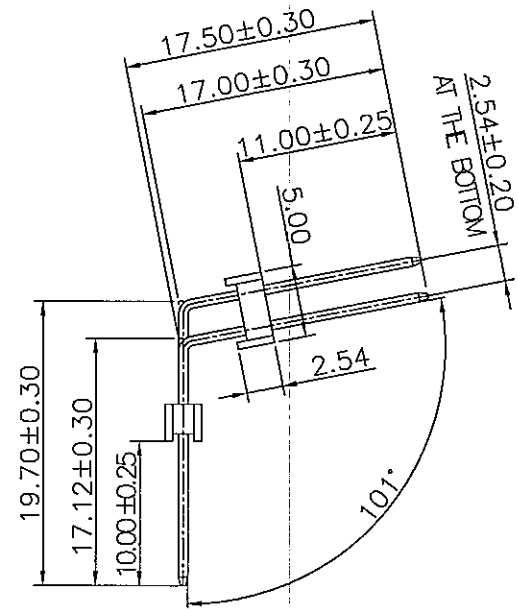


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE	2020.12.28	劉先平

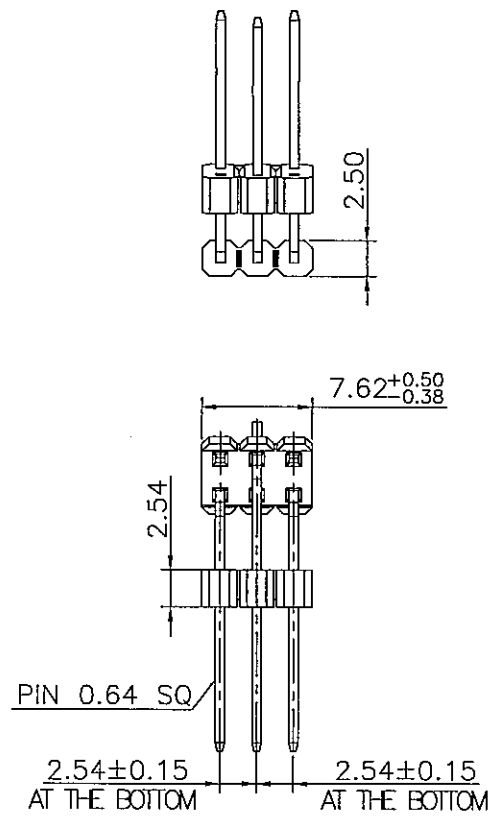


Specifications  
 Current Rating:3Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:600VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP (Halogen Free) or the equivalent material  
 All materials must meet GREENCONN hazardous substances control standards.

### Ordering Information

G PHB298- 03 XX A 650 C 1 S X

No. of Pins per Row: 03  
 Standard Plating: 02=Gold Flash, 01=Tin, 05=Gold Flash/Tin  
 Color: 1=Black  
 Standard Packing: A=Box, C=Tube

Recommended P.C.Board Layout  
 (Tolerance:±0.05)



 Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.  PAGE. 1/1	GENERAL TOLERANCE X'±5.0' X±0.30 .X'±3.0' .X±0.25 .XX'±2.0' .XX±0.15 .XXX'±1.0' .XXX±0.10		DESIGNED: 劉先平 DATE:2020.12.28	DWG. NO. GPHB298-CA650CS	TITLE. 2.54 PIN HEADER SINGLE ROW R/A TYPE CONNECTOR
		REV. 01 UNIT. mm SCALE. 2:1	APPROVED: DATE:2020.12.28	CHECKED: DATE:2020.12.28	PART NO. GPHB298-03XXA650C1SX	