

### RAST | RAST 5 IDC Connectors

TE Internal #: 9-1971846-3 PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors

#### View on TE.com >

#### Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: 3

Number of Rows: 1

Centerline (Pitch): 5 mm [.197 in ]

PCB Mount Orientation: Vertical

### Features

**E T E Connectivity** 

### Product Type Features

Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Configuration Features	
Number of Columns	3
Number of Positions	3
Number of Rows	1
PCB Mount Orientation	Vertical
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Natural

**C** For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



### **Contact Features**

PCB Contact Termination Area Plating Material Thickness	1 μm[39.37 μin]
Contact Layout	Inline
Mating Tab Width	6.3 mm[.248 in]
Mating Tab Thickness	.8 mm[.032 in]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	1 μm[39.37 μin]
PCB Contact Termination Area Plating Material Finish	Bright
Contact Shape & Form	Rectangular
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Silver
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Silver
Contact Type	Tab
Contact Current Rating (Max)	20 A

### **Termination Features**

Square Termination Post & Tail Dimension	.8 mm[.032 in]
Termination Post & Tail Length	3.5 mm[.13 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
PCB Mount Alignment Type	Polarizing Pegs
Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Housing Features	
Housing Material	Nylon
Centerline (Pitch)	5 mm[.197 in]

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



### Dimensions

Connector Length	17.3 mm[.68 in]	
Connector Height	12.8 mm[.5 in]	
Connector Width	14.9 mm[.58 in]	
Usage Conditions		
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
Industry Standards Agency/Standard	UL, VDE	
-	UL, VDE UL E28476	
Agency/Standard		
Agency/Standard Approved Standards	UL E28476	
Agency/Standard Approved Standards UL Flammability Rating	UL E28476	

## Product Compliance

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and based on the information they provided. This information is subject to chang EU RoHS compliant have a maximum concentration of 0.1% by weight in how chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadm limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished el will be CE marked as required by Directive 2011/65/EU. Components may no numbers that TE has identified as EU ELV compliant have a maximum concer	e. The part numbers that TE has identified as nogenous materials for lead, hexavalent ium, or qualify for an exemption to these ectrical and electronic equipment products t be CE marked. Additionally, the part	

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


# **Compatible Parts**









## Also in the Series | RAST 5 IDC Connectors

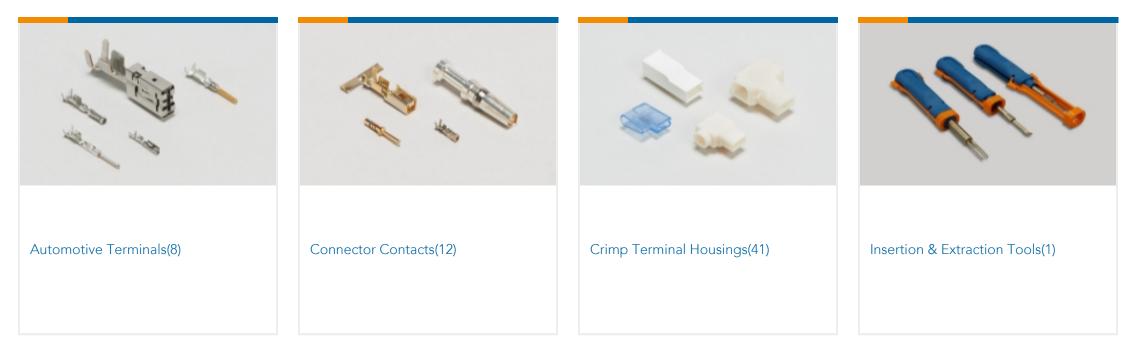

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



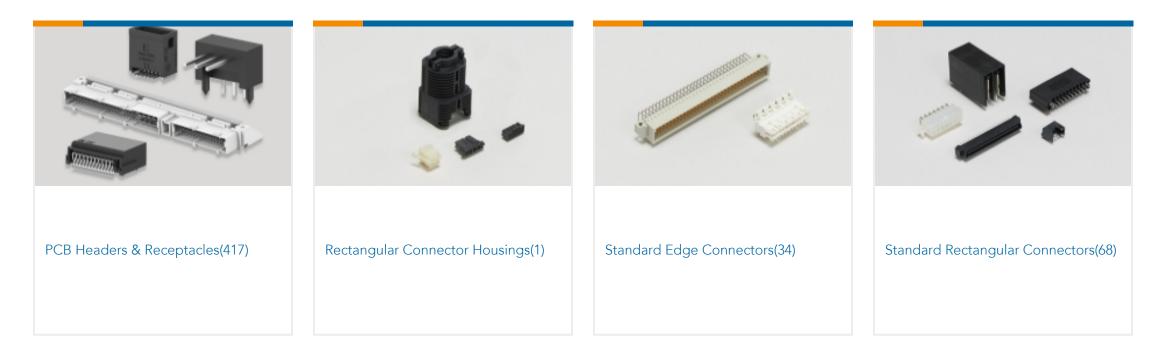

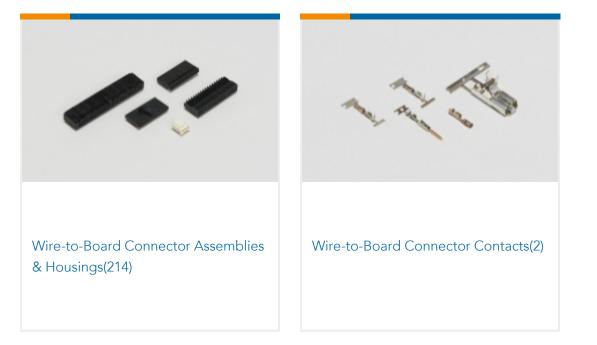

# Customers Also Bought



TE Part #3-1534799-1

**11P SELECTIVE** 

TE Part #3-2176058-8	TE Part #177555-3	TE Part #964768-3	TE Part #5-928344-4
RLP73K 3A R36 5% 2K RL	DYNAMIC 3500 HDR ASSY 12P	STD-TIM HSG SPECIAL 2P (NATURE)	STD TIMER HOUSING 4POS
TE			

TE Part #3-1534798-5

**5P SELECTIVE** 

AMP DUOPLUG MK2 CONNECTOR

TE Part #3-1879629-0 H4P 3K0 0.5% 100PPM AMP DUOPLUG MK2 CONNECTOR

## Documents

TE Part #1-1971922-1

Locking,THV

6/11P,RAST 2.5 TabHeader,Ex-

**Product Drawings** 3P, RAST 5 Tab Header, THV English **CAD** Files 3D PDF Customer View Model

ENG\_CVM\_CVM\_9-1971846-3\_B.2d\_dxf.zip

3D

PCB Mount Header, Vertical, Wire-to-Board, 3 Position, 5 mm [.197 in] Centerline, Fully Shrouded, Silver, Through Hole - Solder, RAST 5 IDC Connectors



English

Customer View Model ENG\_CVM\_CVM\_9-1971846-3\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_9-1971846-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the  $\ensuremath{\mathsf{Terms}}$  and  $\ensuremath{\mathsf{Conditions}}$  of use.

Datasheets & Catalog Pages 7-1773465-5 RAST5.0 Flyer

English

**Product Specifications** 

Product Specification

English

Agency Approvals VDE Certificate

English