

High-Speed CMOS Logic Analog Multiplexers/Demultiplexers with Latch

Features

- Wide Analog Input Voltage Range $\pm 5V$ (Max)
- Low "On" Resistance
 - $V_{CC} - V_{EE} = 4.5V$ 70Ω (Typ)
 - $V_{CC} - V_{EE} = 9V$ 40Ω (Typ)
- Low Crosstalk Between Switches
- Fast Switching and Propagation Speeds
- "Break-Before-Make" Switching
- Wide Operating Temperature Range . . . $-55^{\circ}C$ to $125^{\circ}C$
- HC Types
 - 2V to 6V Operation, Control; 0V to 10V Switch
 - High Noise Immunity: $N_{IL} = 30\%$, $N_{IH} = 30\%$ of V_{CC} at $V_{CC} = 5V$
- HCT Types
 - 4.5V to 5.5V Operation, Control; 0V to 10V Switch
 - Direct LSTTL Input Logic Compatibility, $V_{IL} = 0.8V$ (Max), $V_{IH} = 2V$ (Min)
 - CMOS Input Compatibility, $I_I \leq 1\mu A$ at V_{OL} , V_{OH}

Description

The 'HC4351, CD74HCT4351, and CD74HC4352 are digitally controlled analog switches which utilize silicon-gate

CMOS technology to achieve operating speeds similar to LSTTL with the low power consumption of standard CMOS integrated circuits.



These analog multiplexers/demultiplexers are, in essence, the HC/HCT4015 and HC4052 preceded by address latches that are controlled by an active low Latch Enable input (\overline{LE}). Two Enable inputs, one active low ($\overline{E1}$), and the other active high (E2) are provided allowing enabling with either input voltage level.

Ordering Information


| PART NUMBER | TEMP. RANGE (°C) | PACKAGE |
|---------------|------------------|--------------|
| CD54HC4351F3A | -55 to 125 | 20 Ld CERDIP |
| CD74HC4351E | -55 to 125 | 20 Ld PDIP |
| CD74HC4351M | -55 to 125 | 20 Ld SOIC |
| CD74HC4351M96 | -55 to 125 | 20 Ld SOIC |
| CD74HCT4351E | -55 to 125 | 20 Ld PDIP |
| CD74HC4352E | -55 to 125 | 20 Ld PDIP |

NOTE: When ordering, use the entire part number. The suffix 96 denotes tape and reel.

Pinouts

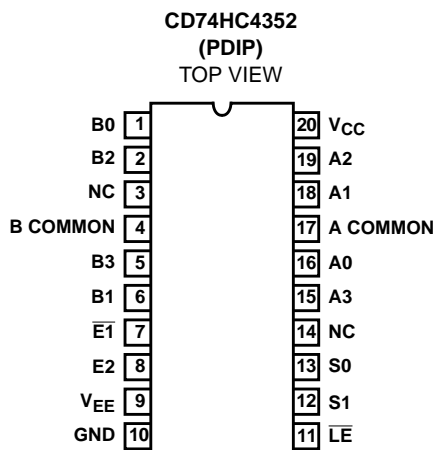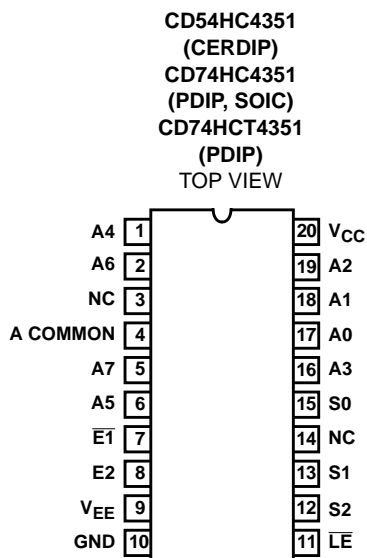

Functional Diagram

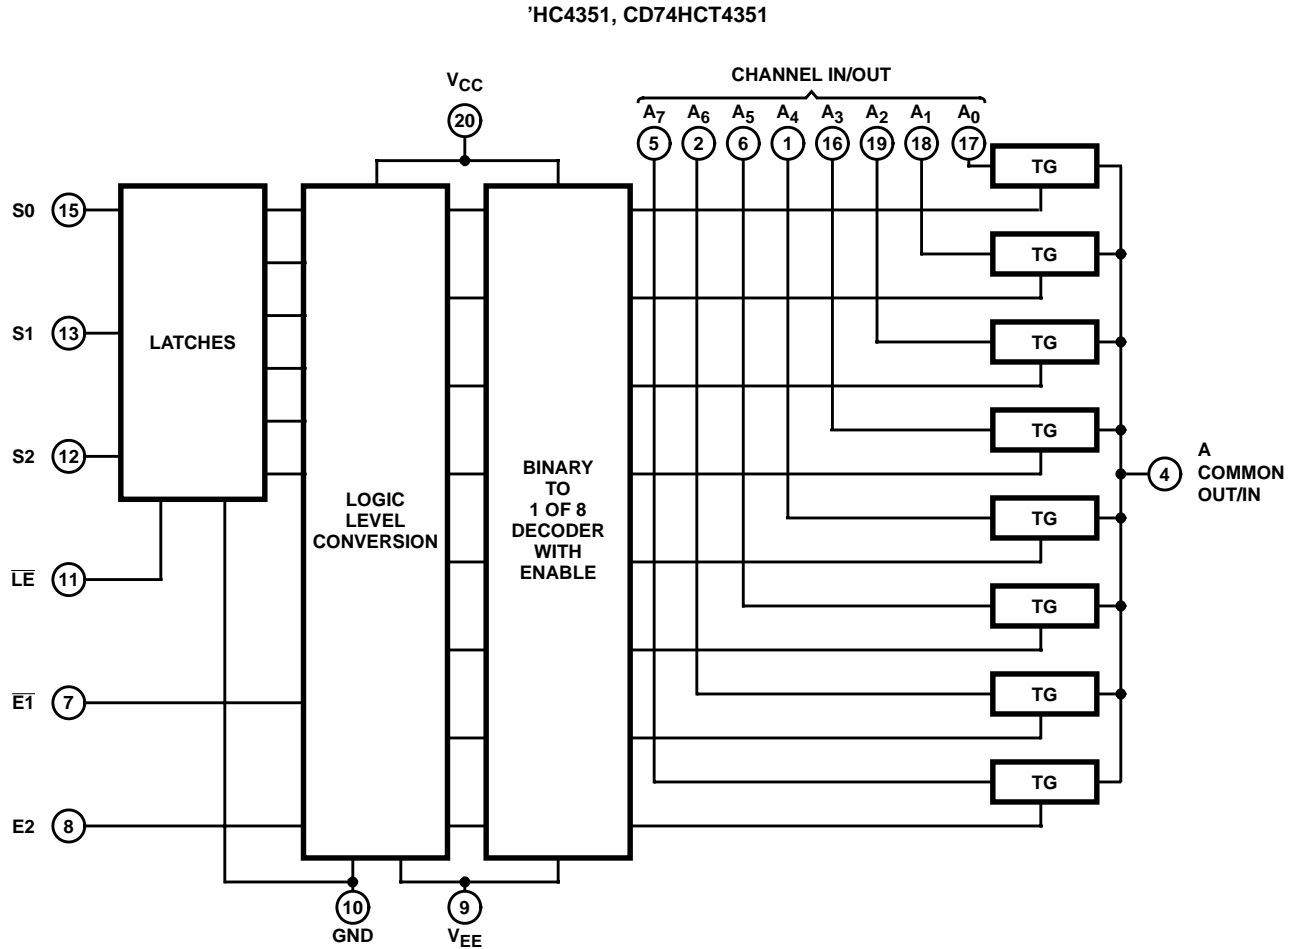

TRUTH TABLE
'HC4351, CD74HCT4351

| INPUT STATES | | | | | (NOTE 1) "ON" SWITCHES $\overline{LE} = H$ |
|-----------------|----|----|----|----|---|
| $\overline{E1}$ | E2 | S2 | S1 | S0 | |
| L | H | L | L | L | A ₀ |
| L | H | L | L | H | A ₁ |
| L | H | L | H | L | A ₂ |
| L | H | L | H | H | A ₃ |
| L | H | H | L | L | A ₄ |
| L | H | H | L | H | A ₅ |
| L | H | H | H | L | A ₆ |
| L | H | H | H | H | A ₇ |
| H | L | X | X | X | None |

H = High Voltage Level, L = Low Voltage Level, X = Don't Care

NOTE:

1. When \overline{LE} is low S0-S2 data are latched and switches cannot change state.


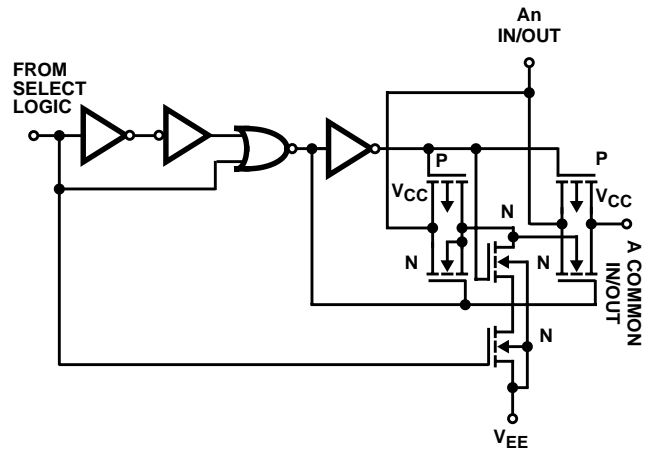


FIGURE 1. DETAIL OF ONE HC/HCT4351 SWITCH

Functional Diagram

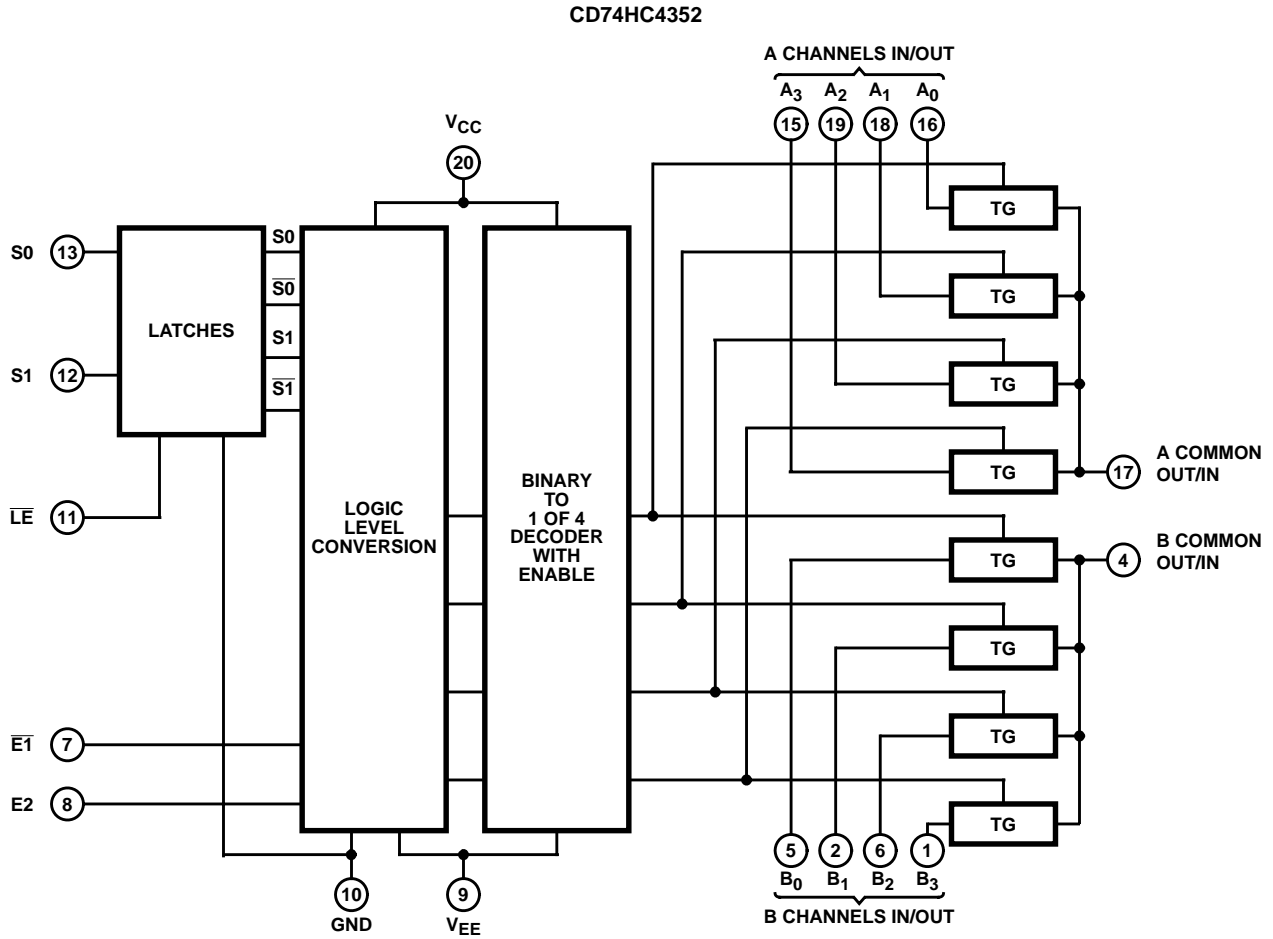

TRUTH TABLE
CD74HC4352

| INPUT STATES | | | | (NOTE 2) "ON" SWITCHES $\overline{LE} = H$ |
|-----------------|----|----|----|---|
| $\overline{E1}$ | E2 | S1 | S0 | |
| L | H | L | L | A ₀ , B ₀ |
| L | H | L | H | A ₁ , B ₁ |
| L | H | H | L | A ₂ , B ₂ |
| L | H | H | H | A ₃ , B ₃ |
| H | L | X | X | None |

H = High Voltage Level, L = Low Voltage Level, X = Don't Care
NOTE:

- When Latch Enable is "Low" channel-select data is latched and switches cannot change state.

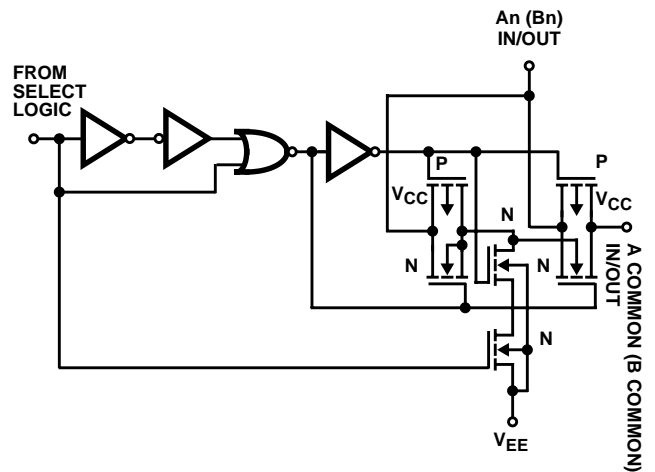


FIGURE 2. DETAIL OF ONE CD74HC4352 SWITCH

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

Absolute Maximum Ratings

| | |
|--|----------------|
| DC Supply Voltage, V_{CC} | -0.5V to 7V |
| DC Supply Voltage, $V_{CC} - V_{EE}$ | -0.5V to 10.5V |
| DC Supply Voltage, V_{EE} | 0.5V to -7V |
| DC Input Diode Current, I_{IK} For $V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$ | $\pm 20mA$ |
| DC Switch Diode Current, I_{OK} For $V_I < V_{EE} - 0.5V$ or $V_I < V_{CC} + 0.5V$ | $\pm 25mA$ |
| DC Switch Current, I_{OK} (Note 3) For $V_I > V_{EE} - 0.5V$ or $V_I < V_{CC} + 0.5V$ | $\pm 20mA$ |
| DC Output Diode Current, I_{OK} For $V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$ | $\pm 20mA$ |
| DC Output Source or Sink Current per Output Pin, I_O For $V_O > -0.5V$ or $V_O < V_{CC} + 0.5V$ | $\pm 25mA$ |
| DC V_{CC} or Ground Current, I_{CC} | $\pm 50mA$ |

Operating Conditions

| | |
|---|---|
| Temperature Range, T_A | -55°C to 125°C |
| Supply Voltage Range, V_{CC} HC Types | .2V to 6V |
| HCT Types | 4.5V to 5.5V |
| Supply Voltage Range, $V_{CC} - V_{EE}$ HC, HCT Types (Figure 3) | .2V to 10V |
| Supply Voltage Range, V_{EE} HC, HCT Types (Figure 4) | 0V to -6V |
| DC Input or Output Voltage, V_I | GND to V_{CC} |
| Analog Switch I/O Voltage, V_{IS} | V_{EE} (Min) V_{CC} (Max) |
| Input Rise and Fall Time, t_r, t_f 2V | 1000ns (Max) |
| 4.5V | 500ns (Max) |
| 6V | 400ns (Max) |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

- In certain applications, the external load-resistor current may include both V_{CC} and signal-line components. To avoid drawing V_{CC} current when switch current flows into the transmission gate inputs, the voltage drop across the bidirectional switch must not exceed 0.6V (calculated from R_{ON} values shown in the DC Electrical Specifications table). No V_{CC} current will flow through R_L if the switch current flows into terminal 3 on the 'HC4351 and CD74HCT4351; terminals 3 and 13 on the CD74HC4352.
- The package thermal impedance is calculated in accordance with JESD 51-7.

Thermal Information

| | |
|--|----------------------------------|
| Thermal Resistance (Typical, Note 4) | θ_{JA} (°C/W) |
| E (PDIP) Package | 69 |
| M (SOIC) Package | 58 |
| Maximum Junction Temperature | 150°C |
| Maximum Storage Temperature Range | -65°C to 150°C |
| Maximum Lead Temperature (Soldering 10s) | 300°C (SOIC - Lead Tips Only) |

Recommended Operating Area as a Function of Supply Voltage

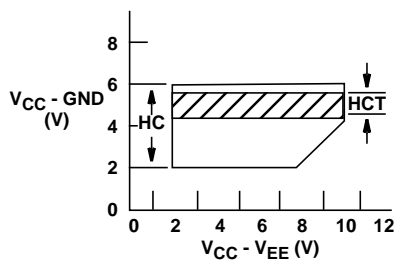


FIGURE 3.




FIGURE 4.

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

DC Electrical Specifications

| PARAMETER | SYMBOL | TEST CONDITIONS | | | | 25°C | | | -40°C TO 85°C | | -55°C TO 125°C | | UNITS | |
|--|------------------|---------------------------------------|---|--|---------------------|------|-----|------|---------------|------|----------------|------|-------|----|
| | | V _I (V) | V _{IS} (V) | V _{EE} (V) | V _{CC} (V) | MIN | TYP | MAX | MIN | MAX | MIN | MAX | | |
| HC TYPES | | | | | | | | | | | | | | |
| High Level Input Voltage | V _{IH} | - | - | - | 2 | 1.5 | - | - | 1.5 | - | 1.5 | - | V | |
| | | | | | 4.5 | 3.15 | - | - | 3.15 | - | 3.15 | - | V | |
| | | | | | 6 | 4.2 | - | - | 4.2 | - | 4.2 | - | V | |
| Low Level Input Voltage | V _{IL} | - | - | - | 2 | - | - | 0.5 | - | 0.5 | - | 0.5 | V | |
| | | | | | 4.5 | - | - | 1.35 | - | 1.35 | - | 1.35 | V | |
| | | | | | 6 | - | - | 1.8 | - | 1.8 | - | 1.8 | V | |
| “ON” Resistance I _O = 1mA Figure 9 | R _{ON} | V _{IH} or V _{IL} | V _{CC} or V _{EE} | 0 | 4.5 | - | 70 | 160 | - | 200 | - | 240 | Ω | |
| | | | | 0 | 6 | - | 60 | 140 | - | 175 | - | 210 | Ω | |
| | | | | -4.5 | 4.5 | - | 40 | 120 | - | 150 | - | 180 | Ω | |
| | | | V _{CC} to V _{EE} | 0 | 4.5 | - | 90 | 180 | - | 225 | - | 270 | Ω | |
| | | | | 0 | 6 | - | 80 | 160 | - | 200 | - | 240 | Ω | |
| | | | | -4.5 | 4.5 | - | 45 | 130 | - | 162 | - | 195 | Ω | |
| Maximum “ON” Resistance Between Any Two Channels | ΔR _{ON} | - | - | 0 | 4.5 | - | 10 | - | - | - | - | - | Ω | |
| | | | | 0 | 6 | - | 8.5 | - | - | - | - | - | Ω | |
| | | | | -4.5 | 4.5 | - | 5 | - | - | - | - | - | Ω | |
| Switch On/Off Leakage Current 4 Channels (4352) | I _{IZ} | V _{IH} or V _{IL} | For Switch OFF: When V _{IS} = V _{CC} V _{OS} = V _{EE} ; When V _{IS} = V _{EE} ; V _{OS} = V _{CC} For Switch ON: All Applicable Combinations of V _{IS} and V _{OS} Voltage Levels | 0 | 6 | - | - | ±0.1 | - | ±1 | - | ±1 | μA | |
| | | | | -5 | 5 | - | - | ±0.2 | - | ±2 | - | ±2 | μA | |
| Switch On/Off Leakage Current 8 Channels (4351) | I _{IZ} | V _{IH} or V _{IL} | | 0 | 6 | - | - | ±0.2 | - | ±2 | - | ±2 | μA | |
| | | | | -5 | 5 | - | - | ±0.4 | - | ±4 | - | ±4 | μA | |
| Control Input Leakage Current | I _{IL} | V _{CC} or GND | | - | 0 | 6 | - | - | ±0.1 | - | ±1 | - | ±1 | μA |
| Quiescent Device Current I _O = 0 | I _{CC} | V _{CC} or GND | | When V _{IS} = V _{EE} ; V _{OS} = V _{CC} ; When V _{IS} = V _{CC} ; V _{OS} = V _{EE} | 0 | 6 | - | - | 8 | - | 80 | - | 160 | μA |
| | | | -5 | | 5 | - | - | 16 | - | 160 | - | 320 | μA | |

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

DC Electrical Specifications (Continued)

| PARAMETER | SYMBOL | TEST CONDITIONS | | | | 25°C | | | -40°C TO 85°C | | -55°C TO 125°C | | UNITS |
|--|---------------------------|---|--|---------------------|---------------------|------|------|------|---------------|-----|----------------|-----|-------|
| | | V _I (V) | V _{IS} (V) | V _{EE} (V) | V _{CC} (V) | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| HCT TYPES | | | | | | | | | | | | | |
| High Level Input Voltage | V _{IH} | - | - | - | 4.5 to 5.5 | 2 | - | - | 2 | - | 2 | - | V |
| Low Level Input Voltage | V _{IL} | - | - | - | 4.5 to 5.5 | - | - | 0.8 | - | 0.8 | - | 0.8 | V |
| “ON” Resistance I _O = 1mA Figure 9 | R _{ON} | V _{IH} or V _{IL} | V _{CC} or V _{EE} | 0 | 4.5 | - | 70 | 160 | - | 200 | - | 240 | Ω |
| | | | | -4.5 | 4.5 | - | 40 | 120 | - | 150 | - | 180 | Ω |
| | | V _{CC} to V _{EE} | 0 | 4.5 | - | 90 | 180 | - | 225 | - | 270 | Ω | |
| | | | -4.5 | 4.5 | - | 45 | 130 | - | 162 | - | 195 | Ω | |
| Maximum “ON” Resistance Between Any Two Channels | ΔR _{ON} | - | - | 0 | 4.5 | - | 10 | - | - | - | - | - | Ω |
| | | | | -4.5 | 4.5 | - | 5 | - | - | - | - | - | - |
| Switch On/Off Leakage Current 4 Channels (4352) | I _{IZ} | V _{IH} or V _{IL} | For Switch OFF: When V _{IS} = V _{CC} V _{OS} = V _{EE} ; When V _{IS} = V _{EE} , V _{OS} = V _{CC} For Switch ON: All Applicable Combinations of V _{IS} and V _{OS} Voltage Levels | 0 | 6 | - | - | ±0.1 | - | ±1 | - | ±1 | μA |
| -5 | | | | 5 | - | - | ±0.2 | - | ±2 | - | ±2 | μA | |
| 0 | | | | 6 | - | - | ±0.2 | - | ±2 | - | ±2 | μA | |
| -5 | | | | 5 | - | - | ±0.4 | - | ±4 | - | ±4 | μA | |
| Switch On/Off Leakage Current 8 Channels (4351) | | | | | | | | | | | | | |
| Control Input Leakage Current | I _I | V _{CC} or GND | - | 0 | 5.5 | - | - | ±0.1 | - | ±1 | - | ±1 | μA |
| Quiescent Device Current I _O = 0 | I _{CC} | Any Voltage Between V _{CC} and GND | When V _{IS} = V _{EE} , V _{OS} = V _{CC} ; When V _{IS} = V _{CC} , V _{OS} = V _{EE} | 0 | 5.5 | - | - | 8 | - | 80 | - | 160 | μA |
| | | | | -4.5 | 5.5 | - | - | 16 | - | 160 | - | 320 | μA |
| Additional Quiescent Device Current Per Input Pin: 1 Unit Load | ΔI _{CC} (Note 5) | V _{CC} -2.1 | - | - | 4.5 to 5.5 | - | 100 | 360 | - | 450 | - | 490 | μA |

NOTE:

5. For dual-supply systems theoretical worst case (V_I = 2.4V, V_{CC} = 5.5V) specification is 1.8mA.

HCT Input Loading Table

| TYPE | INPUT | UNIT LOADS |
|--------------|--------------------------|------------|
| All | $\overline{E}1, E2, S_n$ | 0.5 |
| (4351, 4352) | \overline{LE} | 1.5 |

NOTE: Unit Load is ΔI_{CC} limit specified in DC Electrical Table, e.g., 360μA max at 25°C.

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

Switching Specifications Input $t_r, t_f = 6\text{ns}$

| PARAMETER | SYMBOL | TEST CONDITIONS | V_{EE} (V) | V_{CC} (V) | 25°C | | | -40°C TO 85°C | | -55°C TO 125°C | | UNITS |
|---|--------------------|---------------------|--------------|--------------|------|-----|-----|---------------|-----|----------------|-----|-------|
| | | | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| HC TYPES | | | | | | | | | | | | |
| Propagation Delay, Switch In to Switch Out | t_{PLH}, t_{PHL} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 35 | - | 45 | - | 55 | ns |
| | | | 0 | 4.5 | - | - | 7 | - | 9 | - | 11 | ns |
| | | | 0 | 6 | - | - | 6 | - | 8 | - | 9 | ns |
| | | | -4.5 | 4.5 | - | - | 5 | - | 7 | - | 8 | ns |
| Maximum Switch Turn "ON" Delay 4351 $\bar{E}1, E2, \bar{L}E$ to V_{OS} | t_{PZH}, t_{PZL} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 300 | - | 375 | - | 450 | ns |
| | | | 0 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | 0 | 6 | - | - | 51 | - | 64 | - | 77 | ns |
| | | | -4.5 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | $C_L = 15\text{pF}$ | - | 5 | - | 27 | - | - | - | - | - | ns |
| Maximum Switch Turn "ON" Delay 4352 $\bar{E}1, E2, \bar{L}E$ to V_{OS} | t_{PZH}, t_{PZL} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 350 | - | 440 | - | 525 | ns |
| | | | 0 | 4.5 | - | - | 70 | - | 88 | - | 105 | ns |
| | | | 0 | 6 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | -4.5 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | $C_L = 15\text{pF}$ | - | 5 | - | 35 | - | - | - | - | - | ns |
| Maximum Switch Turn "ON" Delay 4351 S_n to V_{OS} | t_{PZH}, t_{PZL} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 300 | - | 375 | - | 450 | ns |
| | | | 0 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | 0 | 6 | - | - | 51 | - | 64 | - | 77 | ns |
| | | | -4.5 | 4.5 | - | - | 50 | - | 63 | - | 75 | ns |
| | | $C_L = 15\text{pF}$ | - | 5 | - | 27 | - | - | - | - | - | ns |
| Maximum Switch Turn "ON" Delay 4352 S_n to V_{OS} | t_{PZH}, t_{PZL} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 375 | - | 470 | - | 565 | ns |
| | | | 0 | 4.5 | - | - | 75 | - | 94 | - | 113 | ns |
| | | | 0 | 6 | - | - | 64 | - | 80 | - | 96 | ns |
| | | | -4.5 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | $C_L = 15\text{pF}$ | - | 5 | - | 35 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 $\bar{E}1$ to V_{OS} | t_{PHZ}, t_{PLZ} | $C_L = 50\text{pF}$ | 0 | 2 | - | - | 250 | - | 315 | - | 375 | ns |
| | | | 0 | 4.5 | - | - | 50 | - | 63 | - | 75 | ns |
| | | | 0 | 6 | - | - | 43 | - | 54 | - | 64 | ns |
| | | | -4.5 | 4.5 | - | - | 40 | - | 50 | - | 60 | ns |
| | | $C_L = 15\text{pF}$ | - | 5 | - | 21 | - | - | - | - | - | ns |

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

Switching Specifications Input t_r , $t_f = 6\text{ns}$ (Continued)

| PARAMETER | SYMBOL | TEST CONDITIONS | V _{EE} (V) | V _{CC} (V) | 25°C | | | -40°C TO 85°C | | -55°C TO 125°C | | UNITS |
|---|-------------------------------------|-----------------------|-----------------------|---------------------|------|-----|-----|---------------|-----|----------------|-----|-------|
| | | | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| Maximum Switch Turn "OFF" Delay 4351 E2 to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 2 | - | - | 250 | - | 315 | - | 375 | ns |
| | | | 0 | 4.5 | - | - | 50 | - | 63 | - | 75 | ns |
| | | | 0 | 6 | - | - | 43 | - | 54 | - | 64 | ns |
| | | | -4.5 | 4.5 | - | - | 40 | - | 50 | - | 60 | ns |
| | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 LE to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 2 | - | - | 275 | - | 345 | - | 415 | ns |
| | | | 0 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | | 0 | 6 | - | - | 47 | - | 59 | - | 71 | ns |
| | | | -4.5 | 4.5 | - | - | 45 | - | 56 | - | 68 | ns |
| | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 Sn to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 2 | - | - | 275 | - | 345 | - | 415 | ns |
| | | | 0 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | | 0 | 6 | - | - | 47 | - | 59 | - | 71 | ns |
| | | | -4.5 | 4.5 | - | - | 48 | - | 60 | - | 71 | ns |
| | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4352 E1, E2, LE to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 2 | - | - | 275 | - | 345 | - | 415 | ns |
| | | | 0 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | | 0 | 6 | - | - | 47 | - | 59 | - | 71 | ns |
| | | | -4.5 | 4.5 | - | - | 50 | - | 63 | - | 75 | ns |
| | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - | ns |
| Setup Time 4351 Sn to LE | t _{SU} | C _L = 50pF | 0 | 2 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | 0 | 4.5 | - | - | 12 | - | 15 | - | 18 | ns |
| | | | 0 | 6 | - | - | 10 | - | 13 | - | 15 | ns |
| | | | -4.5 | 4.5 | - | - | 18 | - | 23 | - | 27 | ns |
| | | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - |
| Hold Time 4351 and 4352 Sn to LE | t _H | C _L = 50pF | 0 | 2 | 5 | - | - | 5 | - | 5 | - | ns |
| | | | 0 | 4.5 | 5 | - | - | 5 | - | 5 | - | ns |
| | | | 0 | 6 | 5 | - | - | 5 | - | 5 | - | ns |
| | | | -4.5 | 4.5 | 5 | - | - | 5 | - | 5 | - | ns |
| | | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - |
| Pulse Width 4351 and 4352 LE | t _W | C _L = 50pF | 0 | 2 | 100 | - | - | 125 | - | 150 | - | ns |
| | | | 0 | 4.5 | 20 | - | - | 25 | - | 30 | - | ns |
| | | | 0 | 6 | 17 | - | - | 21 | - | 26 | - | ns |
| | | | -4.5 | 4.5 | 25 | - | - | 31 | - | 38 | - | ns |
| | | | C _L = 15pF | - | 5 | - | 21 | - | - | - | - | - |
| Input (Control) Capacitance | C _I | - | - | - | - | 10 | - | 10 | - | 10 | pF | |
| Power Dissipation Capacitance (Notes 6, 7) 4351 | C _{PD} | - | - | 5 | - | 50 | - | - | - | - | pF | |

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

Switching Specifications Input t_r , $t_f = 6\text{ns}$ (Continued)

| PARAMETER | SYMBOL | TEST CONDITIONS | V _{EE} (V) | V _{CC} (V) | 25°C | | | -40°C TO 85°C | | -55°C TO 125°C | | UNITS |
|---|-------------------------------------|-----------------------|---------------------|---------------------|------|-----|-----|---------------|-----|----------------|-----|-------|
| | | | | | MIN | TYP | MAX | MIN | MAX | MIN | MAX | |
| Power Dissipation Capacitance (Notes 6, 7) 4352 | C _{PD} | - | - | 5 | - | 74 | - | - | - | - | - | pF |
| HCT TYPES | | | | | | | | | | | | |
| Propagation Delay, Switch In to Switch Out | t _{PLH} , t _{PHL} | C _L = 50pF | 0 | 4.5 | - | - | 7 | - | 9 | - | 11 | ns |
| | | | -4.5 | 4.5 | - | - | 5 | - | 7 | - | 8 | ns |
| Maximum Switch Turn "ON" Delay 4351 E1, E2, LE to V _{OS} | t _{PZH} , t _{PZL} | C _L = 50pF | 0 | 4.5 | - | - | 75 | - | 94 | - | 113 | ns |
| | | | -4.5 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | C _L = 15pF | - | 5 | - | 35 | - | - | - | - | - | ns |
| Maximum Switch Turn "ON" Delay 4351 Sn to V _{OS} | t _{PZH} , t _{PZL} | C _L = 50pF | 0 | 4.5 | - | - | 75 | - | 94 | - | 113 | ns |
| | | | -4.5 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | C _L = 15pF | - | 5 | - | 35 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 E1 to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | | -4.5 | 4.5 | - | - | 40 | - | 50 | - | 60 | ns |
| | | C _L = 15pF | - | 5 | - | 23 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 E2 to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | -4.5 | 4.5 | - | - | 50 | - | 63 | - | 75 | ns |
| | | C _L = 15pF | - | 5 | - | 23 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 LE to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 4.5 | - | - | 60 | - | 75 | - | 90 | ns |
| | | | -4.5 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | C _L = 15pF | - | 5 | - | 23 | - | - | - | - | - | ns |
| Maximum Switch Turn "OFF" Delay 4351 Sn to V _{OS} | t _{PHZ} , t _{PLZ} | C _L = 50pF | 0 | 4.5 | - | - | 65 | - | 81 | - | 98 | ns |
| | | | -4.5 | 4.5 | - | - | 55 | - | 69 | - | 83 | ns |
| | | C _L = 15pF | - | 5 | - | 23 | - | - | - | - | - | ns |
| Setup Time 4351 Sn to LE | | C _L = 50pF | 0 | 4.5 | - | - | 12 | - | 15 | - | 18 | ns |
| | | | -4.5 | 4.5 | - | - | 14 | - | 18 | - | 21 | ns |
| Hold Time 4351 and 4352 Sn to LE | | C _L = 50pF | 0 | 4.5 | 5 | - | - | 5 | - | 5 | - | ns |
| | | | -4.5 | 4.5 | 5 | - | - | 5 | - | 5 | - | ns |
| Pulse Width 4351 LE | t _W | C _L = 50pF | 0 | 4.5 | 25 | - | - | 31 | - | 28 | - | ns |
| | | | -4.5 | 4.5 | 25 | - | - | 31 | - | 38 | - | ns |
| Input (Control) Capacitance | C _I | - | - | - | - | - | 10 | - | 10 | - | 10 | pF |
| Power Dissipation Capacitance (Notes 6, 7) 4351 | C _{PD} | - | - | 5 | - | 52 | - | - | - | - | - | pF |

NOTES:

6. C_{PD} is used to determine the dynamic power consumption, per package.

7. $P_D = C_{PD} V_{CC}^2 f_i + \sum (C_L + C_S) V_{CC}^2 f_o$ where f_i = input frequency, f_o = output frequency, C_L = output load capacitance, C_S = switch capacitance, V_{CC} = supply voltage.

CD54HC4351, CD74HC4351, CD74HCT4351, CD74HC4352

Analog Channel Specifications $T_A = 25^\circ\text{C}$

| PARAMETER | SYMBOL | TEST CONDITIONS | TYPE | V_{EE} (V) | V_{CC} (V) | HC/HCT | UNITS |
|---|-----------|-----------------------------|------|--------------|--------------|--------|-------|
| Switch Input Capacitance | C_I | | All | - | - | 5 | pF |
| Common Capacitance | C_{COM} | | 4351 | - | - | 25 | pF |
| | | | 4352 | - | - | 12 | pF |
| Minimum Switch Frequency Response at -3dB (Figure 6, 8) | f_{MAX} | See Figure 11 (Notes 8, 9) | 4351 | - | - | 145 | MHz |
| | | | 4352 | -2.25 | 2.25 | 165 | MHz |
| | | | 4351 | - | - | 180 | MHz |
| | | | 4352 | -4.5 | 4.5 | 185 | MHz |
| Crosstalk Between Any Two Switches (Note 11) | | See Figure 10 (Notes 9, 10) | 4351 | - | - | N/A | dB |
| | | | 4352 | -2.25 | 2.25 | (TBE) | dB |
| | | | 4351 | - | - | N/A | dB |
| | | | 4352 | -4.5 | 4.5 | (TBE) | dB |
| Sine-Wave Distortion | | See Figure 12 | All | -2.25 | 2.25 | 0.035 | % |
| | | | All | -4.5 | 4.5 | 0.018 | % |
| \bar{E} or S to Switch Feedthrough Noise | | See Figure 13 (Notes 9, 10) | 4351 | - | - | - | mV |
| | | | 4352 | -2.25 | 2.25 | (TBE) | mV |
| | | | 4351 | - | - | - | mV |
| | | | 4352 | -4.5 | 4.5 | (TBE) | mV |
| Switch "OFF" Signal Feedthrough (Figure 6, 8) | | See Figure 14 (Notes 9, 10) | 4351 | - | - | -73 | dB |
| | | | 4352 | -2.25 | 2.25 | -65 | dB |
| | | | 4351 | - | - | -75 | dB |
| | | | 4352 | -4.5 | 4.5 | -67 | dB |

NOTES:

8. Adjust input voltage to obtain 0dBm at V_{OS} for, $f_{in} = 1\text{MHz}$.
9. V_{IS} is centered at $(V_{CC} - V_{EE})/2$.
10. Adjust input for 0dBm.
11. Not applicable for 'HC4351 and CD74HCT4351.

Typical Performance Curves

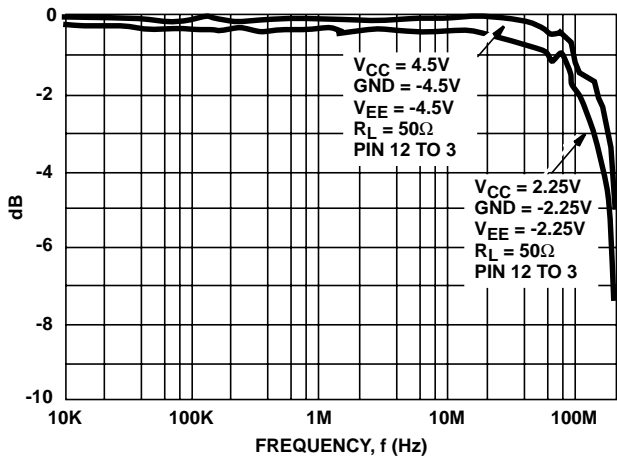


FIGURE 5. CHANNEL ON BANDWIDTH ('HC4351, CD74HCT4351)

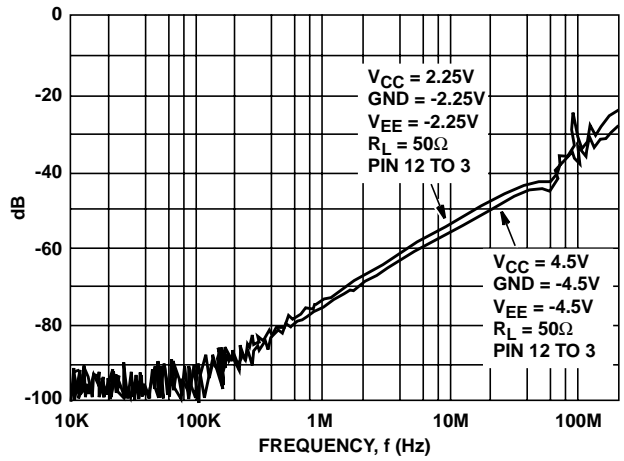


FIGURE 6. CHANNEL OFF FEEDTHROUGH ('HC4351, CD74HCT4351)

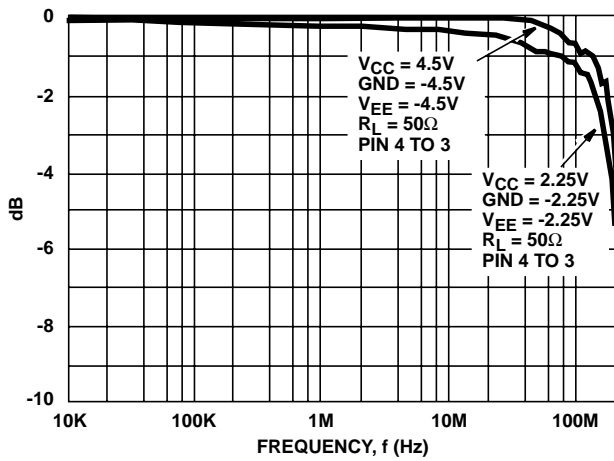


FIGURE 7. CHANNEL ON BANDWIDTH (CD74HC4352)

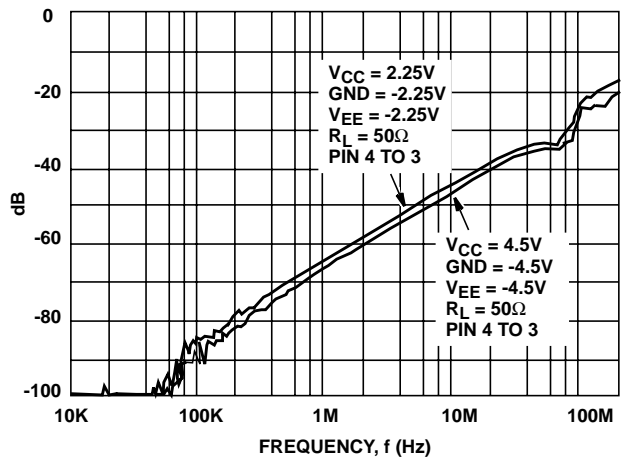


FIGURE 8. CHANNEL OFF FEEDTHROUGH (CD74HC4352)

Typical Performance Curves (Continued)

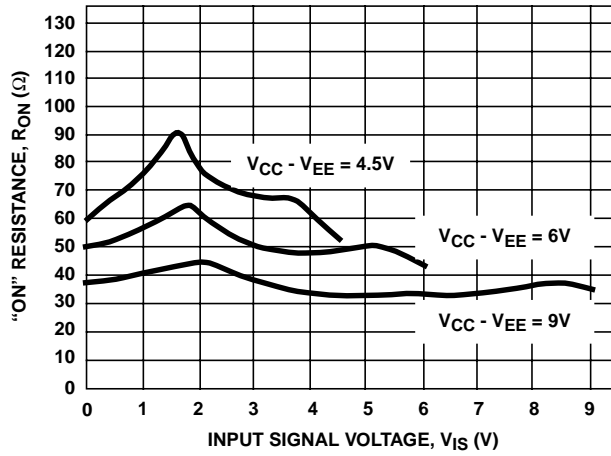


FIGURE 9. TYPICAL ON RESISTANCE vs INPUT SIGNAL VOLTAGE

Analog Test Circuits

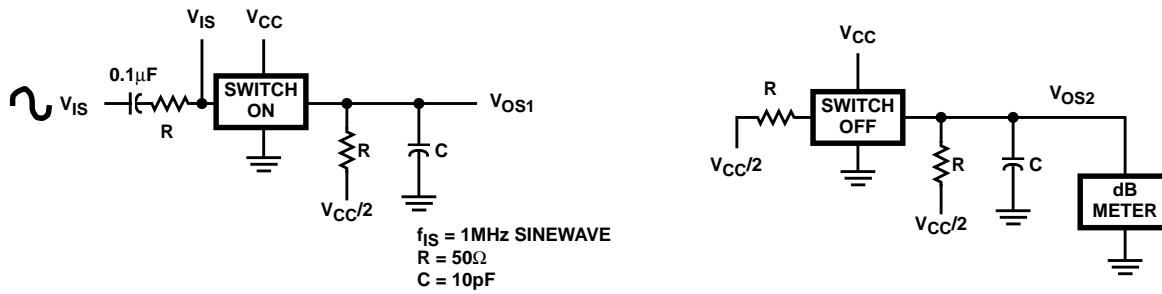


FIGURE 10. CROSSTALK BETWEEN TWO SWITCHES TEST CIRCUIT

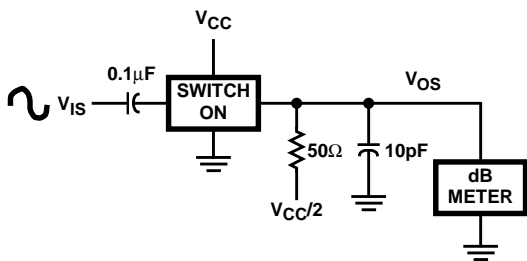


FIGURE 11. FREQUENCY RESPONSE TEST CIRCUIT

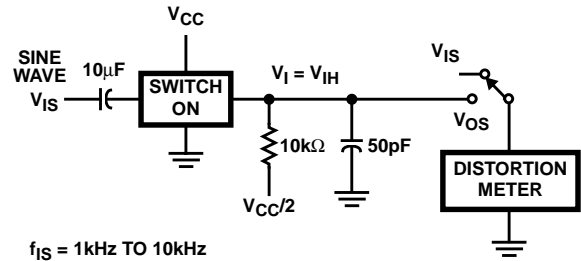


FIGURE 12. TOTAL HARMONIC DISTORTION TEST CIRCUIT

Analog Test Circuits (Continued)

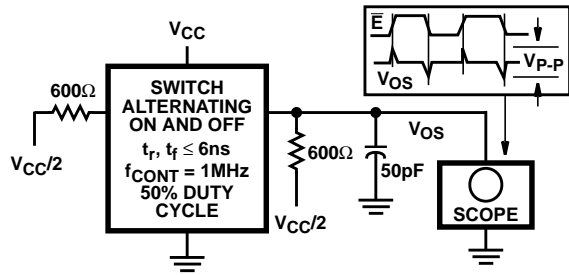


FIGURE 13. CONTROL-TO-SWITCH FEEDTHROUGH NOISE TEST CIRCUIT


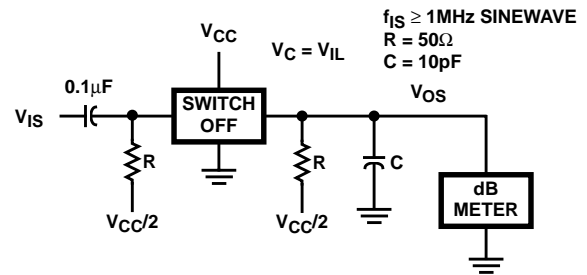



FIGURE 14. SWITCH OFF SIGNAL FEEDTHROUGH

Test Circuits and Waveforms

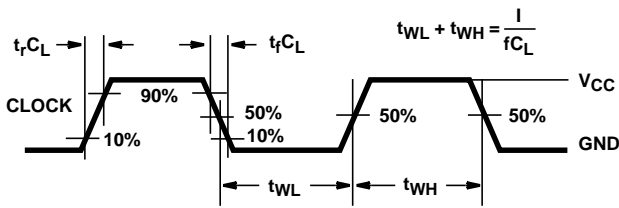

NOTE: Outputs should be switching from 10% V_{CC} to 90% V_{CC} in accordance with device truth table. For f_{MAX} , input duty cycle = 50%.

FIGURE 15. HC CLOCK PULSE RISE AND FALL TIMES AND PULSE WIDTH

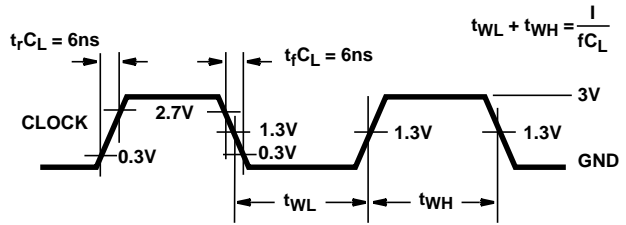

NOTE: Outputs should be switching from 10% V_{CC} to 90% V_{CC} in accordance with device truth table. For f_{MAX} , input duty cycle = 50%.

FIGURE 16. HCT CLOCK PULSE RISE AND FALL TIMES AND PULSE WIDTH

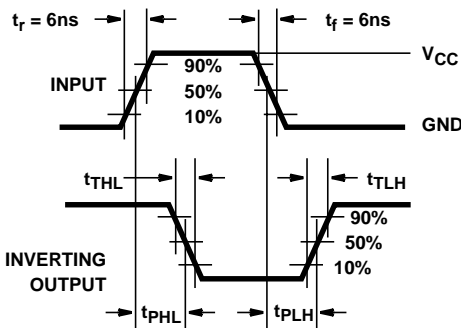


FIGURE 17. HC TRANSITION TIMES AND PROPAGATION DELAY TIMES, COMBINATION LOGIC

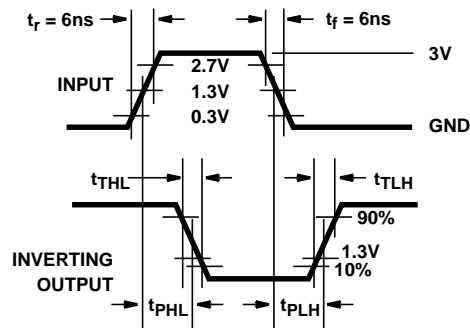


FIGURE 18. HCT TRANSITION TIMES AND PROPAGATION DELAY TIMES, COMBINATION LOGIC

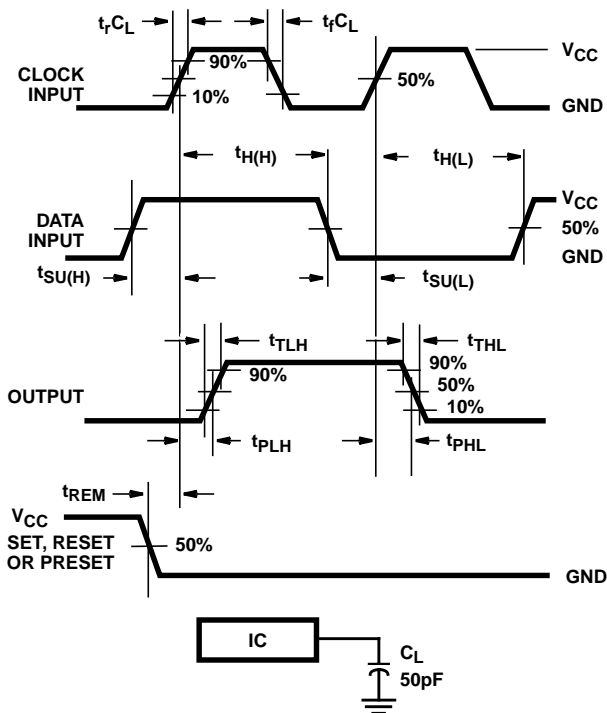


FIGURE 19. HC SETUP TIMES, HOLD TIMES, REMOVAL TIME, AND PROPAGATION DELAY TIMES FOR EDGE TRIGGERED SEQUENTIAL LOGIC CIRCUITS

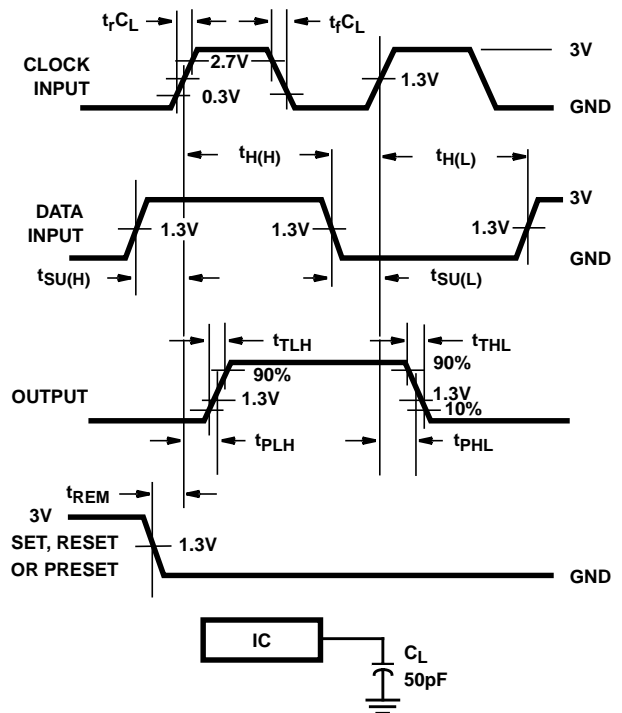


FIGURE 20. HCT SETUP TIMES, HOLD TIMES, REMOVAL TIME, AND PROPAGATION DELAY TIMES FOR EDGE TRIGGERED SEQUENTIAL LOGIC CIRCUITS

Test Circuits and Waveforms (Continued)

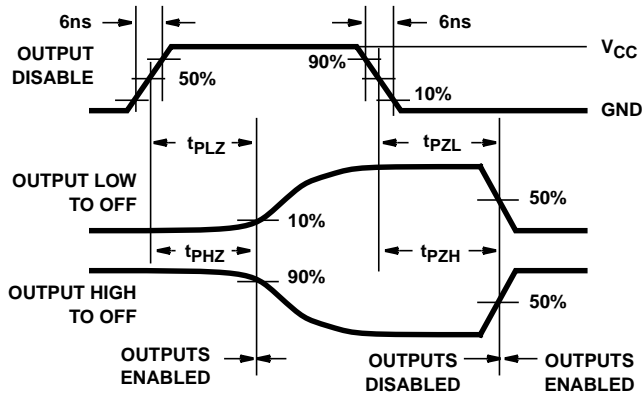


FIGURE 21. HC THREE-STATE PROPAGATION DELAY WAVEFORM


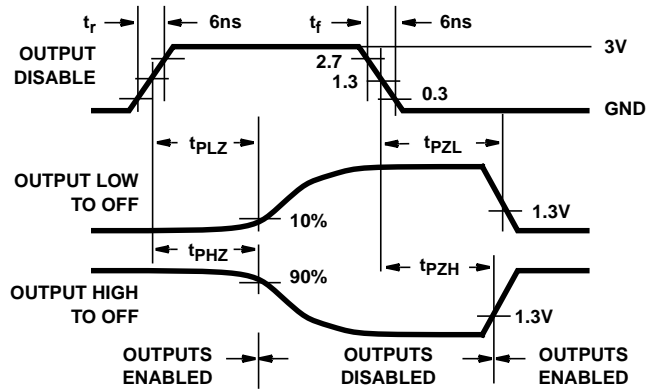


FIGURE 22. HCT THREE-STATE PROPAGATION DELAY WAVEFORM

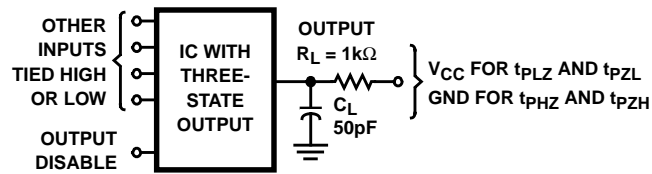

NOTE: Open drain waveforms t_{PLZ} and t_{PZL} are the same as those for three-state shown on the left. The test circuit is Output $R_L = 1k\Omega$ to V_{CC} , $C_L = 50pF$.

FIGURE 23. HC AND HCT THREE-STATE PROPAGATION DELAY TEST CIRCUIT

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| CD54HC4351F3A | ACTIVE | CDIP | J | 20 | 1 | TBD | Call TI | N / A for Pkg Type | -55 to 125 | CD54HC4351F3A | Samples |
| CD74HC4351E | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | NIPDAU | N / A for Pkg Type | -55 to 125 | CD74HC4351E | Samples |
| CD74HC4351EE4 | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | NIPDAU | N / A for Pkg Type | -55 to 125 | CD74HC4351E | Samples |
| CD74HC4351M | ACTIVE | SOIC | DW | 20 | 25 | Green (RoHS & no Sb/Br) | NIPDAU | Level-1-260C-UNLIM | -55 to 125 | HC4351M | Samples |
| CD74HC4351M96 | ACTIVE | SOIC | DW | 20 | 2000 | Green (RoHS & no Sb/Br) | NIPDAU | Level-1-260C-UNLIM | -55 to 125 | HC4351M | Samples |
| CD74HC4352E | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | NIPDAU | N / A for Pkg Type | -55 to 125 | CD74HC4352E | Samples |
| CD74HCT4351E | ACTIVE | PDIP | N | 20 | 20 | Pb-Free (RoHS) | NIPDAU | N / A for Pkg Type | -55 to 125 | CD74HCT4351E | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF CD54HC4351, CD74HC4351 :

- Catalog: [CD74HC4351](#)
- Military: [CD54HC4351](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

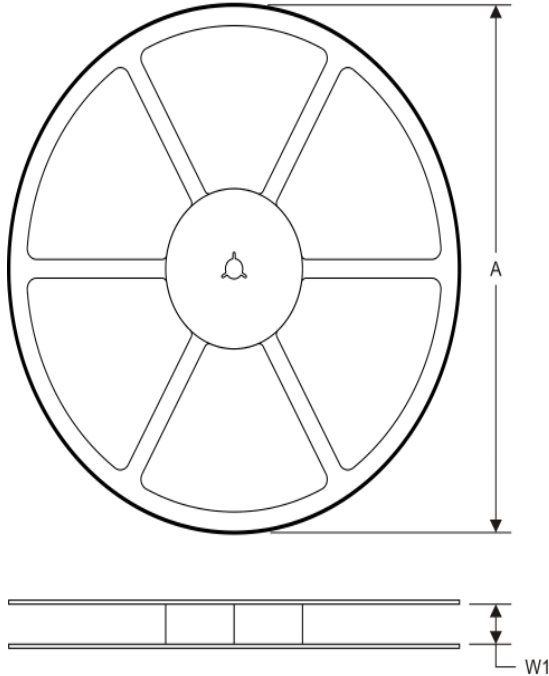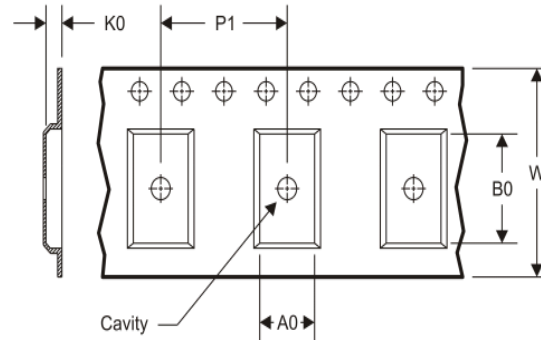TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


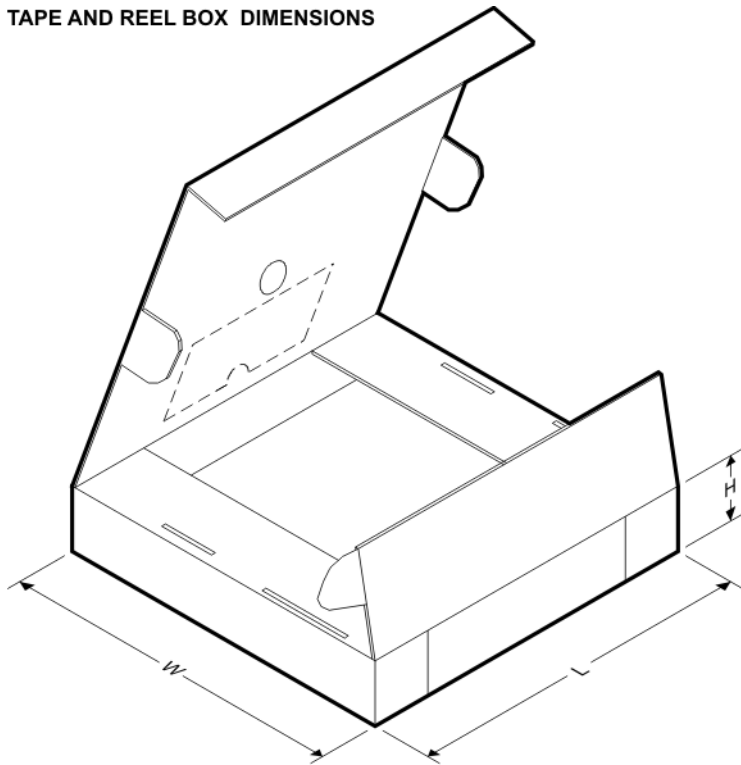
| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

TAPE AND REEL INFORMATION

*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CD74HC4351M96 | SOIC | DW | 20 | 2000 | 330.0 | 24.4 | 10.8 | 13.0 | 2.7 | 12.0 | 24.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| CD74HC4351M96 | SOIC | DW | 20 | 2000 | 367.0 | 367.0 | 45.0 |


J (R-GDIP-T**)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE

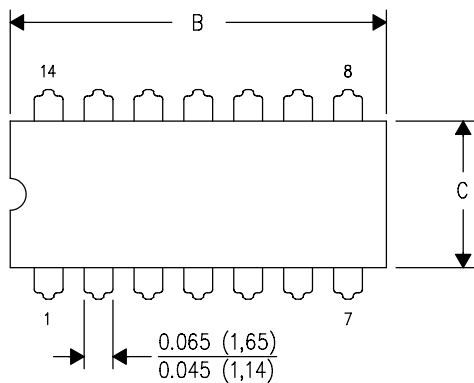

| DIM \ PINS ** | 14 | 16 | 18 | 20 |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A | 0.300 (7,62) BSC | 0.300 (7,62) BSC | 0.300 (7,62) BSC | 0.300 (7,62) BSC |
| B MAX | 0.785 (19,94) | .840 (21,34) | 0.960 (24,38) | 1.060 (26,92) |
| B MIN | — | — | — | — |
| C MAX | 0.300 (7,62) | 0.300 (7,62) | 0.310 (7,87) | 0.300 (7,62) |
| C MIN | 0.245 (6,22) | 0.245 (6,22) | 0.220 (5,59) | 0.245 (6,22) |

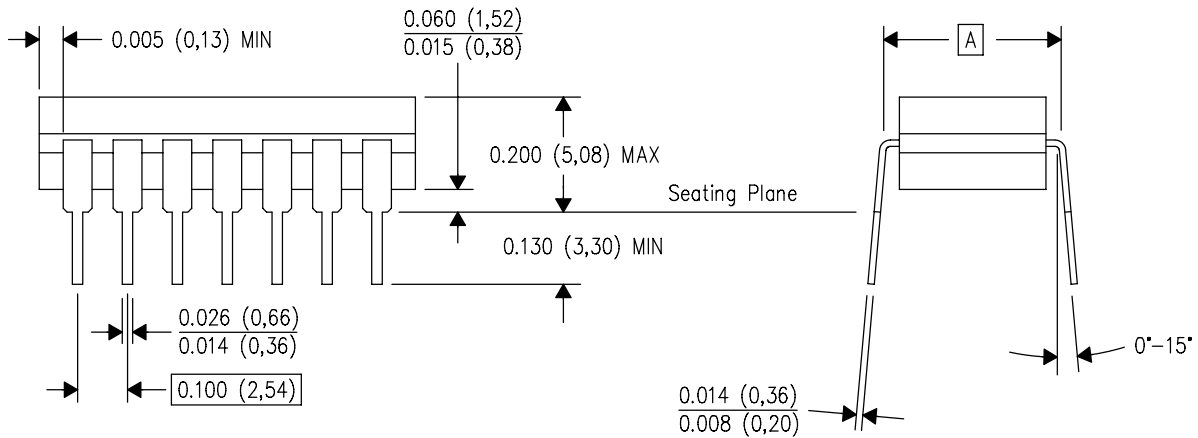


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. This package is hermetically sealed with a ceramic lid using glass frit.
 - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
 - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN

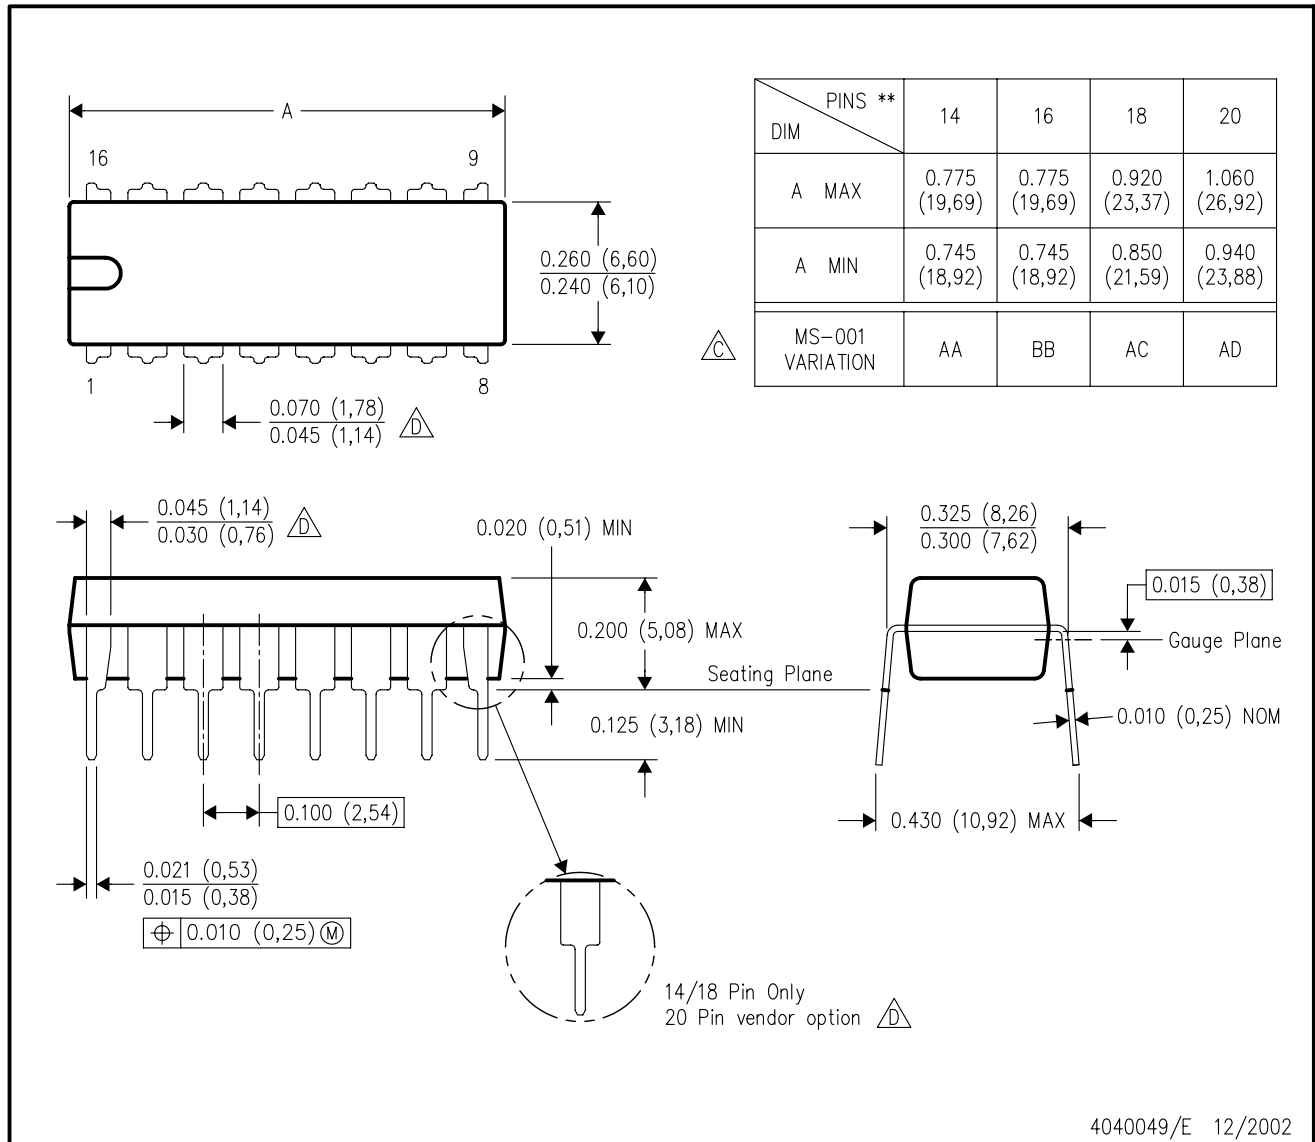

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
 - The 20 pin end lead shoulder width is a vendor option, either half or full width.


DW0020A



PACKAGE OUTLINE

SOIC - 2.65 mm max height

SOIC

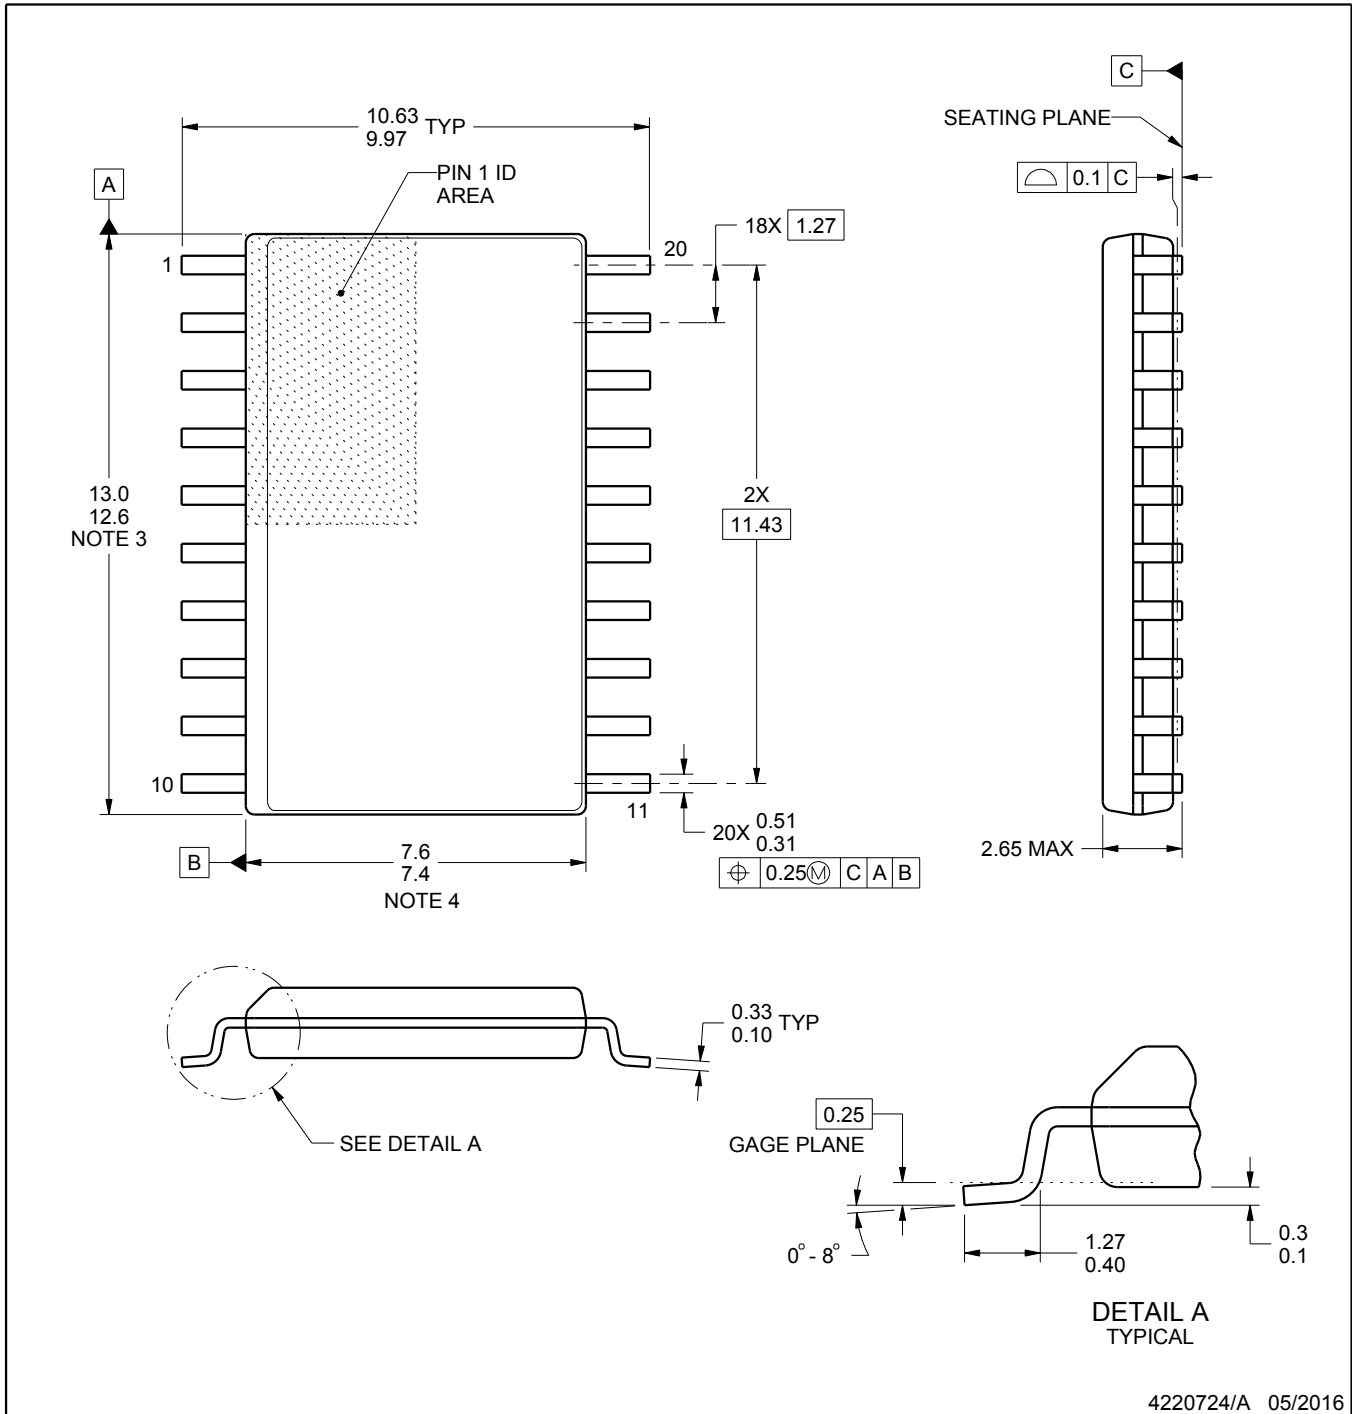

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
5. Reference JEDEC registration MS-013.

EXAMPLE BOARD LAYOUT


DW0020A

SOIC - 2.65 mm max height

SOIC

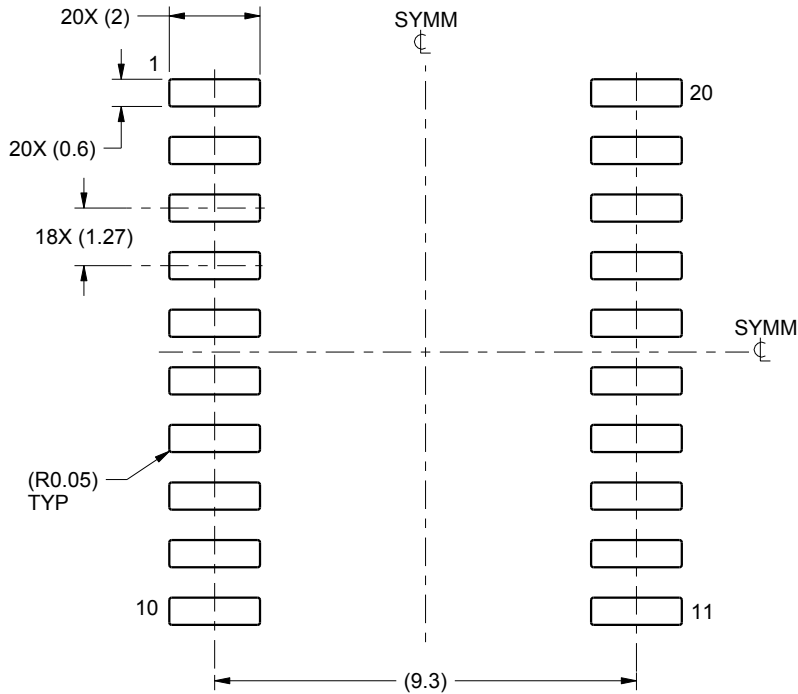

LAND PATTERN EXAMPLE
SCALE:6X

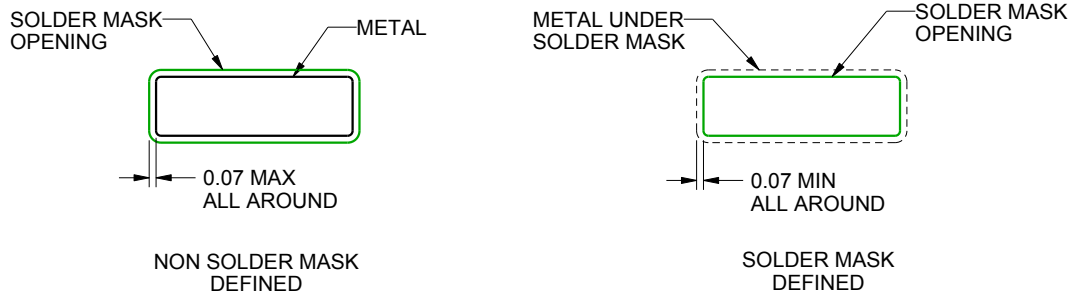

SOLDER MASK DETAILS

4220724/A 05/2016

NOTES: (continued)


- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DW0020A

SOIC - 2.65 mm max height

SOIC

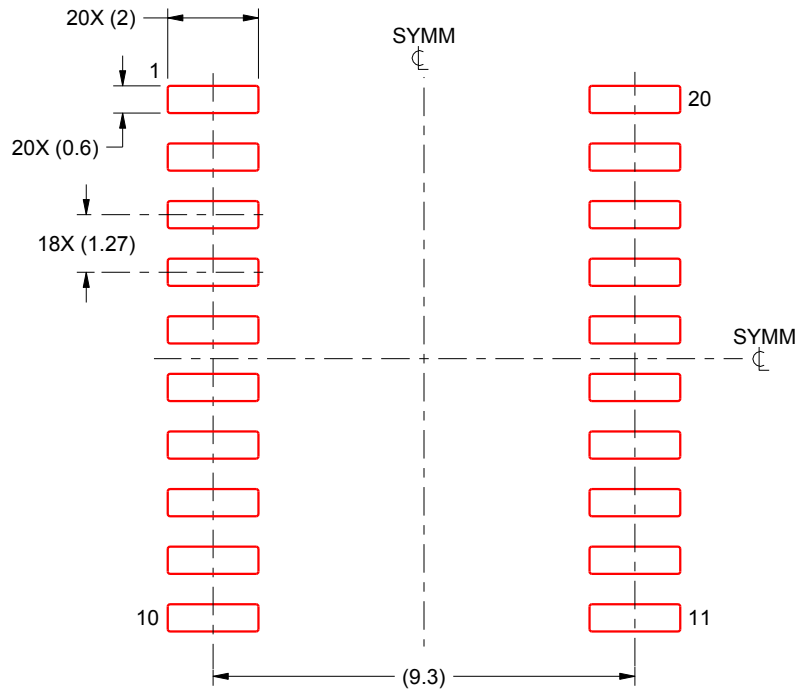

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:6X

4220724/A 05/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2020, Texas Instruments Incorporated