

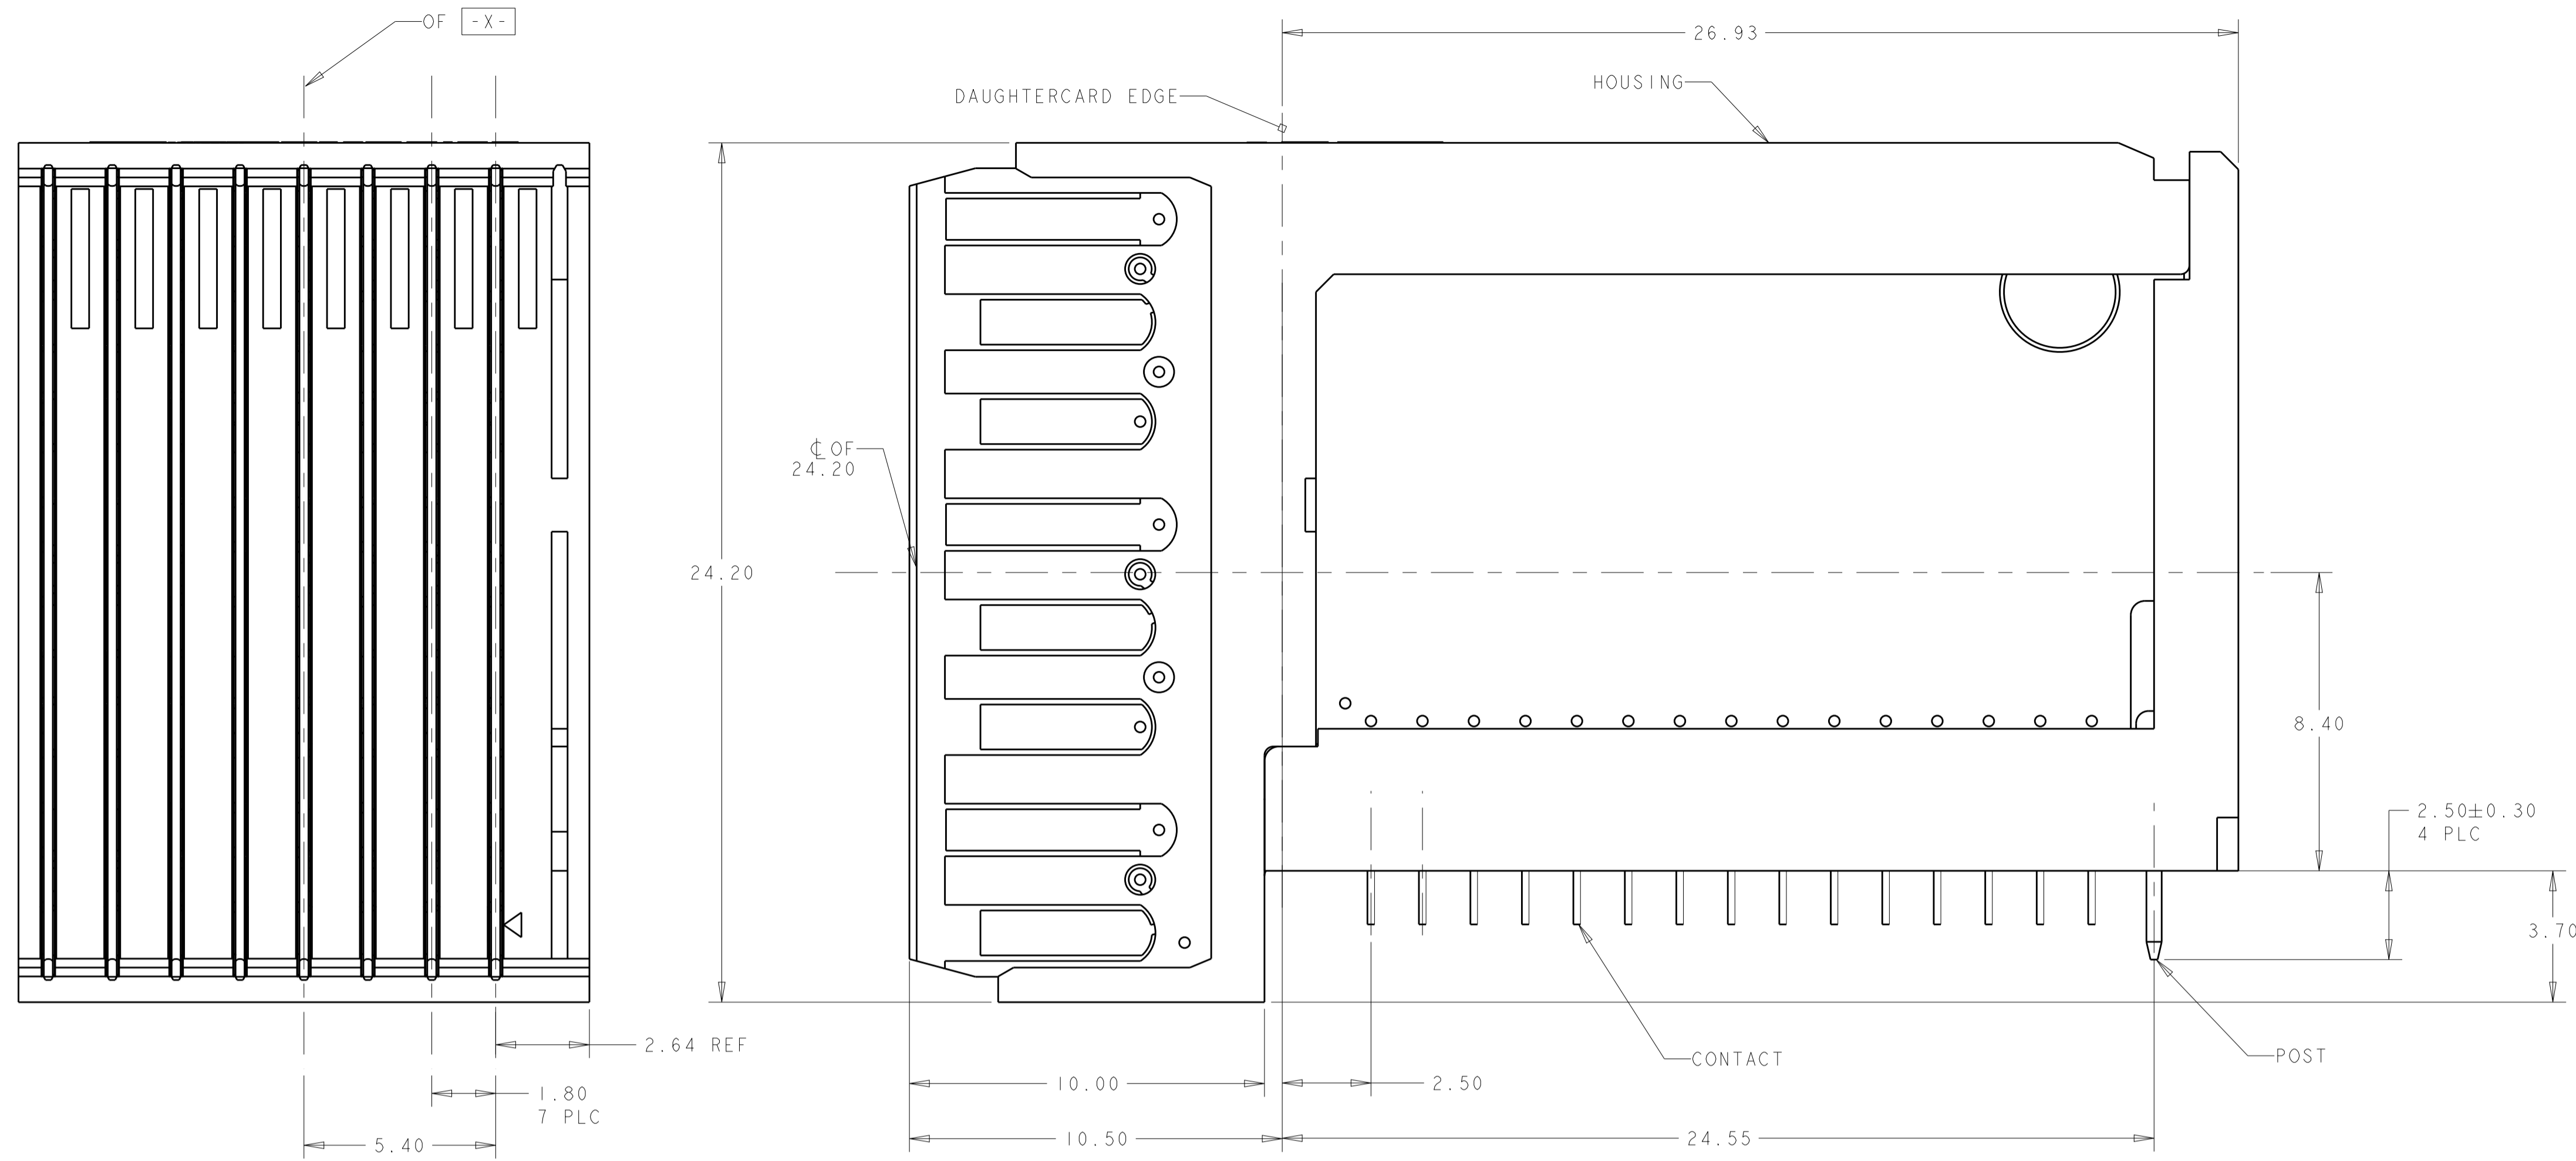


LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
AD	00	A2		REVISED PER ECO-12-011861	28JUN2012	KH	AS

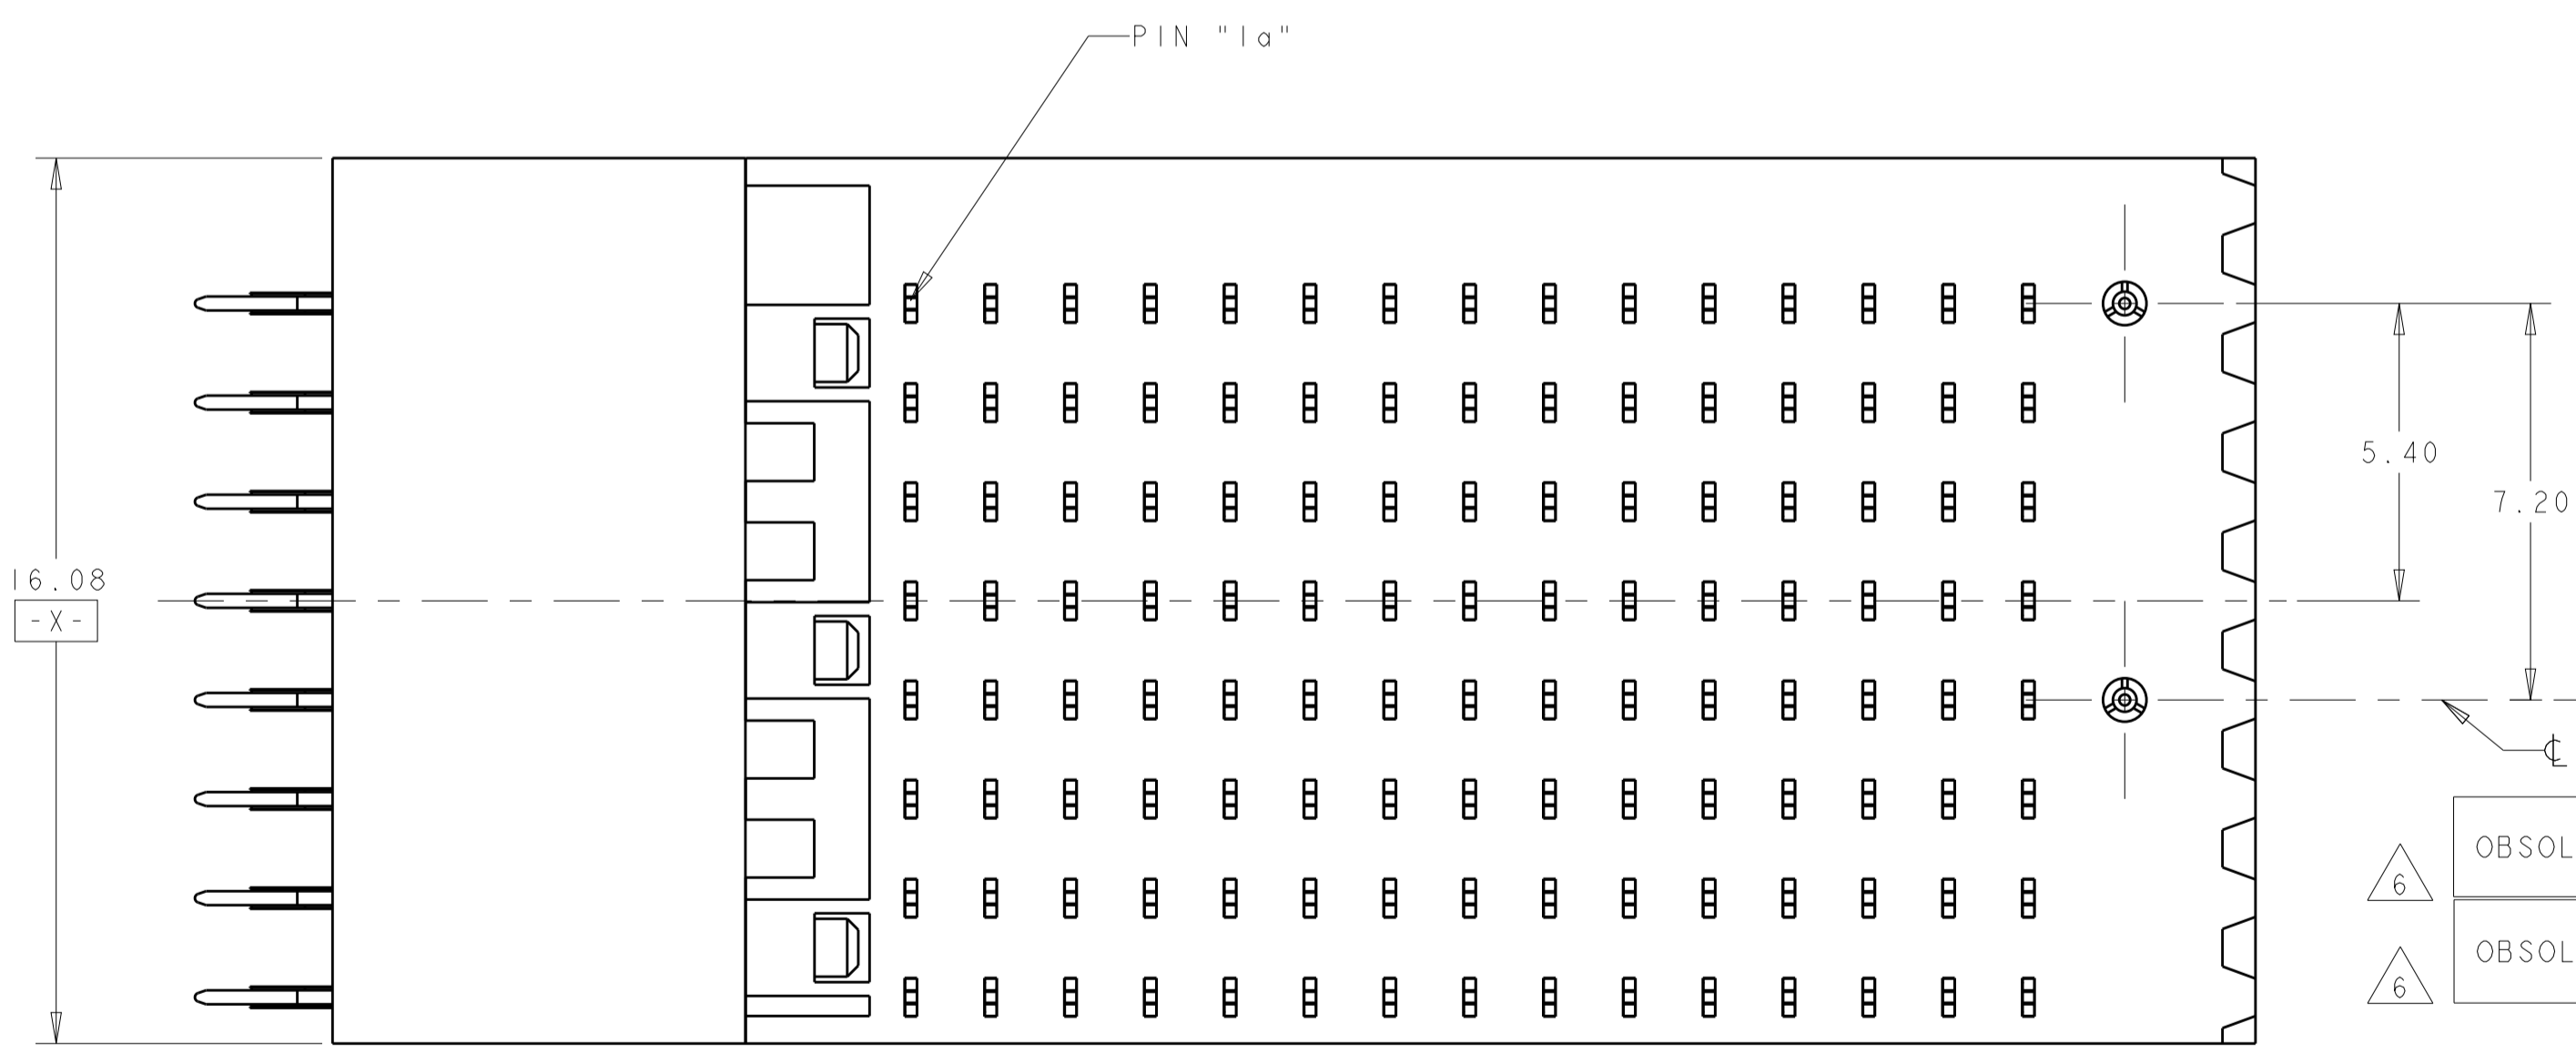

- 1 HOUSING: LCP, UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- 2 CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 μm MIN TIN-LEAD
ON PCB TAIL,
OVER 1.27 μm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST: 1.27 μm MIN NICKEL.
- 3 PLATED THROUGH HOLE PER 114-13056,
FIGURE 4.
- 4 CONTACT: 0.76 μm GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 μm MIN MATTE TIN PER ASTM B 545
ON PCB TAIL,
OVER 1.27 μm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST: 1.27 μm MIN NICKEL.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

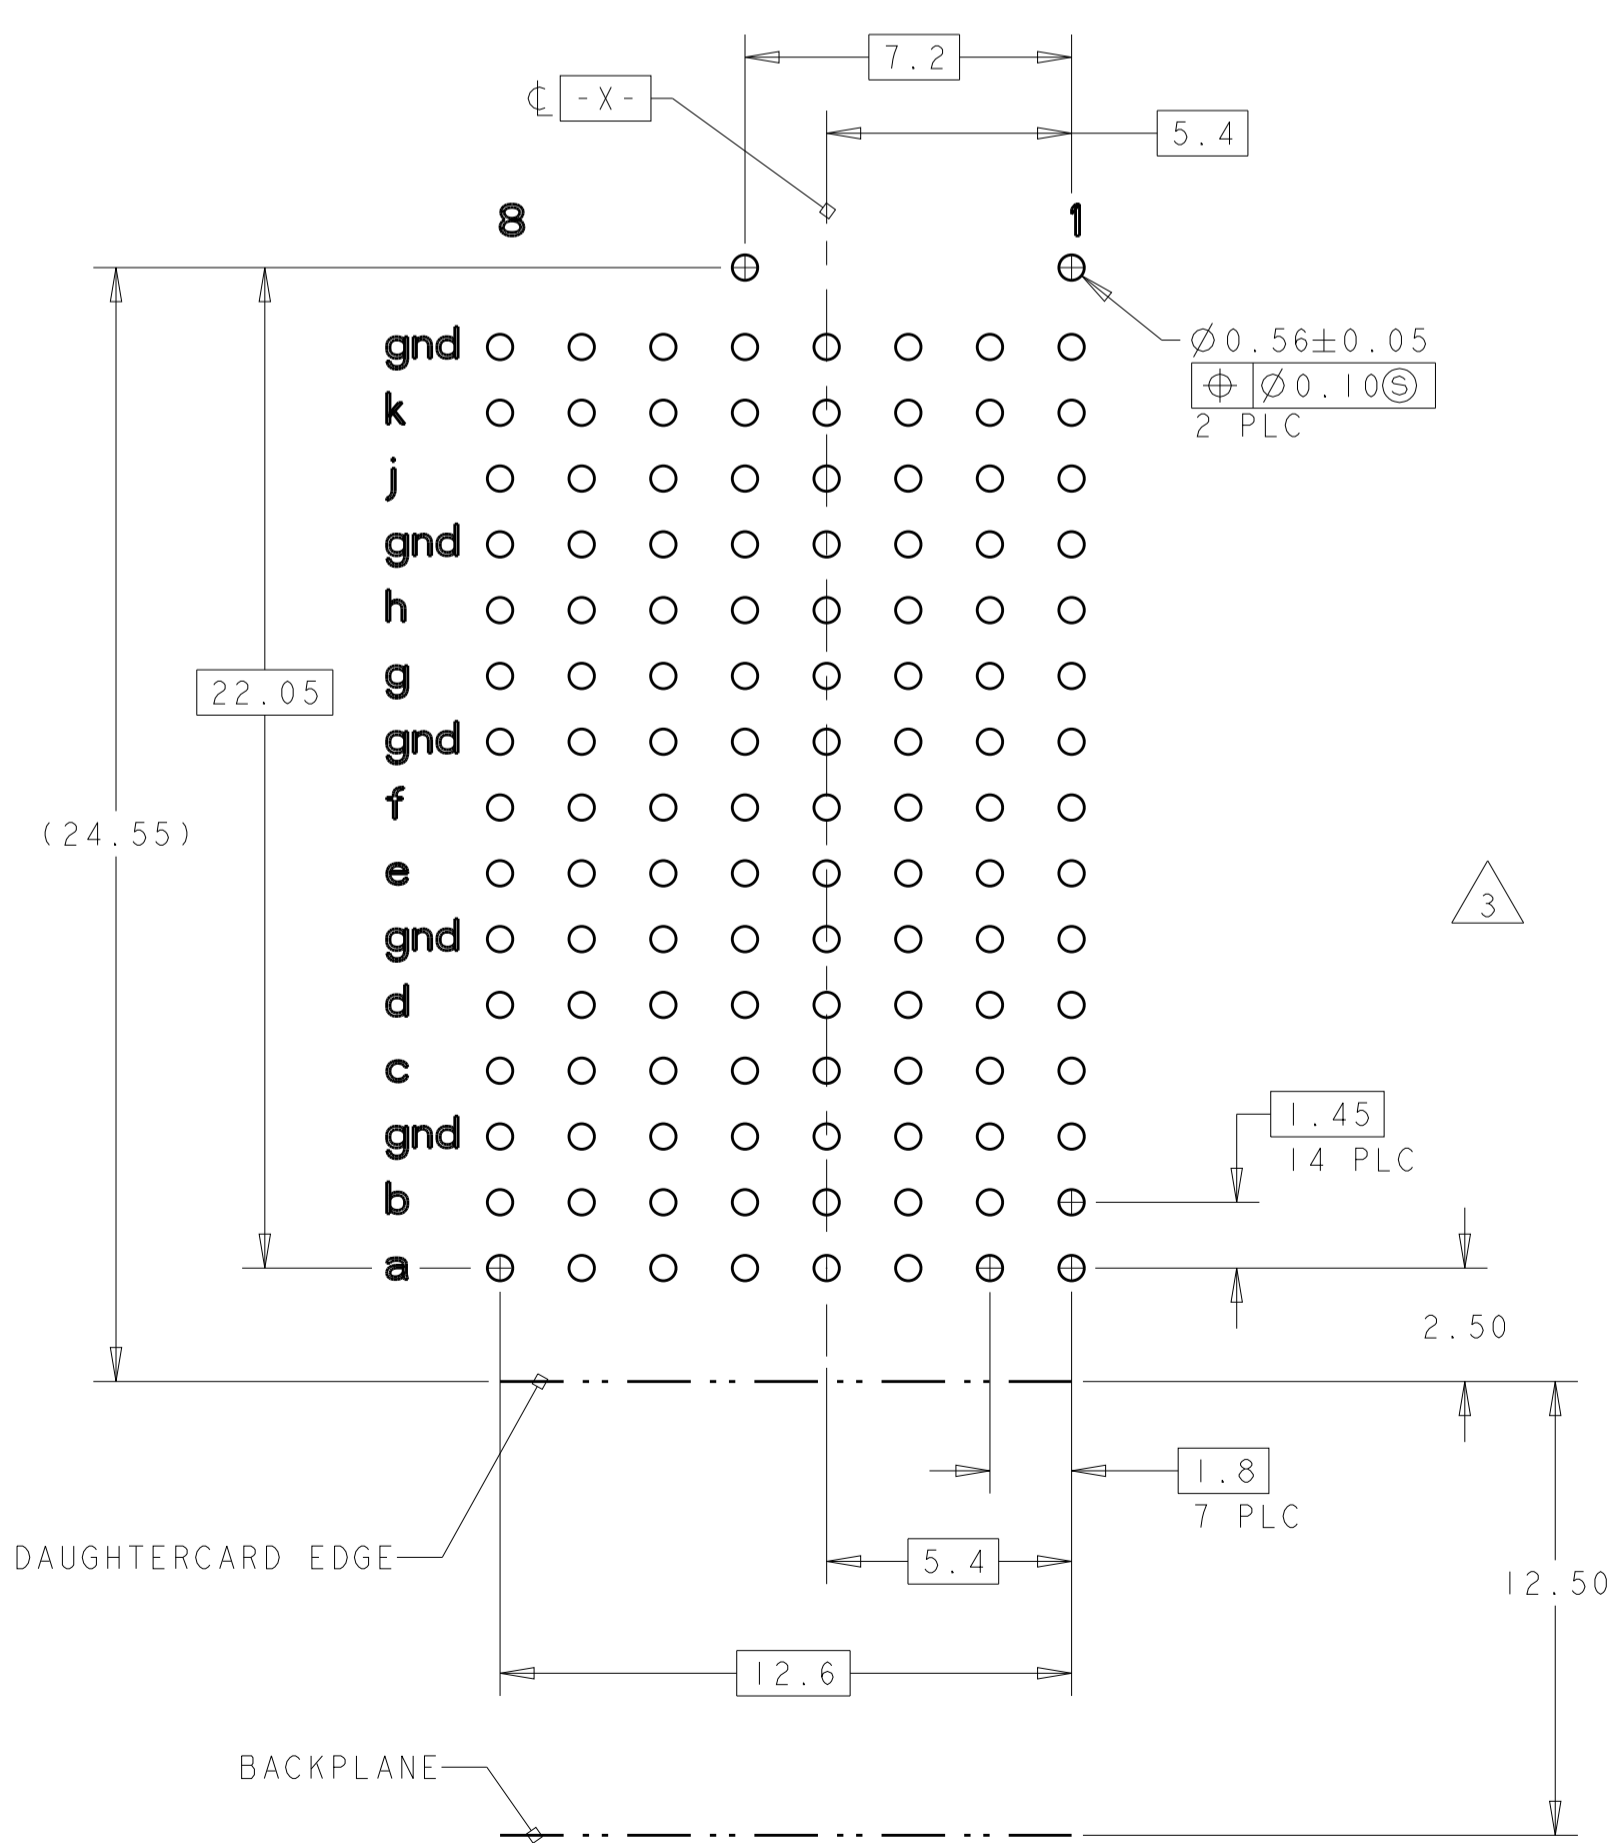

FINISH	DESCRIPTION	PART NUMBER
OBsolete	SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 1, GROUND LEVEL 2	1410232-6
OBsolete	DIFFERENTIAL PAIR, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410232-5
	SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410232-4
	SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 1, GROUND LEVEL 2	1410232-3
OBsolete	DIFFERENTIAL PAIR, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410232-2
	SINGLE ENDED, NONSEQUENTIAL SIGNAL LEVEL 2, GROUND LEVEL 3	1410232-1

PCB LAYOUT (CONNECTOR SIDE)
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±
 1 PLC ±0.13
 2 PLC ±0.013
 3 PLC ±0.013
 4 PLC ±
 ANGLES ° ±1°
 MATERIAL: FINISH:

DWN: M.E. CONHEP 28SEP2001
 CHK: D. DEBRAUGH 23OCT2001
 APVD: F.P. MORANA 23OCT2001
 PRODUCT SPEC: 108-2072
 APPLICATION SPEC: 114-13056
 WEIGHT: -
 CUSTOMER DRAWING

STE TE Connectivity
 NAME: RIGHT ANGLE, PLUG ASSEMBLY, LEFT END HALF, 25.4mm, MultiGig RT 1, DAUGHTERCARD CONNECTOR
 SIZE: A100779
 DRAWING NO: 1410232
 SCALE: 8:1 SHEET 1 OF 1 REV: A2