



used for: DIN EN 60603-2 TYPE "C 1/2"

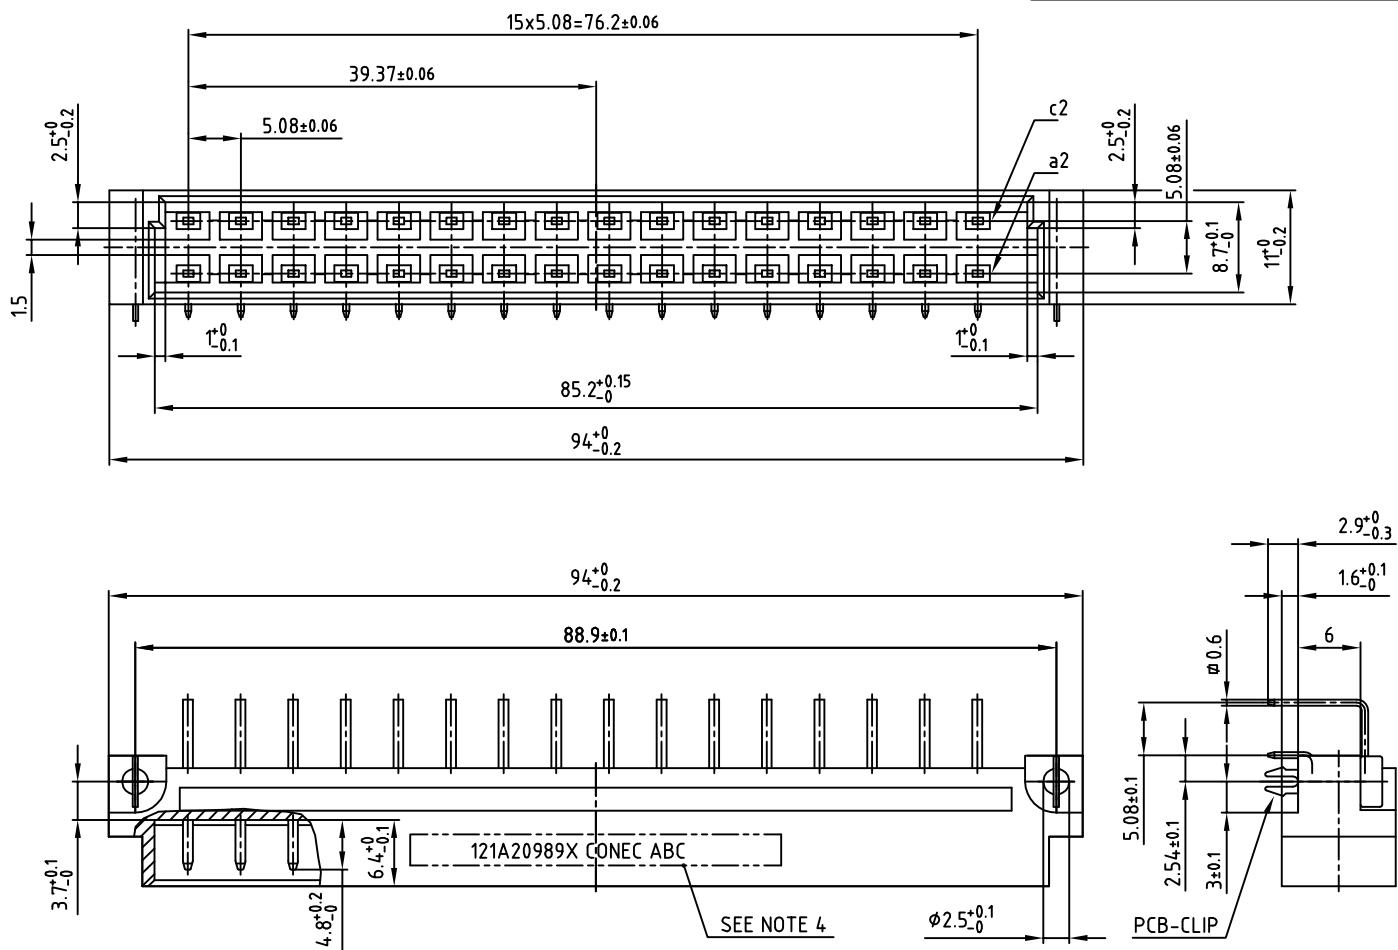

NOTES:

- INSULATORS: PBT GF UL 94 V-0, GREY
- CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
- PCB-CLIPS: COPPER ALLOY
PCB HOLE $\phi 2.8 \pm 0.1$ / PCB THICKNESS $t = 1.6$ mm
- CONNECTOR IS PART MARKED: 121A20989X CONEC ABC

P.C.B.-HOLE DRILLINGS

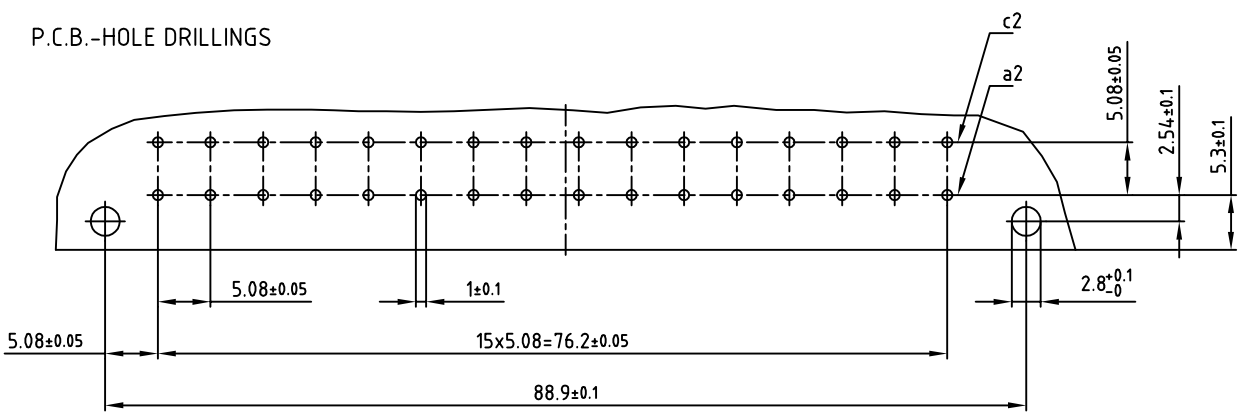

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

tolerance		dim. in mm
2011	date	
drawn	28.03.	Henneboel
appd.	28.03.	Mickenbecker
norm	DIN EN 60603-2	
d-old		

scale:	2:1
material:	SEE NOTES
title:	MALE CONNECTOR TYPE "D" 32pos. ANGLED with clip
dwg no:	12K1A722
part no:	121A20989X

DIN-A
3
sh:1/1

