


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECR-22-135208	16JUN2022	GK	SCD

NOTE:

- 1 RANGE: $\phi 45$ MAX.
- 2 MIN. TENSILE STRENGTH 220N.

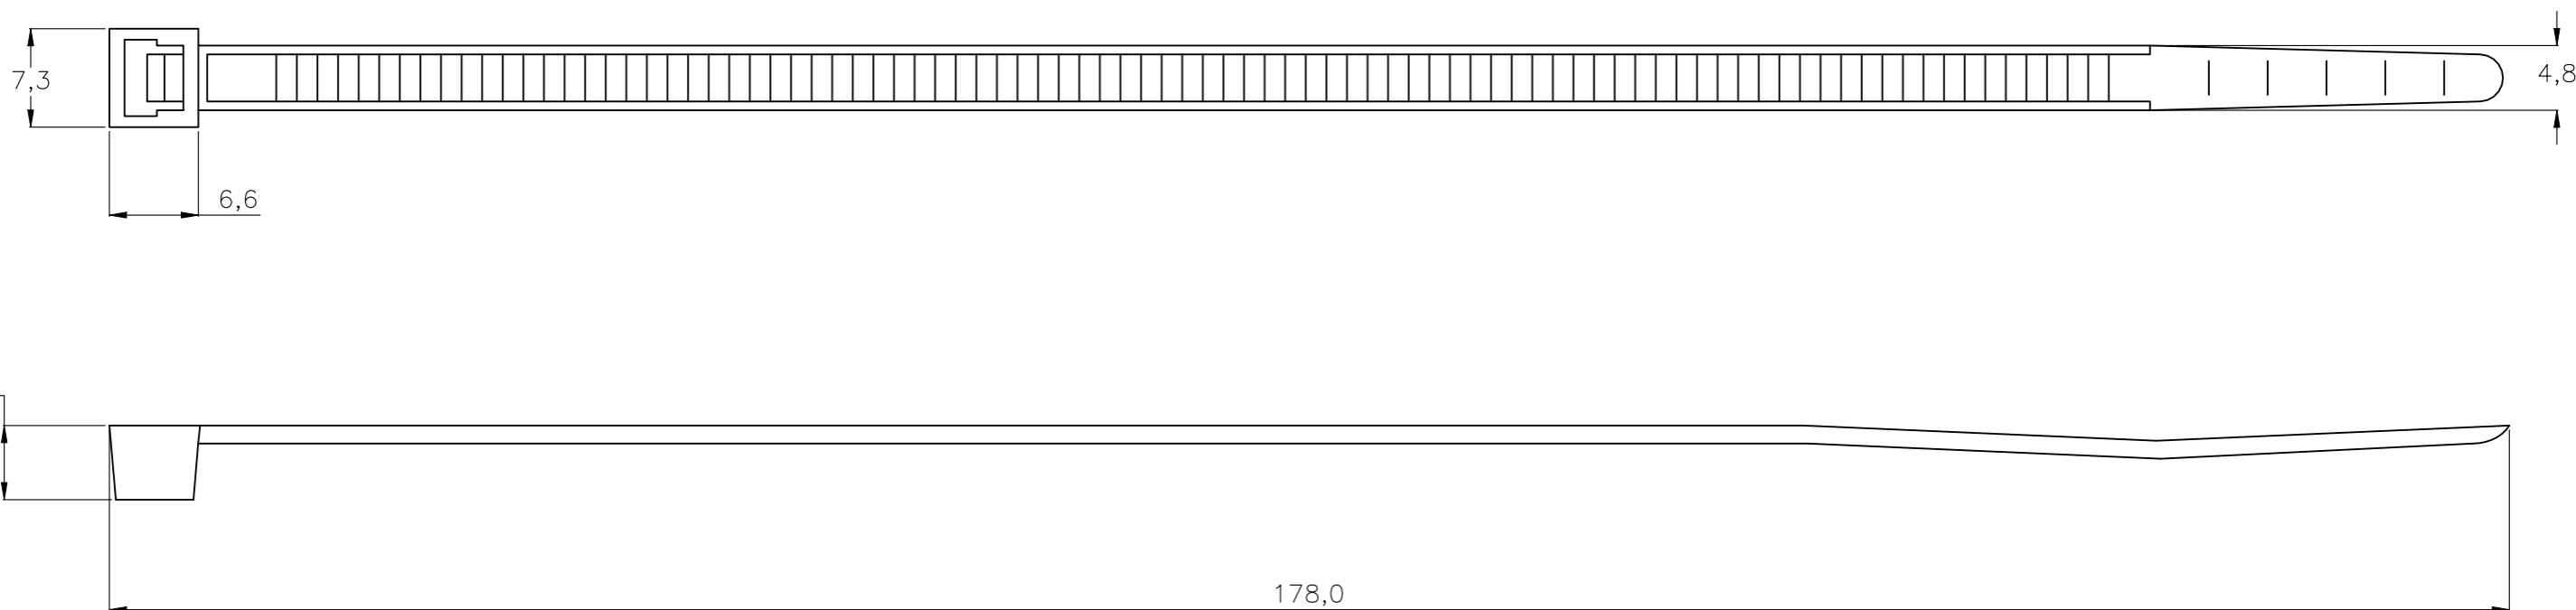

SUPERSEDED BY 2-160974-2	1000	BLACK	POLYAMIDE 6.6	4-160974-2
SUPERSEDED BY 2-160974-2	1000	NATURAL	POLYAMIDE 6.6	4-160974-1
	100	BLACK	POLYAMIDE 6.6	2-160974-2
OBSOLETE	100	NATURAL	POLYAMIDE 6.6	2-160974-1
	QTY	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.V.D.HEIJDEN 27FEB92	STE TE Connectivity		
DIMENSIONS: mm		CHK R.VOS			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V.SOEST	NAME		
0 PLC ± -		PRODUCT SPEC	CABLE TIE		
1 PLC ± -		APPLICATION SPEC	RESTRICTED TO		
2 PLC ± -		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-160974
3 PLC ± -		CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1	REV B3
4 PLC ± -					
ANGLES ± -					
FINISH					
MATERIAL					