
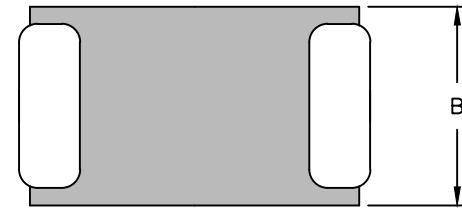



# MGV201610R33M-10

## PHYSICAL DIMENSIONS:


A	2.00	±	0.20
B	1.60	±	0.20
C	1.00		Max.
D	0.50	±	0.30

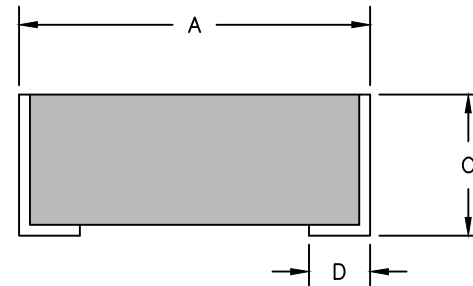

## LAND PATTERNS FOR REFLOW SOLDERING



RoHS

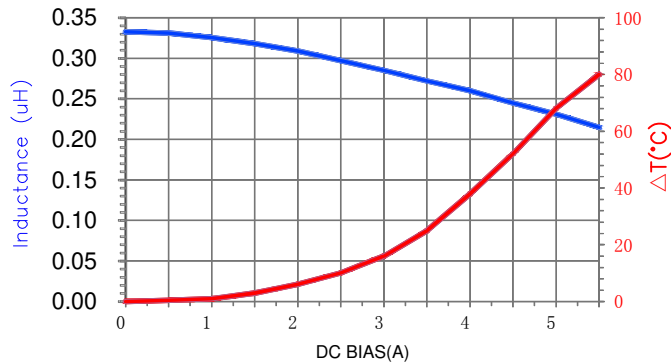

## ELECTRICAL SPECIFICATION @ 25°C

	Min	Norm	Max
INDUCTANCE (uH) L @ 1MHz/1mA ±20%	0.264	0.33	0.396
DCR (Ω)		0.024	0.029
Saturation Current Isat (A)		5.00	4.50
Heating Current Irms (A)		4.10	3.69

## NOTES:

1. OPERATING TEMPERATURE RANGE:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  .
2. STORAGE TEMPERATURE RANGE:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  .
3. Isat MEANS THAT MAX DC CURRENT WILL CAUSE APPROXIMATELY 30% INDUCTANCE REDUCTION FROM INITIAL VALUE.
4. Irms MEANS THAT MAX DC CURRENT WILL CAUSE COIL TEMPERATURE RISE APPROXIMATELY  $40^{\circ}\text{C}$  AT AMBIENT  $25 \pm 5^{\circ}\text{C}$ .

DIMENSIONS ARE IN mm.				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.							
PROJECT/PART NUMBER:				MGV201610R33M-10		REV	A	PART TYPE:	CHOKE INDUCTOR	DRAWN BY:	QIU
DATE:				06/13/17		SCALE:	NTS	SHEET:			
REV				DESCRIPTION		DATE		INT		TOOL #	
A				ORIGINAL DRAFT		06/13/17		QIU		CAD #	
				MGV201610R33M-10-A				TOOL #		-	
										1 of 1	

Laird