





Drawing No.	*Rev.	Date	Page
BF3H50G-ONH-020mA	A	2015/05/14	1/3

APPROVAL SHEET

Part No:

BF3H50G-ONH-020mA

NOTE : Green Part


MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				

Prepared	Checked	Approved
Rachel Lee	Sky Lin	Kenneth Wu

LED LAMP Technical Data

DESCRIPTION:

Device Type	: BF3H50G-ONH-020mA
Dice Material	: AlGaInP/GaAs
Light Color	: Orange
Lens Color	: Orange Diffused
Lens Dimension	: 3mm

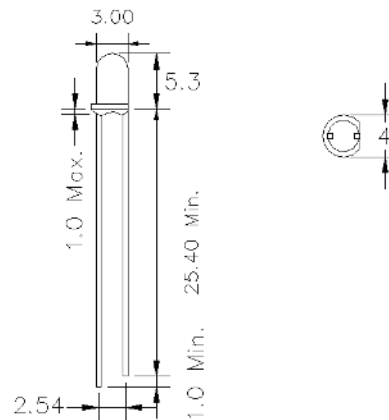

Absolute Maximum Ratings at Ta=25°C

Parameter	Max.	Unit
DC Forward Current	20	mA
Reverse Voltage	5	V
Power Dissipation	45	mW
Operating Temperature	Topr : -30 ~ +80	°C
Storage Temperature	Tstr : -30 ~ +100	°C
Solder DIP (MAX. 5 seconds, 1.6mm from body) Temperature 240°C		


Electrical and Optical Characteristics at Ta=25°C

Symbol	Description	Test Condition	Min.	Typ.	Max.	Unit
V _F	Forward Voltage	I _F = 20mA		2.3	2.5	V
I _R	Reverse Current	V _R = 5V	-	-	10	μA
λ _D	Dom. Emission Wavelength	I _F = 20mA		605		nm
Δλ	Spectral Line Halfwidth	I _F = 20mA	-	20		nm
2θ _{1/2}	Viewing Angle	I _F = 20mA		50		Deg.
I _v	Luminous Intensity	I _F = 20mA	275		570	mcd


- Note:
- 1.The lead should be formed up to 5mm from the body of device without forming stress.
 2. Soldering shall be performed after lead forming.
 3. All dimensions are in millimeters

LED LAMP Technical Data


Typical Optical-Electrical Characteristic Curves

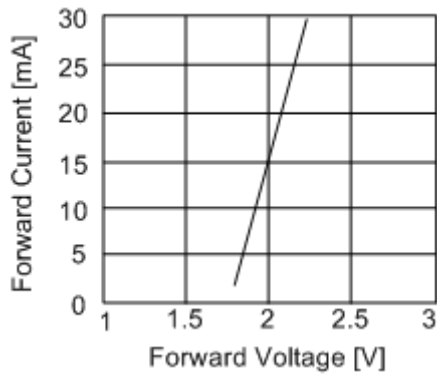


**Forward Current
Vs. Forward Voltage**

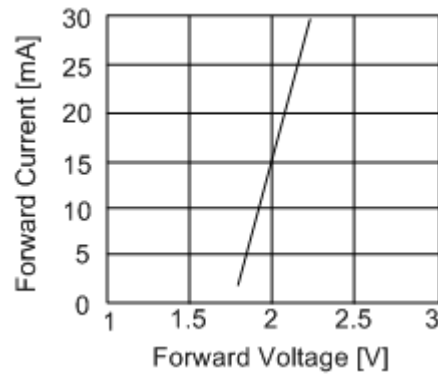


**Luminous Intensity
Vs. Forward Current**

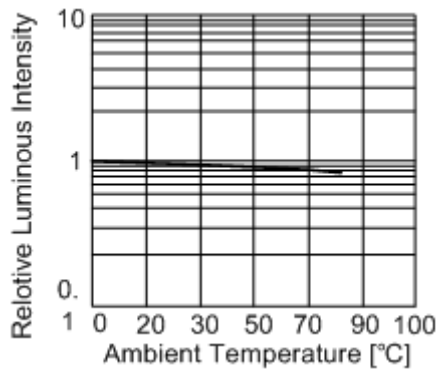


**Luminous Intensity
Vs. Ambient Temperature**

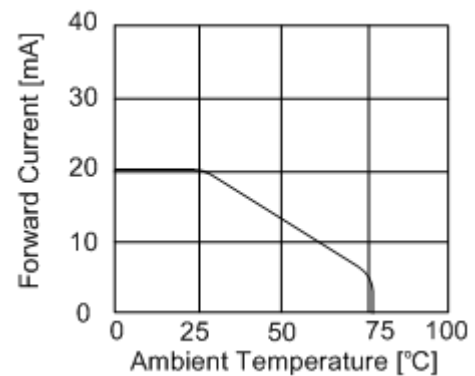

**Forward Current
Vs. Ambient Temperature**

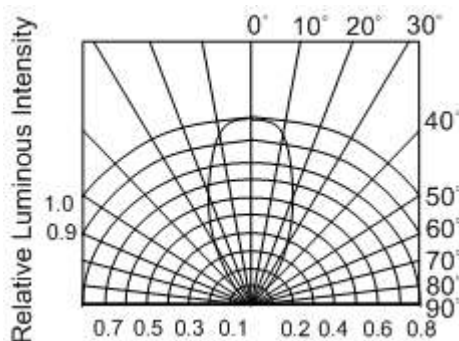

Radiation Pattern

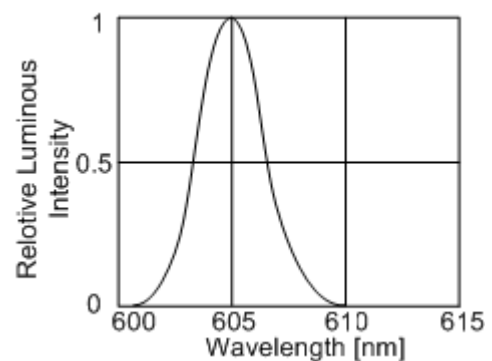

**Relative Luminous Intensity
Vs. Wavelength**