

т	۵	п	m	0



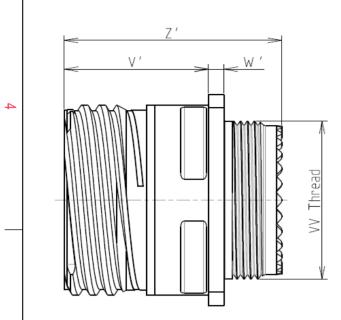



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 2000 hours		

: 10.2 g ± 10%

8D 0

G

11

J

05

А

F

D

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-05

SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend

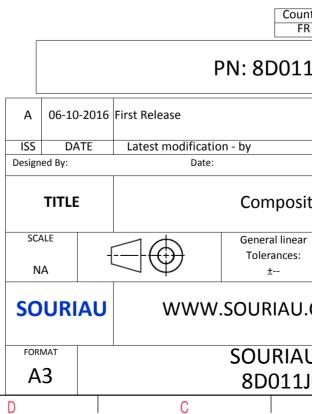

	4			
	4			
	4			
	3			
S EXAMPLE	v			
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)				
Intry Jurisdiction & Control List R Not Listed	2			
1J05AD				
MOD N°				
CUSTOMER DRAWING				
ite Receptacle 8D series				
NPRDS / PROJECT 859				
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
Communicated without permission SHEET				
communicated without permission				

	τ	۵	н П	m	D	0
		Contact Layout				Panel Cutou
4	-x	$ \begin{array}{c} \bullet \\ \bullet $				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	size ^{no.} con	Jon (mm) X-axis (mm) Y-axis (mm) +.065 (1.65) +.056 (1.42) +.113 (2.87) 065 (1.65) +.000 (0.00) 130 (3.30) 113 (2.87) 065 (1.65) 065 (1.65) +.056 (1.42) ber of Size contacts Service rating Contact location Supersedes]		č	
ယ	11 -5	5 20 I Ali MS20050-5				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N					[Countr FR
						PN: 8D011J
						0-2016 First Release ATE Latest modification - by
					Designed By:	Date:
					SCALE	E Composite General linear
_					NA	Tolerances:
					SOUR	AU WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011J0
	Н	G	F	E	D	C

