

SC:0.10

PART NUMBER	SML-LXF0805SIC-TR	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
3.14.03	E.C.N. #10967.		Α
2.14.05	E.C.N. #11148.		В


ELECTRO-OPTICAL CHARACTERISTICS TA = 25°C



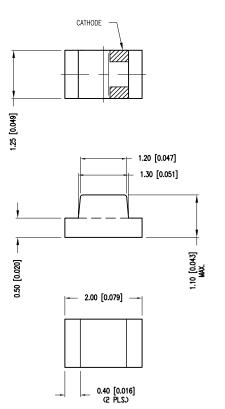



LEAD FREE REFLOW PROFILE 10 SEC. MAX.



TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		636		nm	
FORWARD VOLTAGE		2.0	2.6	$V_{f}$	
REVERSE VOLTAGE	5.0			$V_{\Gamma}$	$I_r = 100uA$
AXIAL INTENSITY		70		mcd	I <sub>f</sub> =20mA
VIEWING ANGLE		120		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	WATER	CLEAR LENS			
LIMITS OF SAFE OPERA	TION AT 25	5°C			


LIMITS OF SAFE OPERATION AT 25°C						
PARAMETER	MAX	UNITS				
PEAK FORWARD CURRENT*	200	mA				
STEADY CURRENT	30	mA				
POWER DISSIPATION	110	mW				
DERATE FROM 25°C	-1.2	mW/*C				
OPERATING TEMP.	-40 TO +85	*C				
STORAGE TEMP.	-40 TO +85	*C				


\* t<10uS

## NOTES:

1. THE POLARITY MARK IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: MOISTURE SENSITIVE DEVICE PER JEDEC LEVEL 4 STANDARDS

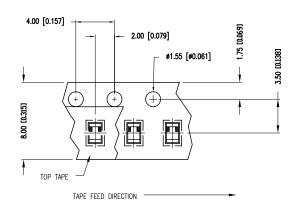



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

2.0mm x 1.25mm SURFACE MOUNT LED, 636nm SUPER HIGH INTENSITY RED LED, WATER CLEAR LENS.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONTROLING. INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICAL AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 01.12.01 DRAWN BY: ВC PAGE: 1 OF CHKD BY: SCALE: N/A APRVD BY: mm [INCH] (Pb) UNIT: