
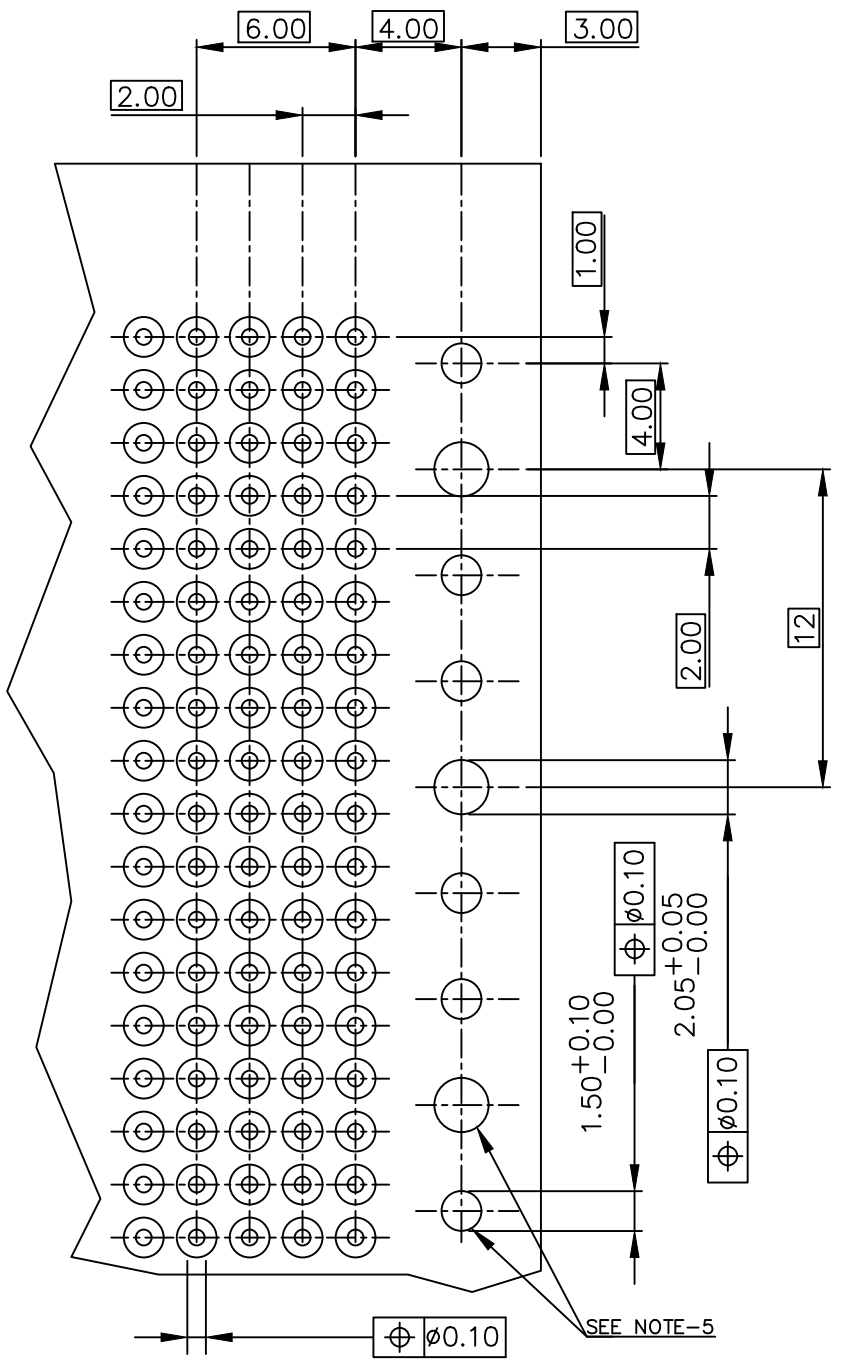
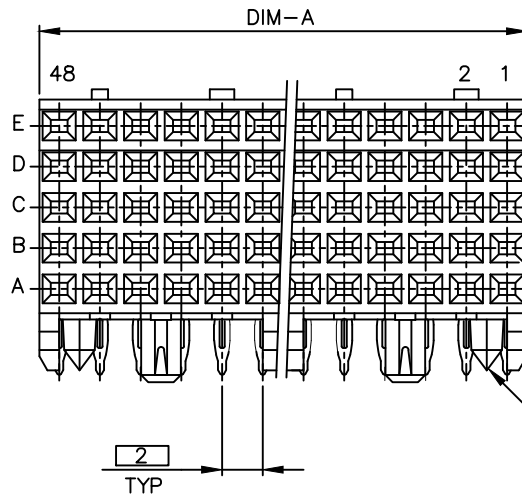



PRODUCT NUMBER	NO. OF MODULES	NO. OF POSITIONS	DIM A	LOADING CONFIGURATION
10022898-X001LF	2	60	23.95	FULLY LOADED
10022898-X002LF	3	90	35.95	
10022898-X003LF	6	180	71.95	
10022898-X004LF	8	240	95.95	
10022898-X005LF	1	30	11.95	

REFER NOTE-2  
10022898-XYYYLF

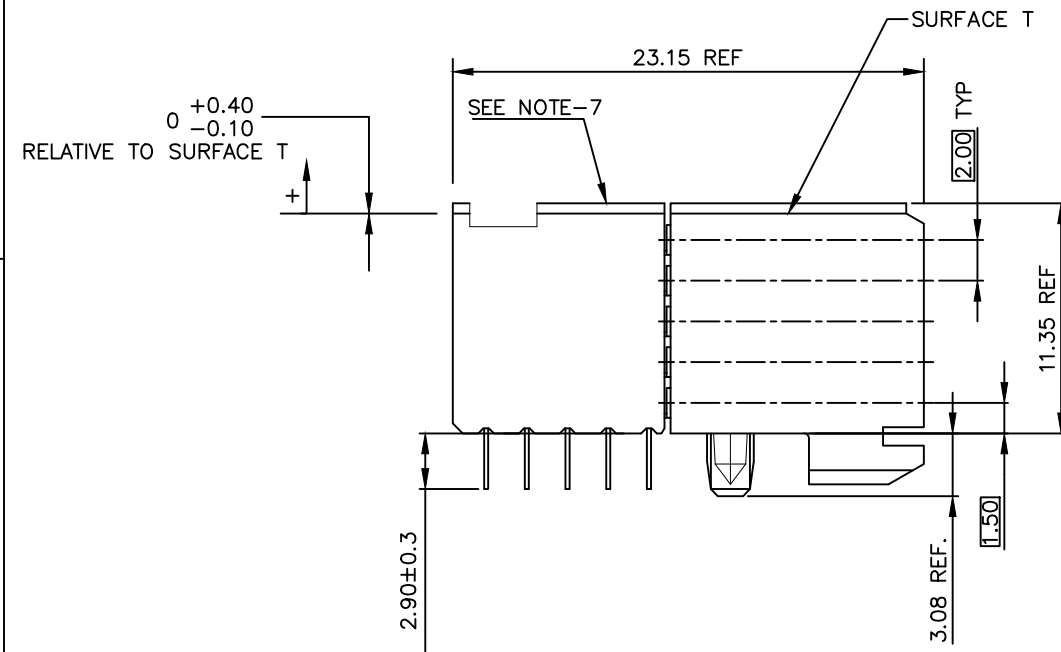

RECOMMENDED PC BOARD LAYOUT,  
COMPONENT SIDE.

FOR PTH DIMENSIONS REFER DRAWING NO : 58351.

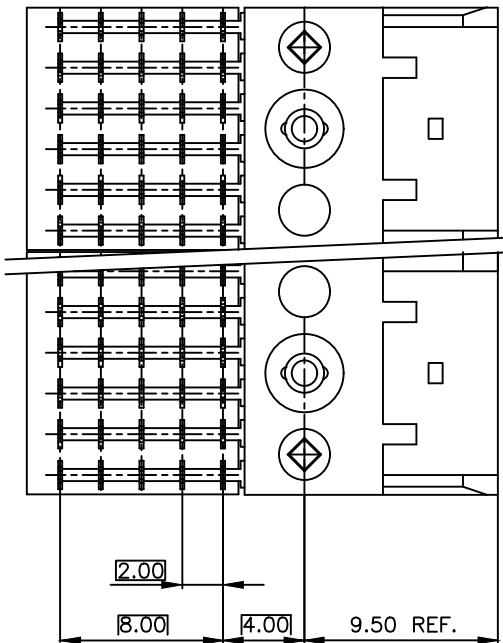

NOTES:

- MATERIAL : BODY : LCP UL94-V0  
: CONTACT : COPPER ALLOY.  
: PRESS BLOCK : GF, HIGH TEMPERATURE RESIN UL 94-V0 COMPLIANT
- FOR PLATING PERFORMANCE REFER DRAWING # 101594.08  $\Delta$
- PRODUCT SPECIFICATION : GS-12-002
- APPLICATION SPECIFICATIONS : BUS-20-061 , GS-20-001,TA-941
- INDICATED HOLES ARE UNPLATED
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
- TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING.  
THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 240°C FOR 60 SECONDS BIN A CONVECTION, INFAR-RED OR VAPOR PHASE REFLOW OVEN.
- $\Delta$  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

Amphenol  
FCi

© 2016 AFCI

mat'l. code				surface	tolerance	projection	product family	
				ISO 1302	ISO 406 ISO 1101		METRAL	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title	
E	DG08-0171	TER	2008-08-26	angles	.X±0.3			
F	DG09-0068	CENH	2009-06-06	linear	.XX±0.13			
G	ELX-I-38915	MINI	2020-10-27	0°±2°	.XXX±0.050			
				dr	T. BRUNGARD	2003-02-12	B SERIES R/A SIGNAL RECEPT ASSY, 5 ROW, PF, SPECIAL PLATING	
				enr	ALEX BABU	2020-10-27		
				chr	ARUN	2020-10-27		
				appd	SANOJ	2020-10-27		
sheet index		revision sheet	G 1				Amphenol FCi	dwg no
								sheet 1 of 1
								size
								A3
								type
								Product Customer Drawing