

## CDBQR0240LR-HF

**Io = 200 mA**  
**VR = 40 Volts**  
**RoHS Device**  
**Halogen Free**




### Features

- Low reverse current, low forward voltage.
- Designed for mounting on small surface.
- Extremely thin/leadless package.
- Majority carrier conduction.

### Mechanical data

- Case: 0402/SOD-923F standard package, molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes cathode end.
- Mounting position: Any.
- Weight: 0.001 grams (approx.).

### Circuit Diagram

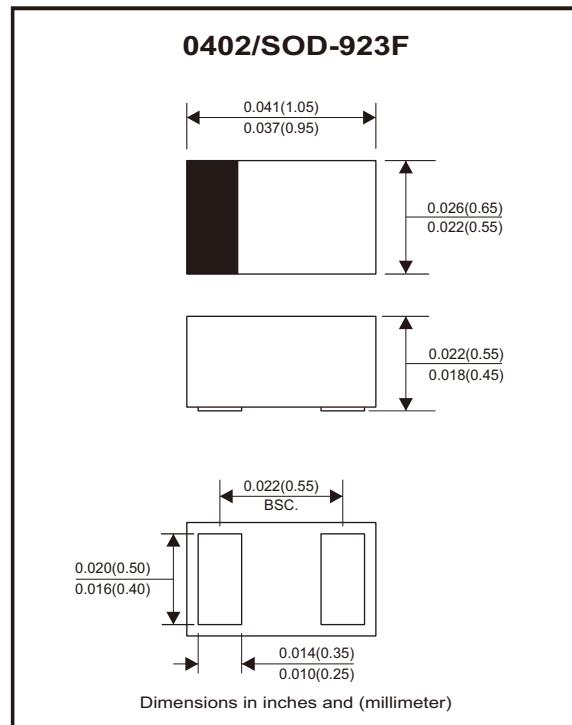

### Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Repetitive peak reverse voltage		V <sub>RRM</sub>			40	V
Reverse voltage		V <sub>R</sub>			40	V
Average forward rectified current		I <sub>o</sub>			200	mA
Forward current, surge peak	8.3 ms single half sine-wave superimposed on rate load (JEDEC method) * 1cycle	I <sub>FSM</sub>			3	A
Power dissipation		P <sub>D</sub>			320	mW
Thermal resistance junction to ambient		R <sub>θJA</sub>			310	°C/W
Operating temperature range		T <sub>J</sub>	-40		+125	°C
Storage temperature range		T <sub>STG</sub>	-40		+125	°C

### Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	I <sub>F</sub> = 100mA	V <sub>F</sub>			0.48	V
	I <sub>F</sub> = 200mA	V <sub>F</sub>			0.58	V
Reverse current	V <sub>R</sub> = 40V	I <sub>R</sub>			5	µA
Capacitance	f = 1MHz, and 1 VDC reverse voltage	C <sub>T</sub>		25	35	pF

## Rating and Characteristic Curves (CDBQR0240LR-HF)

Fig.1 - Forward Characteristics

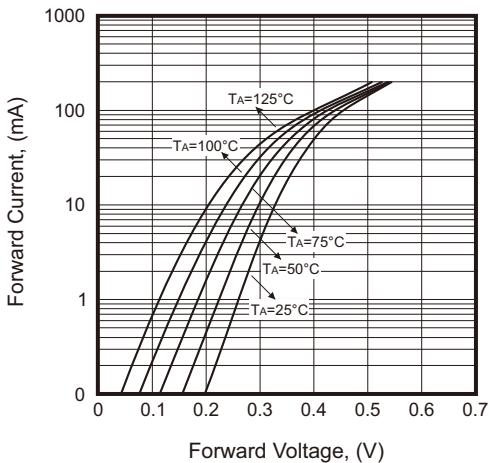


Fig.2 - Reverse Characteristics

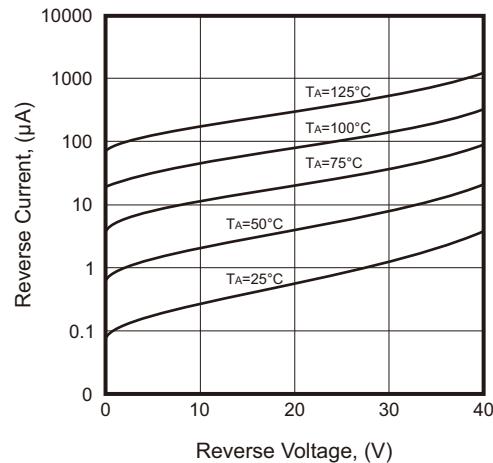


Fig.3 - Capacitance Between Terminals Characteristics






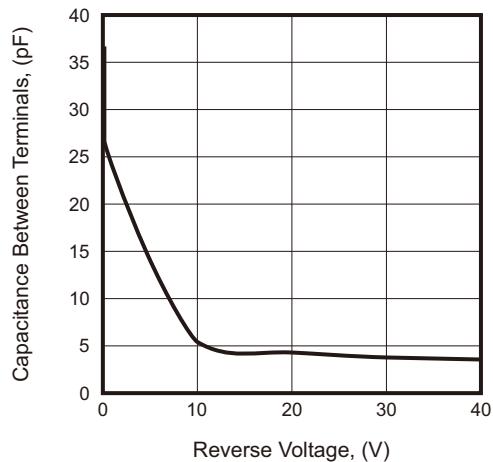


Fig.4 - Current Derating Curve

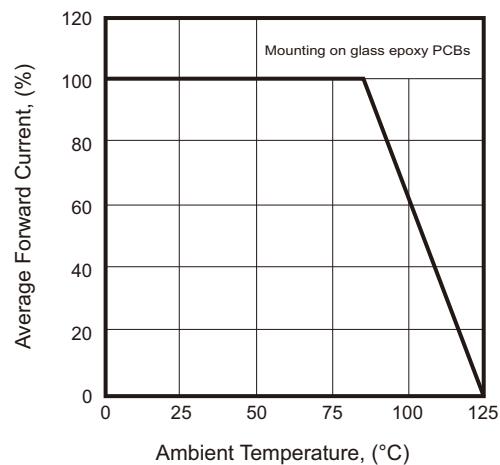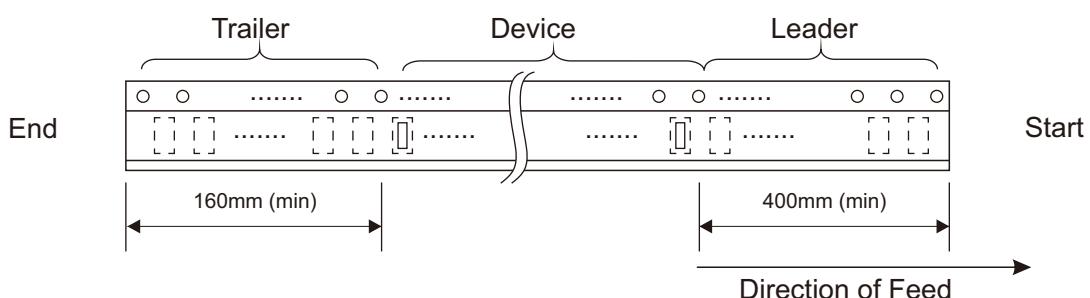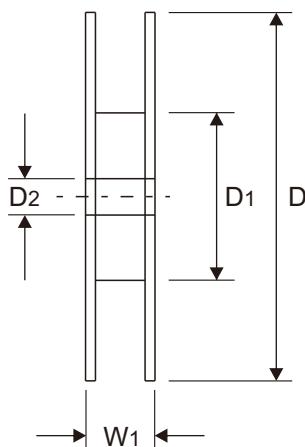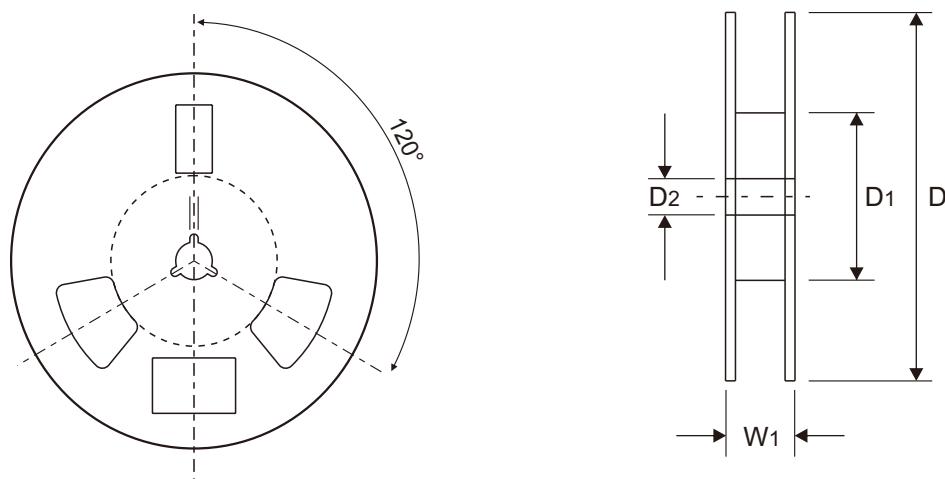

## Reel Taping Specification

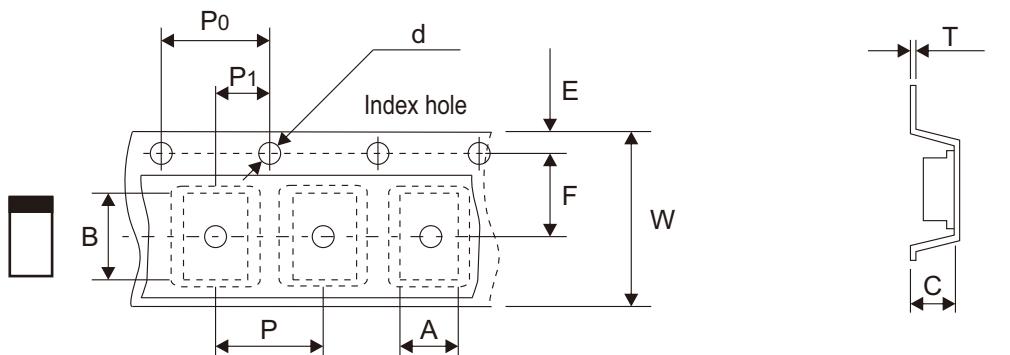

	SYMBOL	A	B	C	d	D	D1	D2
0402 (SOD-923F)	(mm)	$0.75 \pm 0.05$	$1.17 \pm 0.05$	$0.65 \pm 0.05$	$1.50 + 0.10$ $- 0.00$	$178.00 \pm 1.00$	$60.00 \pm 0.50$	$13.50 \pm 0.20$
	(inch)	$0.030 \pm 0.002$	$0.046 \pm 0.002$	$0.026 \pm 0.002$	$0.059 + 0.004$ $- 0.000$	$7.008 \pm 0.039$	$2.362 \pm 0.020$	$0.531 \pm 0.008$

	SYMBOL	E	F	P	P0	P1	T	W	W1
0402 (SOD-923F)	(mm)	$1.75 \pm 0.10$	$3.50 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$2.00 \pm 0.10$	$0.20 + 0.02$ $- 0.05$	$8.00 \pm 0.20$	$12.00 + 0.50$ $- 0.00$
	(inch)	$0.069 \pm 0.004$	$0.138 \pm 0.004$	$0.157 \pm 0.004$	$0.157 \pm 0.004$	$0.079 \pm 0.004$	$0.008 + 0.001$ $- 0.002$	$0.315 \pm 0.008$	$0.472 + 0.020$ $- 0.000$

Company reserves the right to improve product design , functions and reliability without notice.

REV:C


## Marking Code

Part Number	Marking Code
CDBQR0240LR-HF	BX



## Suggested P.C.B. PAD Layout

SIZE	0402/SOD-923F	
	(mm)	(inch)
A	0.750	0.030
B	0.500	0.020
C	0.700	0.028
D	1.250	0.049
E	0.250	0.010

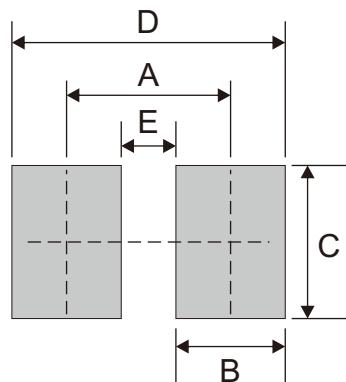

## Standard Packaging

Case Type	REEL PACK	
	REEL ( pcs )	Reel Size (inch)
0402/SOD-923F	5,000	7