


GRACE INERTIA 2.5 TE Internal #: 3-1903388-4 Rectangular Connector Housings, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Housings > STD Temp Sig GRACE INERTIA Plug

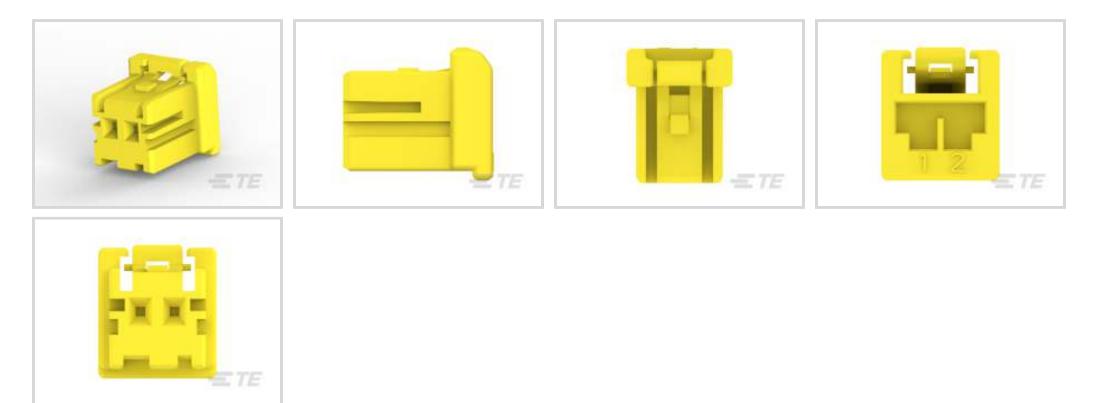

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 2.5 mm [.098 in]

Number of Rows: 1

Housing Material: PBT GF

All STD Temp Sig GRACE INERTIA Plug (63)



Features

Product Type Features

Connector System	Wire-to-Wire					
Connector & Housing Type	Plug					
Sealable	No					
Connector & Contact Terminates To	Wire & Cable					
Configuration Features						
Number of Cavities	2					
Number of Positions	2					
Number of Rows	1					
Electrical Characteristics						
Operating Voltage	250 VAC					
Contact Features						
Contact Layout	Inline					

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Contact Type	Socket
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Color	Yellow
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBT GF
Dimensions	
Connector Height	11 mm[.433 in]
Product Width	9.6 mm[.378 in]
Product Length	8.7 mm[.342 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Halogen Free	No
	Signal

Circuit Identification Feature	Without
ndustry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	1000
Packaging Method	Bag
Product Compliance	
	Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	Compliant Compliant
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-G7534A-P729	TE Part # CAT-G7534A-C1701	TE Part # 1903391-1	TE Part # 1-1903391-2	
STD Temp Sig GRACE INERTIA Plug	STD Temp Sig GRACE INERTIA Cap	GIC 2.5 W CAP HSG 2P NATURAL	GIC 2.5 W CAP HSG 2P RED	

Also in the Series | GRACE INERTIA 2.5

A Contraction of the second se		Contraction of the second	
Connector Contacts(2)	PCB Headers & Receptacles(138)	PCB Latches, Locks & Retainers(5)	Rectangular Connector Housings(49)

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5






Customers Also Bought



2.5 SIGNAL D/LOCK TAB CONT. M	2.5 SIGNAL DBL LOCK REC CONT M	AMP POWER DBL LOCK 1P PLATE	POWER D/LOCK CAP HSG 1P BLACK

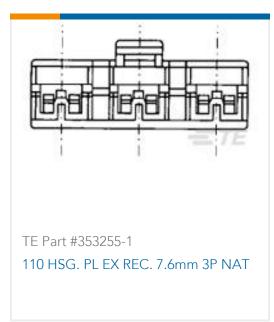

Documents

Product Drawings GIC 2.5 W PLUG HSG 2P YELLOW

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1903388-4_F_c-3-1903388-4-f.2d_dxf.zip

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .098 in [2.5 mm] Centerline, 1 Row, PBT GF, Plug, Socket, Wire & Cable, GRACE INERTIA 2.5



English

Customer View Model ENG_CVM_CVM_3-1903388-4_F_c-3-1903388-4-f.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1903388-4_F_c-3-1903388-4-f.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English