



PART NO: ACFS Series M12 Female M16 Mount Receptacle

Drawing



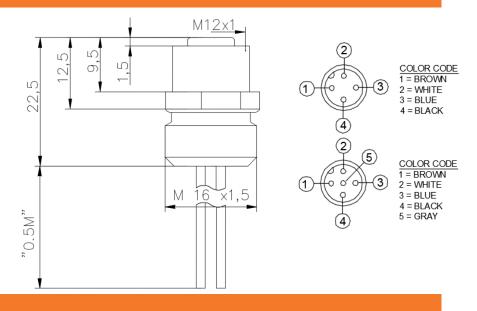

Technical Data

Mechanical

Receptacle Style	M12, Female		
Applicable Standard	IEC 61076-2-101		
Receptacle Threads	Internal		
Housing	Stainless Steel, Leads Epoxy Potted		
Insert	PBT		
Contact	Copper Alloy, Gold Plated		
Mounting Orientation	Front		
Panel Nut	Not Included		
O-Ring	EPDM		
Electrical			
Contact Resistance	≤ 5 mΩ		
Nom. Current @ 40°C	4 A		
Rated Voltage	4 Pole 250 V (IEC) 300V (UL)		
	5 Pole 60 V (IEC) 30V (UL)		
UL File	E485156		
Lead Wires			
AWG	22 AWG (7/30) Tinned Copper		
Insulation	PVC		
Outside Diameter	0.062" Nominal		
Lead Length	0.5 Meters (19.7")		
UL Style	AWM 1007 & 1569		
CSA Style	TR64		
Environmental			



PART NO: ACFS Series M12 Female M16 Mount Receptacle

Degree of Protection		IP 67/ NEMA 6P		
Operating Temperature Range		-25C (-13F)/ +70C (+158F)		
CE		All materials used in the rethis part meet the require European Directive 2011/the restriction of use of cosubstances in electrical arequipment. Exemption us	ements of '65/EU regarding ertain hazardous nd electronic	
REACH Regulation (EC 1907/2006)		This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.		
Ordering Information	Desc	cription	Quantity	
	Г	•	· •	
306ACFS NC404	4 Pin		Each	
309ACFS NC404	5 Pin Each			

Although Alpha Wire ("Alpha") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability. Alpha provides the information and specification herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Alpha be liable any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Alpha has been advised of the possibility of such damages, whether in an action under contact, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specification described herein.