



REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
A1		REVISED PER ECO-13-008788	23MAY2013	DLD MDB
A2		REVISED PER ECO-14-001805	06FEB2014	DLD MDB




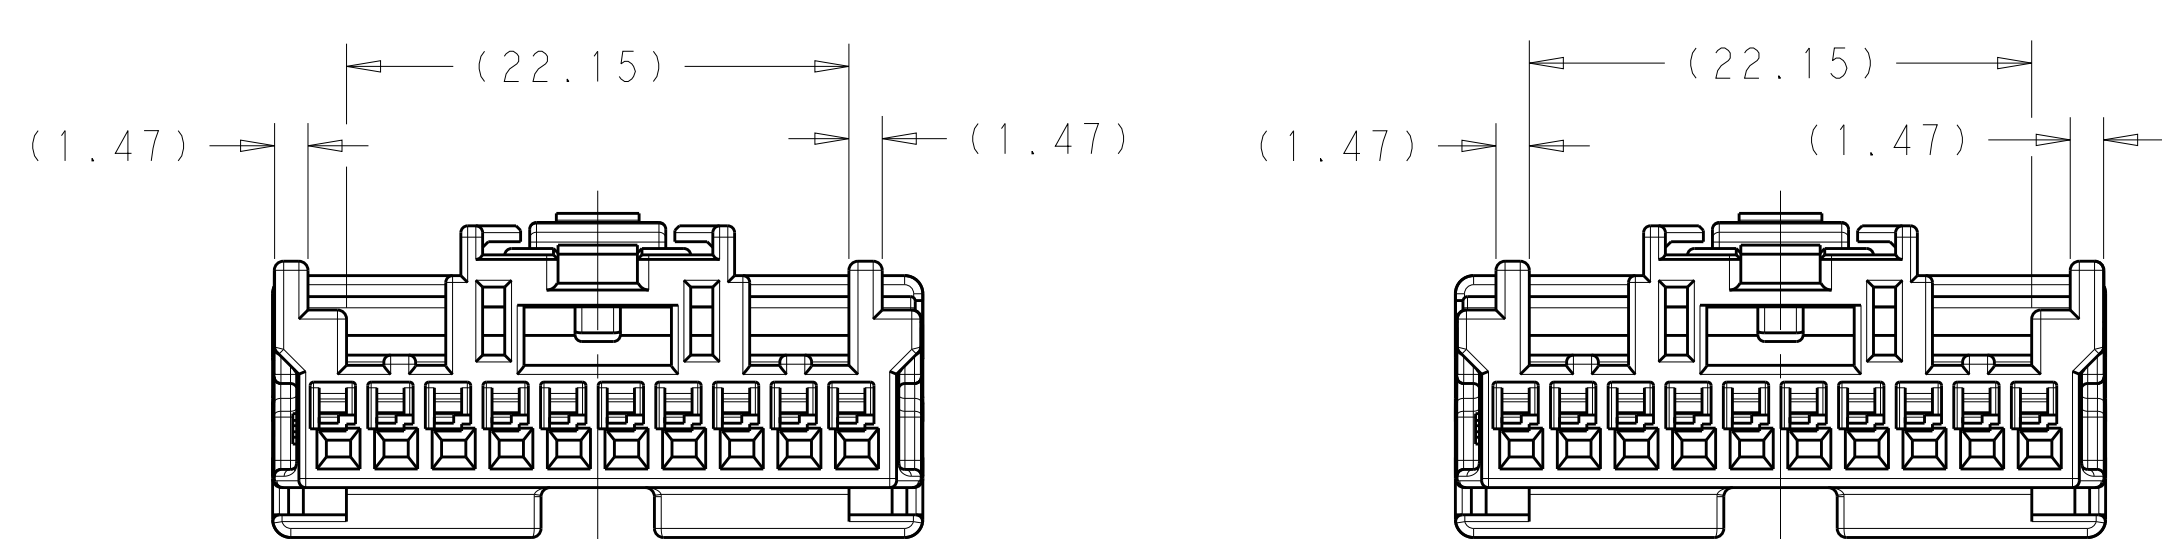


KEYING OPTION B
SCALE 3:1

KEYING OPTION D
SCALE 3:1

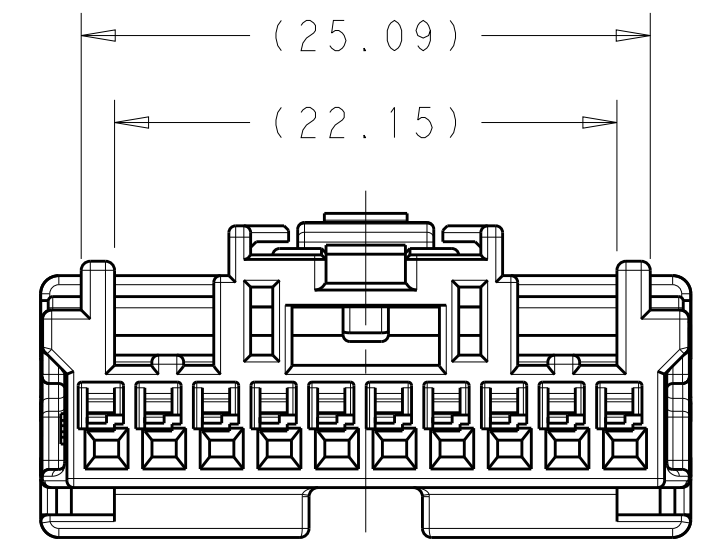


KEYING OPTION F
SCALE 3:1

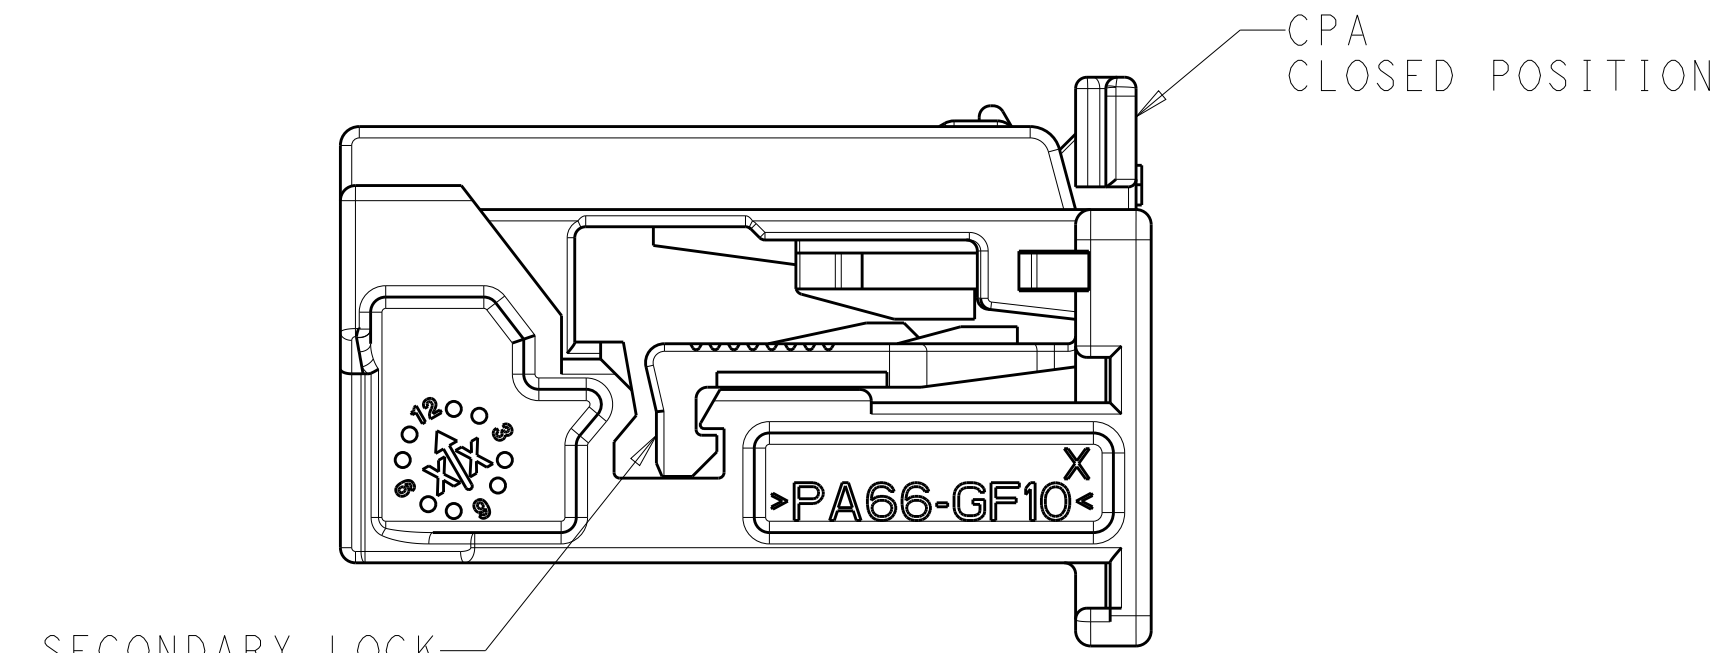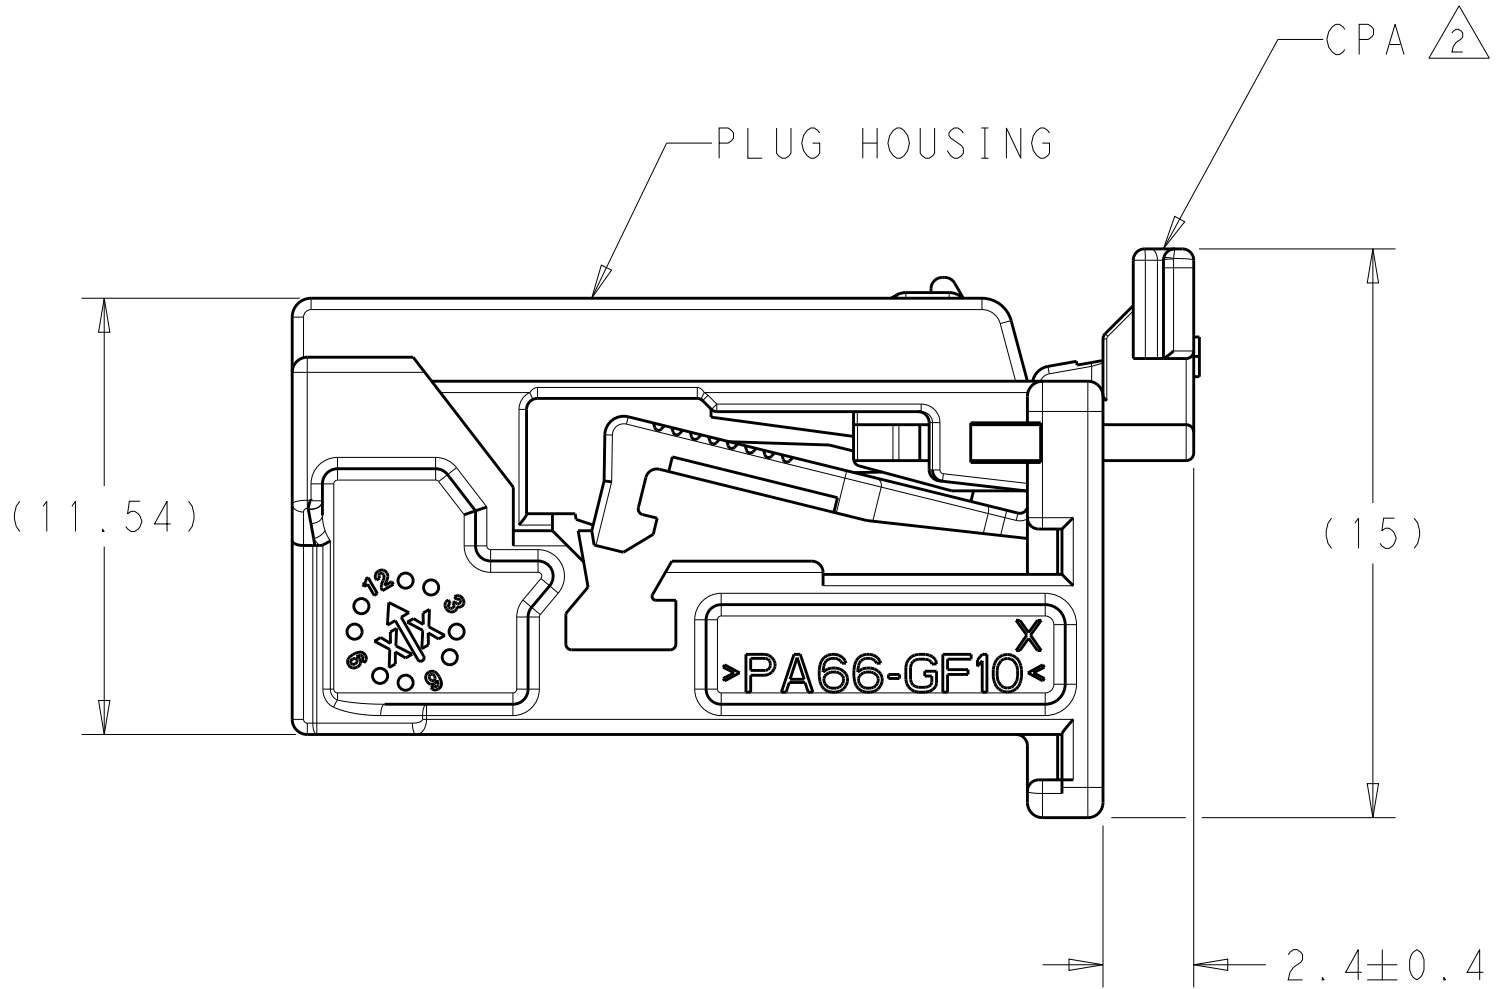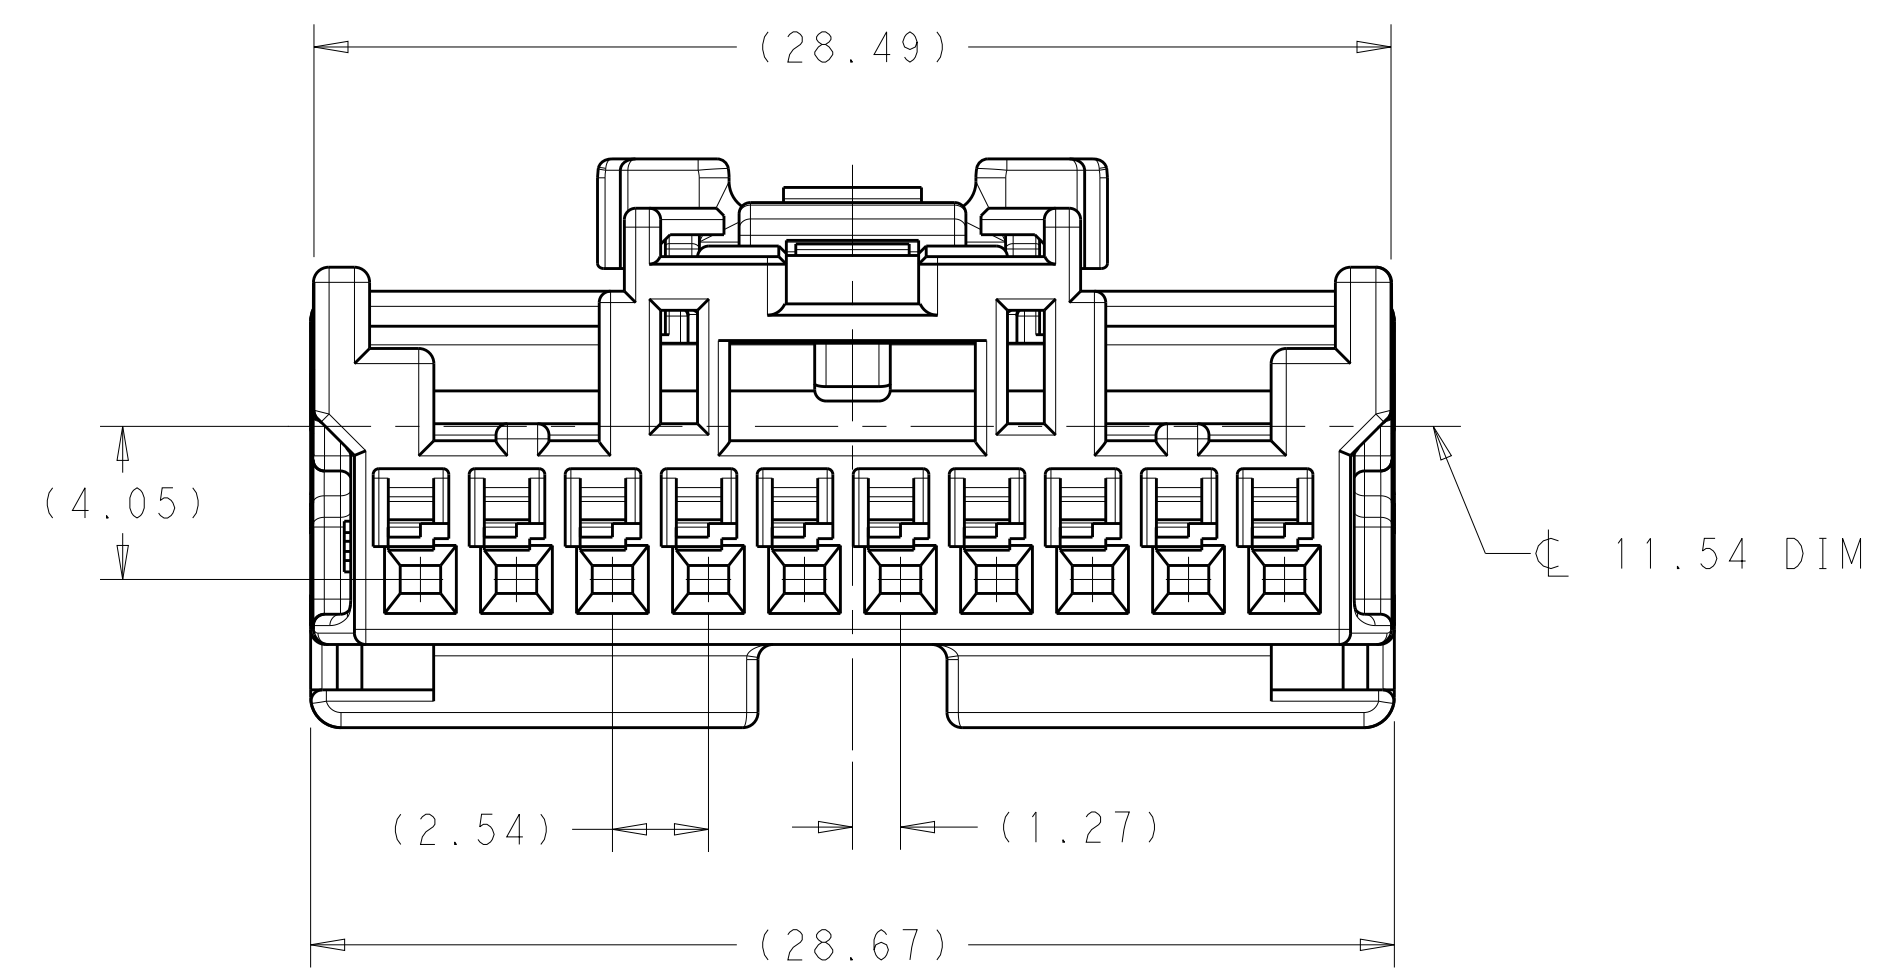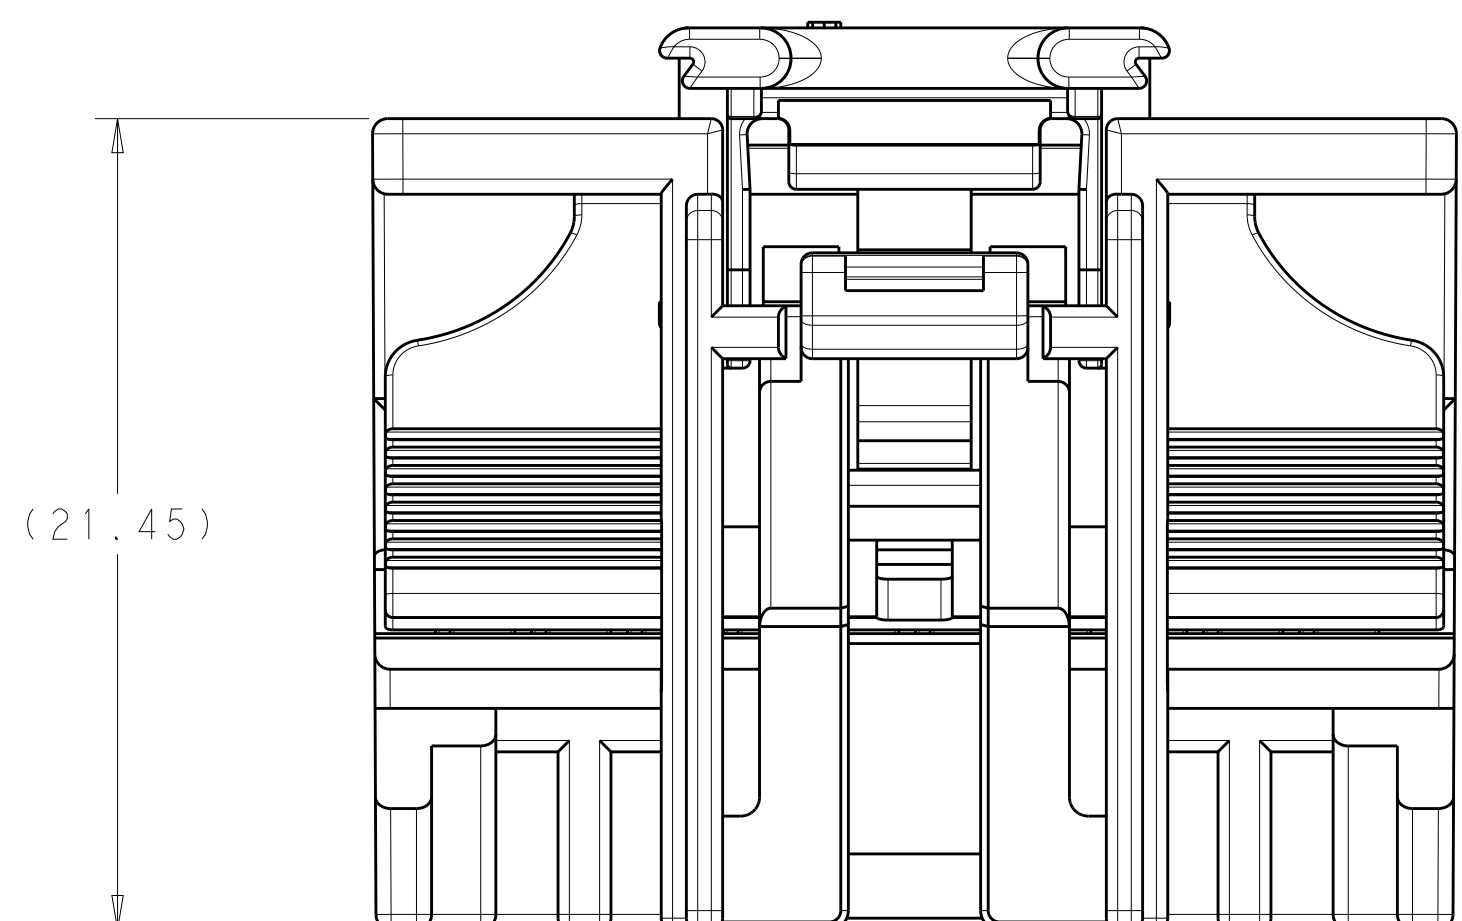

2138504-1 AS ASSEMBLED

- △ MATERIAL: PLUG HOUSING - PA66, 10% GLASS FILLED, NATURAL (BROWN)
CPA - PA66, 35% GLASS FILLED, NATURAL (WHITE).
- △ CPA SHOWN IN PRE-STAGED, AS SHIPPED, POSITION.
- 3. PLUG ASSEMBLY MATES WITH USCAR INTERFACE DRAWING 064-U-010-1-Z04, REVISION LEVEL C.
- 4. PLUG ASSEMBLY WILL ACCEPT THE FOLLOWING TERMINAL PART NUMBERS BASED ON ENVIRONMENT DEFINITION:
2035170-1, 2035170-2 (FOR CONNECTOR ENVIRONMENTS T3 AND BELOW)
AND 20981651, 20981652 (FOR TRANSMISSION SPECIFIC ENVIRONMENTS WITH TEMPERATURE RATING OF T3 TRANSMISSION).
THE MAXIMUM ALLOWABLE INSULATION DIAMETER IN ANY CASE IS 1.65mm.
- △ PART NUMBERS MARKED AS PRELIMINARY HAVE NOT BEEN RELEASED PER FORMAL QUALIFICATIONS.
- 6. NOTE REMOVED.
- 7. ASSEMBLY IS SHIPPED WITH SECONDARY LOCK IN THE PRE-LOCK POSITION AS SHOWN. SECONDARY LOCK MAY CLOSE INADVERTENTLY DURING SHIPPING. IF THIS OCCURS, RELOCATE SECONDARY LOCK TO THE OPEN POSITION PRIOR TO INSERTION OF TERMINALS. SEE INSTRUCTION SHEET 408-32069 FOR OTHER DETAILED ASSEMBLY INSTRUCTIONS.

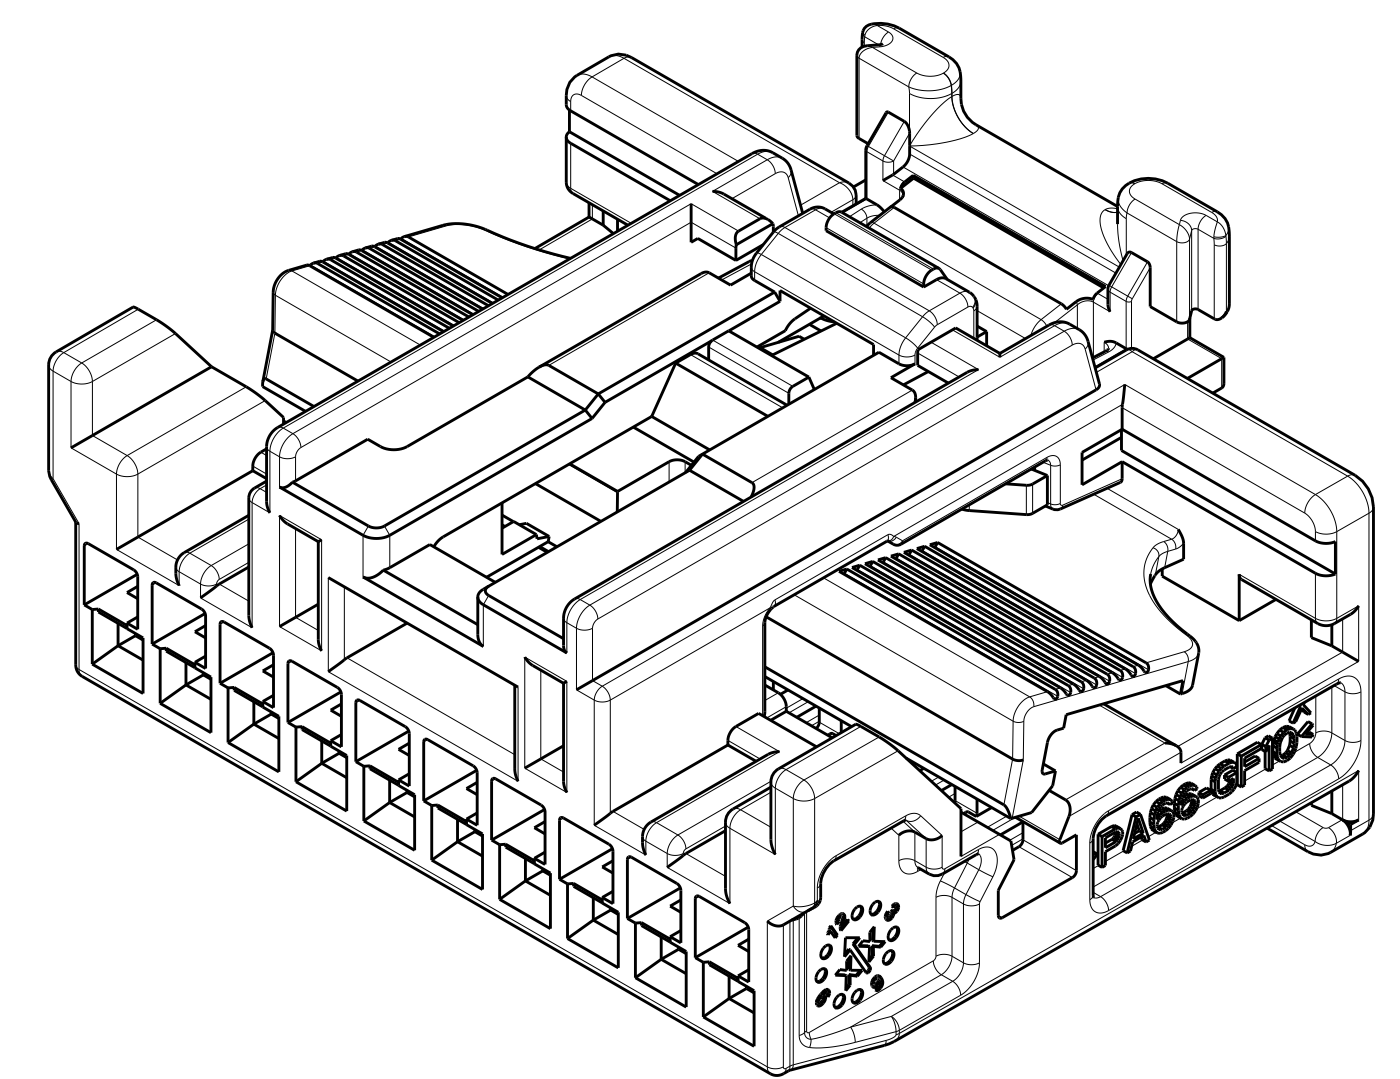

PRELIMINARY	F	2138504-4
PRELIMINARY	D	2138504-3
PRELIMINARY	B	2138504-2
RELEASED	A	2138504-1
AVAILABILITY	KEYING OPTION	PART NUMBER

2138504-1 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: R. WHITAKER 29APR2011	
DIMENSIONS: mm		CHK: D. BROWN 29APR2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: D. BROWN 29APR2011	
0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		NAME: ASSEMBLY, 10 POSITION, SINGLE PIECE, GENERATION Y	
MATERIAL: △	FINISH: -	WEIGHT: -	RESTRICTED TO: -
CUSTOMER DRAWING		SIZE: A1	SCALE: 5:1
		CAGE CODE: 100779	DRAWING NO: 2138504
		SHEET: 1	OF: 1
		REV: A2	