


1. Wiring Diagram.

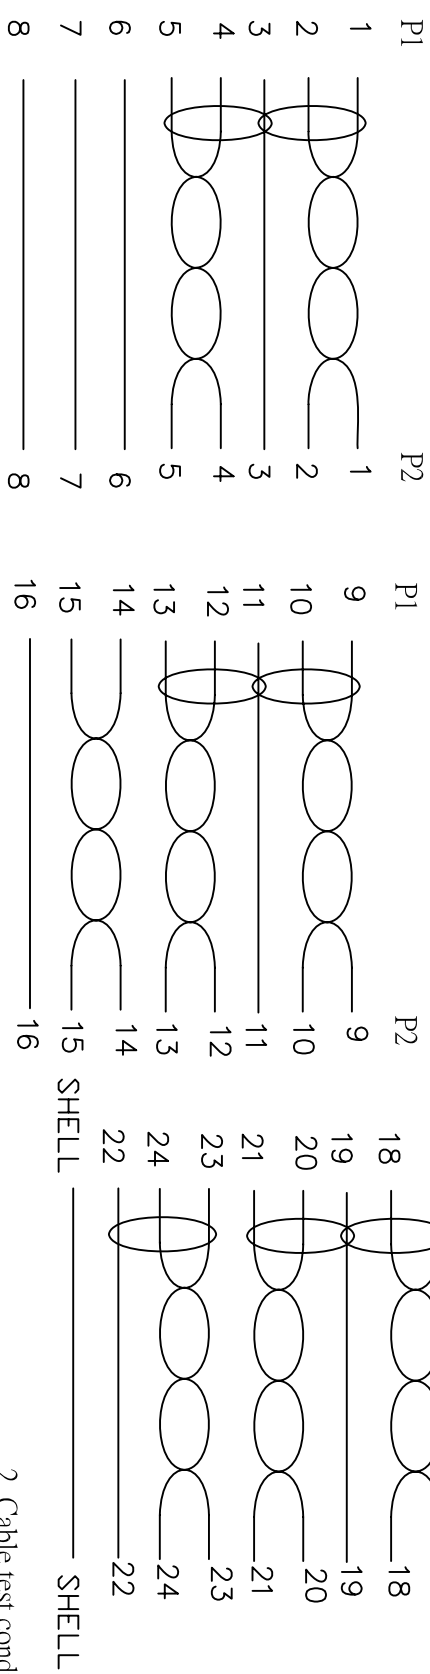

10	TUBE	HEAT SHRINK TUBE OD2.0,mm L:8mm	14
9	TUBE	HEAT SHRINK TUBE OD1.5,mm L:15mm	8
8	TUBE	HEAT SHRINK TUBE OD1.0mm L:25mm	2
7	COPPER	COPPER FOIL W/30mm*L75mm	2
6	SCREW	#4-40UNC RE34 WHITE	4
5	PE	LLDPE 500026 6201	20g
4	PVC	45P PVC WHITE DVERMOLD	50g
3	FERRITE	OD17.5*L28.5*ID9.5	2
2	CONN	DVI24+1 MALE G/F INSULATION BLACKSHELL NICKEL PIN G/F	2
1	CABLE	UL20276 (28AWG (7/0.12TC) *IP+D28AWG(7/0.12TC)+AL/MY{*7+28AWG(7/0.12TC)*IP+28AWG (7/0.12TC) *3C+A+B (96/0.12AM) OD8.6 BLACK	1
NO.	PART NO.	DESCRIPTION	QTY
		UNIT/REF	

2. Cable test condition:
 Open/Short :100%
 Insulation resistance:5M ohm
 Contact resistance:2 ohm
 Hipot: DC 300V/1 sec
 3.Each pcs with PE polybage

A	INITIAL RELEASE	2014/08/24
REV/BGN#	DESCRIPTION	DATE
	P/N: 751-10011-00300	REV A
Cnc Tech,LLC TITLE: CBL DVI24+1 MALE TO VGA 24+1 MALE		
DRAWN: WENC	DATE: 08/24/14	CUSTOMER P/N:
CHECKED: EDWIN	DATE: 08/24/14	CUSTOMER:
APPROVAL:		SHEET 1 OF 1